



### ROOF PROFILE LAP

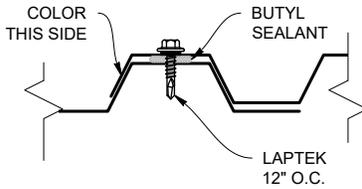

### WALL PROFILE LAP

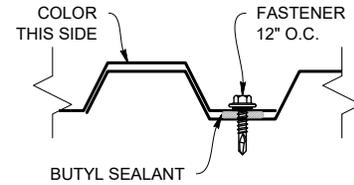

### KEY FEATURES

- 24 and 22 Tru-Gauge™ and .032" Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 3' to 20'10" (For longer length panels, please inquire)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Structural panel that will span up to 5'
- Manufactured in Salem OR and Sacramento CA
- OverEZee™ retro-fit systems available

### TESTING

- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zinalume/Galvalume AZ-50/55

### WEIGHT CHART

4.0 Rib	WIDTH	24 GA STEEL	22 GA STEEL	.032 ALUM	.040 ALUM
THICKNESS		0.0236"	0.0285"	0.032"	0.040"
WEIGHT/LINFT	32"	3.606 LBS.	4.354 LBS	1.709 LBS	2.138 LBS
WEIGHT/LSQFT	32"	1.352 LBS	1.633 LBS	0.641 LBS	0.802 LBS

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
25 PSF<0.01 CFM/ft²-PASS	50 PSF - PASS