


### LAP DETAIL

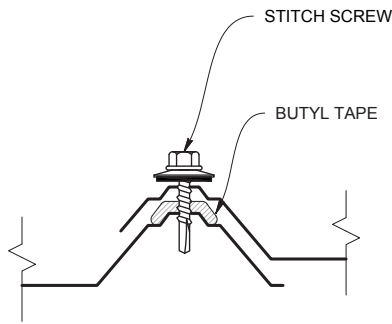

### KEY FEATURES

- 29 & 26 gauge Tru-Gauge™
- ASTM 653 & 792
- UL Class A Fire rated and UL Class 4 Impact (hail) rated
- Recommended minimum pitch 3:12
- Custom lengths 1' to 45' - No short length cut change  
(For longer lengths please inquire)
- Long length flashings available up to 20'11"
- Fiberglass and Polycarbonate skylight panels available to match profile
- Panel is available in a wide variety of "Cool" baked on ArmorTech™ colors
- Easy-to-order standard and custom made trim and accessory packages available
- Color matched neoprene washed screws

Allowable Live Load in PSF			Span in feet (steel only)				
SPAN TYPE	GAUGE	KSI	2'	2' 6"	3'	3' 6"	4'
SINGLE SPAN	26	80	112	72	50	36	28
DOUBLE SPAN	26	80	95	61	42	32	24
THREE OR MORE SPANS	26	80	119	76	53	39	29
SINGLE SPAN	29	80	86	55	39	28	22
DOUBLE SPAN	29	80	72	46	32	24	18
THREE OR MORE SPANS	29	80	90	52	40	29	23


### MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ Painted Steel .015" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 26 gauge ArmorTech™ Painted Steel .019" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 29 & 26 gauge bare Zinalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 29 & 26 gauge bare G-90 Galvanized (No finish warranty – 25 yr. perforation warranty)

Standard Panel Weights		
Gauge	LBS SQFT	LBS LF
29	0.67	2.02
26	0.9	2.7












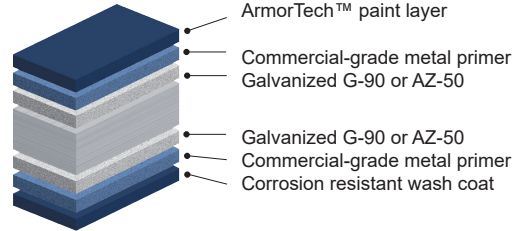












### KEY FEATURES

- 22 Standard Colors, Zinalume® Plus and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
  - fading
  - chalking
  - chipping
  - cracking
  - peeling



### 40-Year Residential Manufacturer's Limited Warranty

### STANDARD COOL ARMORTECH™ SMP COLORS

 Glacier White SRI-65	 Stone White SRI-71	 Ivory SRI-68	 Light Stone SRI-68	 Sandstone SRI-55	 Hickory SRI-48	 Ash Grey SRI-58
 Sand Gold SRI-61	 Desert Brown SRI-24	 Cocoa Brown SRI-27	 Kodiak Brown SRI-22	 Weathered Copper SRI-24	 Tile Red SRI-32	 Black SRI-24
 Sterling Grey SRI-43	 Charcoal Grey SRI-25	 Sage Green SRI-31	 Forest Green SRI-32	 Pine Green SRI-29	 Tahoe Blue SRI-25	 Pacific Blue SRI-25
 Copper Penny SRI-60	 Zinalume® Plus SRI-65 No finish warranty – 25 yr. perforation warranty	 Galvanized G-90 No finish warranty – no perforation warranty	<p>These printed chips provide a close representation of the colors. Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***</p>			

