



## KEY FEATURES


- 26, 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum \*
- 1/2:12 to 3:12 minimum pitch recommended when installed with butyl sealant (*please inquire for specific pitch recommendations for each profile*)
- Factory-notched and tabbed panels available
- Long length flashings available up to 20' 10"
- Concealed fasteners: fasteners cannot leak
- Onsite roll-forming available (*inquire*)
- Panel options: Striations, Accent Ribs, Flat Pan (*varies by panel, inquire*)
- OverEzee retro-fit systems available

## TESTING


-  ICC EVALUATION SERVICE™ ICC-ESR #5045 & #5046 with CBC-CRC Supplement \*
  -  Code compliance UL Evaluation Report UL ER #25913-01. UL 580 Class 90 - Wind Uplift
  - UL 790 Class A (ASTM E108) - Fire rated
  - UL 2218 Class 4 - Impact (hail) rated
  - ASTM E1680 - Air infiltration (roof)
  - ASTM E1646 - Water infiltration (roof)
  - ASTM E1592 - Negative structural uniform static air pressure \*
  - ASTM E330 - Positive structural uniform static air pressure \*
  - ASTM E331 - Water infiltration (wall)
  - ASTM E283 - Air infiltration (wall)
  - ASTM A653/A924 - G90 Galvanized
  - ASTM A792 - Zincalume/Galvalume AZ-50/55
  - ASTM B209 - Aluminum Substrate
- \* Contact salesman for list of conforming panels

## Mechanical Seam Panel Profiles


**MS-100™**



**MS-150™**




**MS-200™**




## Snap Lock Panel Profiles


**Versa-Span™**




**Easy-Lock™**




**Clip-Lock™**



**Slim-Lock™**



**T-Panel™**



**Premier-Lock™**



**StreamLine™**




## MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲ 22 Tru-Gauge™ Kynar 500® Painted Steel
- ◆ .032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge™ bare Zinalume® Plus AZ-55  
(No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .040" Kynar 500® Painted Aluminum (please inquire)
- 24 Tru-Gauge™ Bonderized
- 22 gauge Rusteel Plus™ (A606)
- Custom 20 & 18 Tru-Gauge™ and .050" and .063" Aluminum (please inquire)
- 16 OZ & 20 OZ Real Copper
- Kynar 500® and substrate testing data available  
(See website)

## FINISHES


- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Colors
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications
- “Oil Canning” is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection

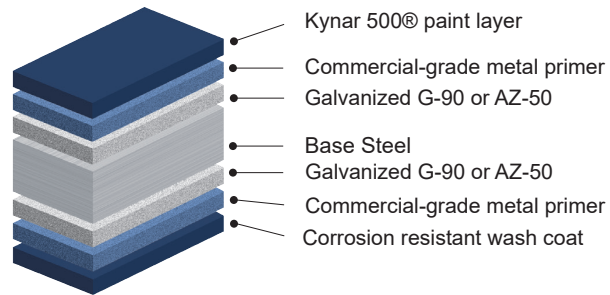


## STANDARD COOL KYNAR 500® COLORS

▲ 22 Tru-Gauge™


◆ .032 Aluminum

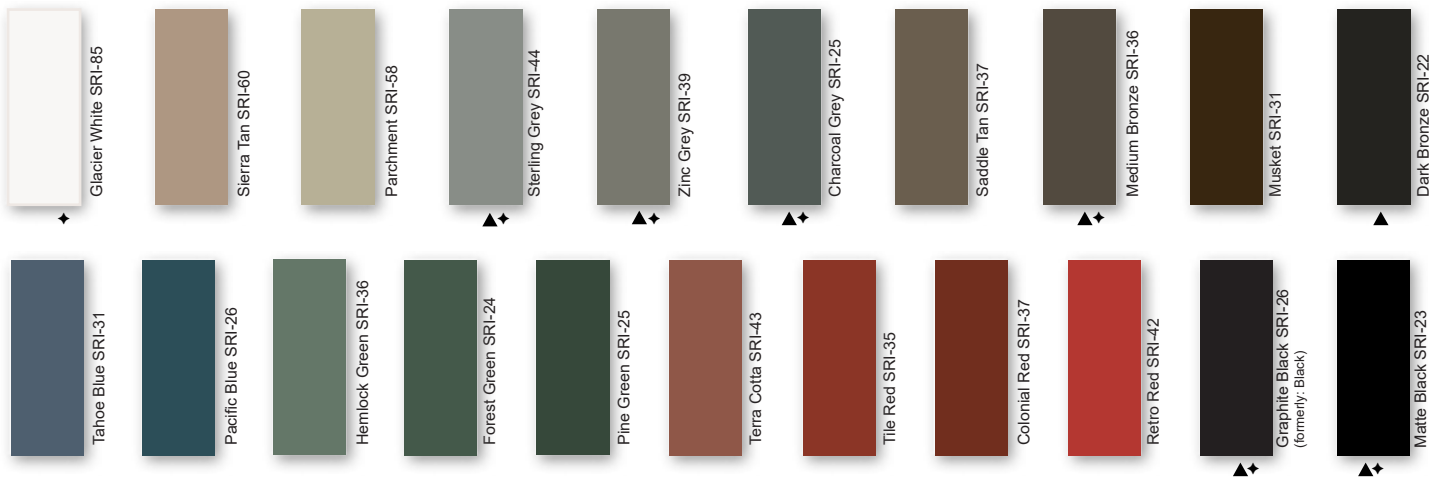

## PREMIUM METALLIC COOL KYNAR® COLORS

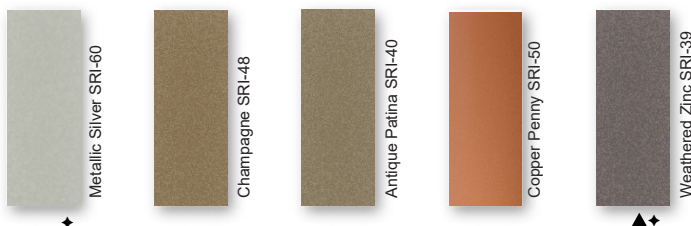

## SPECIALIZED MATERIAL

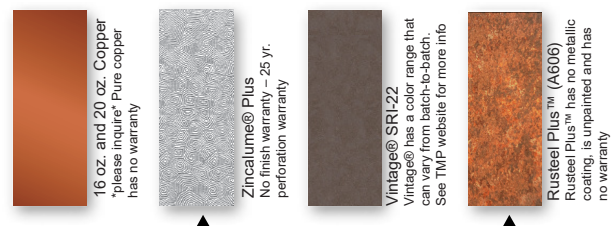

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1890 and are based on actual testing.\*\*\*Oil canning is not a cause for material rejection\*\*\*



Rev. Date 02-24