




#### LAP DETAIL




#### ROOF & WALL PROFILE

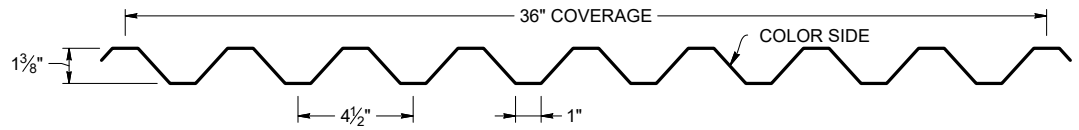

#### LAP DETAIL



#### OPTIONAL WALL PROFILE

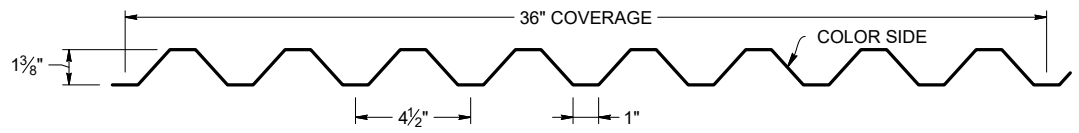

### KEY FEATURES

- 24 and 22 Tru-Gauge™ and .032" Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (*please inquire*)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 3' to 20' 10" (*For longer length panels, please inquire*)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (*please inquire*)
- Structural panel that will span up to 6'
- Manufactured in Salem OR and Riverside CA
- OverEZee™ Retro-fit systems available

### TESTING

- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zinalume/Galvalume AZ-50/55

### WEIGHT CHART

CLASSIC V-RIB	WIDTH	24 GA STEEL	22 GA STEEL	.032 ALUM	.040 ALUM
THICKNESS		0.0236"	0.0285"	0.032"	0.040"
WEIGHT/LINFT	36"	3.851 LBS.	4.651 LBS	1.825 LBS	2.281 LBS
WEIGHT/LSQFT	36"	1.284 LBS	1.550 LBS	0.608 LBS	0.760 LBS

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
25 PSF<0.01 CFM/r²-PASS	50 PSF - PASS

## POSITIVE & NEGATIVE LOAD CHART

SECTION PROPERTIES				ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)																					
				Top In Compression			Bottom In Compression			Inward Load (Negative)									Outward Load (Positive)						
				$I_{xx}$ in <sup>4</sup> /ft.	$I_{yy}$ (eff) in <sup>4</sup> /ft.	$S_{xx}$ in <sup>3</sup> /ft.	$I_{xx}$ in <sup>4</sup> /ft.	$I_{yy}$ (eff) in <sup>4</sup> /ft.	$S_{xx}$ in <sup>3</sup> /ft.	2.5'	3'	3.5'	4'	4.5'	5'	9'	10'	2.5'	3'	3.5'	4'	4.5'	5'	9'	10'
26	36	80	1.18	0.0850	0.0860	0.0980	0.0870	0.0860	0.1080	627.2	435.6	320.0	245.0	193.6	156.8	48.4	39.2	691.2	480.0	352.7	270.0	213.3	172.8	53.3	43.2
24	36	50	1.22	0.1130	0.1140	0.1440	0.1160	0.1150	0.1470	576.0	400.0	293.9	225.0	177.8	144.0	44.4	36.0	588.0	408.3	300.0	229.7	181.5	147.0	45.4	36.8
22	36	50	1.53	0.1400	0.1400	0.1740	0.1400	0.1400	0.1790	696.0	483.3	355.1	271.9	214.8	174.0	53.7	43.5	716.0	497.2	365.3	279.7	221.0	179.0	55.3	44.8
20	36	33	1.92	0.1770	0.1770	0.2220	0.1770	0.1770	0.2210	532.8	370.0	271.8	208.1	164.4	133.2	41.1	33.3	530.4	368.3	270.6	207.2	163.7	132.6	40.9	33.2
18	36	33	2.40	0.2300	0.2300	0.2870	0.2300	0.2300	0.2870	688.8	478.3	351.4	269.1	212.6	172.2	53.2	43.1	688.8	478.3	351.4	269.1	212.6	172.2	53.2	43.1


- Theoretical section properties have been calculated per AISI 2012 North American Specifications for Design of Cold-Formed Steel Structural Members.
- Allowable load is calculated in accordance with AISI 2012 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
- Allowable load does not address web crippling, fasteners, connection strength or support material.
- Panel weight is not considered.
- Load/Span values are based on theoretical computations and not load testing.
- Deflection is not considered.
- Allowable loads do not include a 1/3 stress increase for wind.

## POSITIVE & NEGATIVE LOAD CHART

SECTION PROPERTIES				ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)																					
				Top In Compression			Bottom In Compression			Inward Load (Negative)									Outward Load (Positive)						
				$I_{xx}$ in <sup>4</sup> /ft.	$I_{yy}$ (eff) in <sup>4</sup> /ft.	$S_{xx}$ in <sup>3</sup> /ft.	$I_{xx}$ in <sup>4</sup> /ft.	$I_{yy}$ (eff) in <sup>4</sup> /ft.	$S_{xx}$ in <sup>3</sup> /ft.	2.5'	3'	3.5'	4'	4.5'	5'	9'	10'	2.5'	3'	3.5'	4'	4.5'	5'	9'	10'
26	36	80	1.18	0.0850	0.0860	0.0980	0.0870	0.0860	0.1080	627.2	435.6	320.0	245.0	193.6	156.8	31.1	22.7	691.2	480.0	352.7	270.0	213.3	172.8	31.1	22.7
24	36	50	1.22	0.1130	0.1140	0.1440	0.1160	0.1150	0.1470	576.0	400.0	293.9	225.0	177.8	144.0	41.2	30.0	588.0	408.3	300.0	229.7	181.5	147.0	41.5	30.3
22	36	50	1.53	0.1400	0.1400	0.1740	0.1400	0.1400	0.1790	696.0	483.3	355.1	271.9	214.8	174.0	50.6	36.9	716.0	497.2	365.3	279.7	221.0	179.0	50.6	36.9
20	36	33	1.92	0.1770	0.1770	0.2220	0.1770	0.1770	0.2210	532.8	370.0	271.8	208.1	164.4	133.2	41.1	33.3	530.4	368.3	270.6	207.2	163.7	132.6	40.9	33.2
18	36	33	2.40	0.2300	0.2300	0.2870	0.2300	0.2300	0.2870	688.8	478.3	351.4	269.1	212.6	172.2	53.2	43.1	688.8	478.3	351.4	269.1	212.6	172.2	53.2	43.1

- Theoretical section properties have been calculated per AISI 2012 North American Specifications for Design of Cold-Formed Steel Structural Members.
- Allowable load is calculated in accordance with AISI 2012 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
- Allowable load does not address web crippling, fasteners, connection strength or support material.
- Panel weight is not considered.
- Load/Span values are based on theoretical computations and not load testing.
- Deflection consideration is limited by a maximum deflection ratio of L/120 of span.
- Allowable loads do not include a 1/3 stress increase for wind.

## PANEL ATTACHMENT

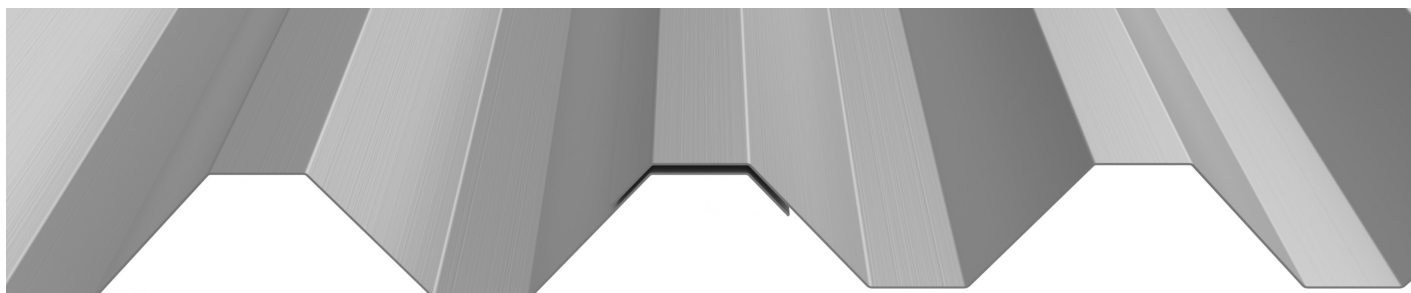

### Fastener Notes:

- When possible, lap panels away from prevailing wind direction.
- 15/32" OSB: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- 15/32" Plywood: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- Dimensional lumber: #10 GP. Screws should penetrate the lumber 1".
- 16GA (or less) steel furring: #12 Fastener with DP-1
- Sidelaps fasten with #14 LapTek screws.
- All trim screws used for roof or wall applications should have EPDM sealing washers.
- Fastener spacing is based on project specific structural requirements. Consult a licensed engineer.


## POSITIVE & NEGATIVE LOAD CHART

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)															
Gauge	Width, in.	Yield ksi	Weight psf	Topin Compression			Bottom In Compression			Inward Load (Negative)							Outward Load (Positive)								
				$I_{xx}$ in <sup>4</sup> /ft	$I_{xx}$ (eff) in <sup>4</sup> /ft	$S_{xx}$ in <sup>3</sup> /ft	$I_{xx}$ in <sup>4</sup> /ft	$I_{xx}$ (eff) in <sup>4</sup> /ft	$S_{xx}$ in <sup>3</sup> /ft	2.5'	3'	3.5'	4'	4.5'	5'	9'	10'	2.5'	3'	3.5'	4'	4.5'	5'	9'	10'
26	36	80	1.18	0.0850	0.0860	0.0980	0.0870	0.0860	0.1080	627.2	435.6	320.0	235.9	165.7	120.8	20.7	15.1	691.2	480.0	352.1	235.9	165.7	120.8	20.7	15.1
24	36	50	1.22	0.1130	0.1140	0.1440	0.1160	0.1150	0.1470	576.0	400.0	293.9	225.0	177.8	144.0	27.5	20.0	588.0	408.3	300.0	229.7	181.5	147.0	27.7	20.2
22	36	50	1.53	0.1400	0.1400	0.1740	0.1400	0.1400	0.1790	696.0	483.3	355.1	271.9	214.8	174.0	33.7	24.6	716.0	497.2	365.3	279.7	221.0	179.0	33.7	24.6
20	36	33	1.92	0.1770	0.1770	0.2220	0.1770	0.1770	0.2210	532.8	370.0	271.8	208.1	164.4	133.2	41.1	31.1	530.4	368.3	270.6	207.2	163.7	132.6	40.9	31.1
1B	36	33	2.40	0.2300	0.2300	0.2870	0.2300	0.2300	0.2870	688.8	478.3	351.4	269.1	212.6	172.2	53.2	40.4	688.8	478.3	351.4	269.1	212.6	172.2	53.2	40.4


1. Theoretical section properties have been calculated per AISI 2012 North American Specifications for Design of Cold-Formed Steel Structural Members.
2. Allowable load is calculated in accordance with AISI 2012 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
3. Allowable load does not address web crippling, fasteners, connection strength or support material.
4. Panel weight is not considered.
5. Load/Span values are based on theoretical computations and not load testing.
6. Deflection consideration is limited by a maximum deflection ratio of L/180 of span.
7. Allowable loads do not include a 1/3 stress increase for wind.

### FASTENER DIAGRAM


#### ROOFING INSTALL



#### SIDING INSTALL

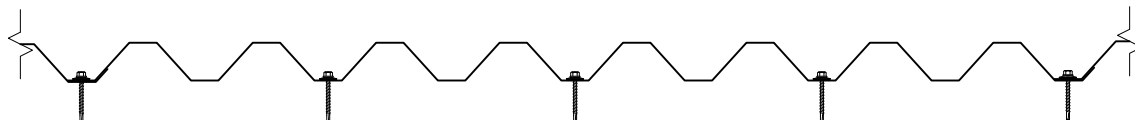

### PANEL ATTACHMENT

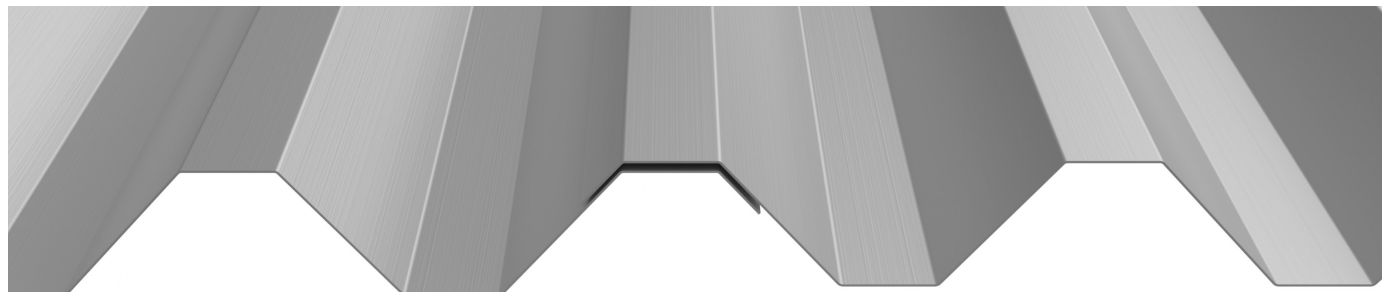

#### Fastener Notes:

- When possible, lap panels away from prevailing wind direction.
- 15/32" OSB: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- 15/32" Plywood: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- Dimensional lumber: #10 GP. Screws should penetrate the lumber 1".
- 16GA (or less) steel furring: #12 Fastener with DP-1
- Sidelaps fasten with #14 LapTek screws.
- All trim screws used for roof or wall applications should have EPDM sealing washers.
- Fastener spacing is based on project specific structural requirements. Consult a licensed engineer.