

Exposed Fastener Collection

ROOF AND WALL PANELS



RIVERSIDE CA | SACRAMENTO CA | SALEM OR | AUBURN WA | SPOKANE WA

Table of Contents

ROOF AND WALL PANELS

3	Tuff Rib & T-3™
4	PBR & GR-7™
5	Marion “R” Panel™ & Classic 7/8” Corrugated™
6	Max Corr™ & 2-1/2” Corrugated
7	HR-34™ & TR-7.2
8	BR-36 & 4.0 Rib
9	Classic V-Rib™
10	Vertical Panel Series
11	Cladding Series
12	Long Span Series
13	Deep Rib Series
14	Ribbed Series

ADDITIONAL INFORMATION

9	Fasteners
15	Standard Color Finishes

Tuff Rib

KEY FEATURES

29 and 26 Tru-Gauge™

3:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 45' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws



Roof and Vertical or Horizontal Wall application

Perforated options available (please inquire)

Fiberglass & Polycarbonate panels available to match profile

Manufactured in Salem OR and Riverside CA

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM E455-19

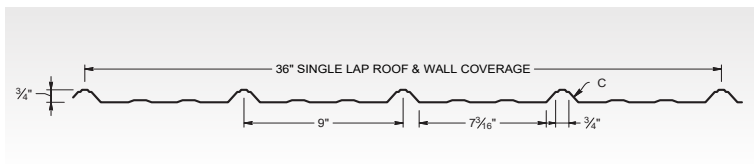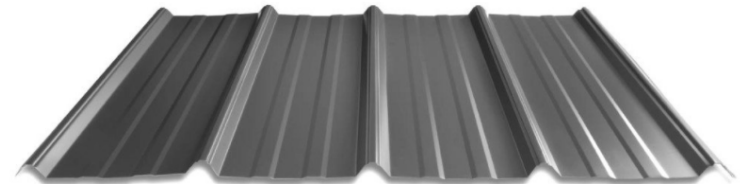

T-3™

KEY FEATURES

29, 26, 24 & 22 Tru-Gauge™ and .032" Aluminum and Rusteel Plus™

3:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 45' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application



Perforated options available (please inquire)

Fiberglass & Polycarbonate panels available to match profile

Manufactured in Salem OR

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM E455-19

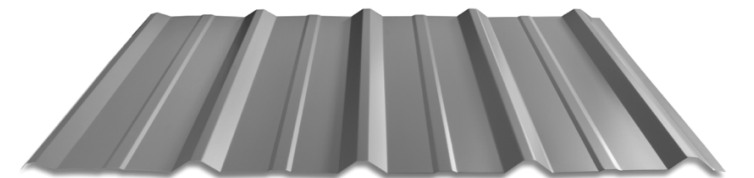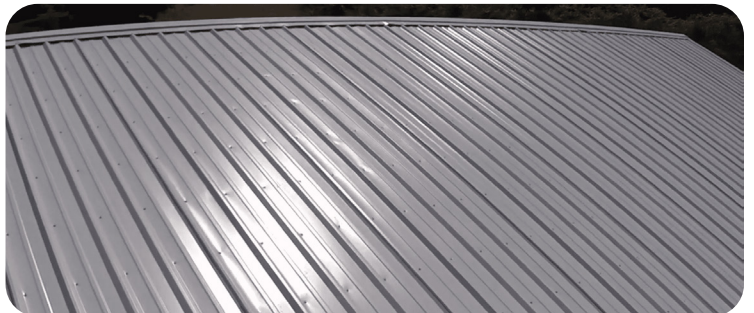

Roof & Wall Profile



Optional Wall Profile



PBR

KEY FEATURES

26, 24 & 22 Tru-Gauge™ and .032" Aluminum

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 45' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application


Perforated options available (please inquire)

Fiberglass & Polycarbonate panels available to match profile


Manufactured in Salem OR, Sacramento CA and Riverside CA

OverEZee™ retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209, ASTM E455-19

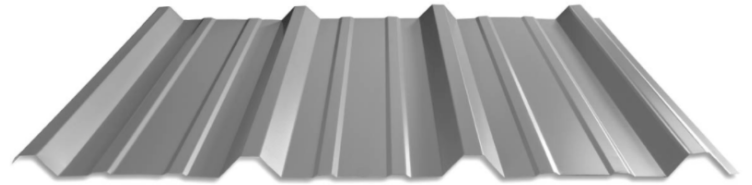


Roof Profile



Wall Profile

**reverse rolled shown*



GR-7™

KEY FEATURES

29, 26, 24 & 22 Tru-Gauge™ and .032" Aluminum and Rusteel Plus™

3:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 45' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application


Perforated options available (please inquire)

Fiberglass & Polycarbonate panels available to match profile

Manufactured in Salem OR

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM E455-19

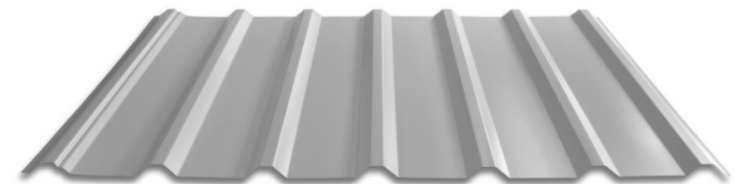

Marion “R” Panel™

KEY FEATURES

26, 24 & 22 Tru-Gauge™ and .032” Aluminum

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1’ to 45’ — for longer lengths please inquire

Long length flashings available up to 20’11”

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application


Perforated options available (please inquire)

Fiberglass & Polycarbonate panels available to match profile


Manufactured in Salem OR and Riverside CA

OverEZee™ retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

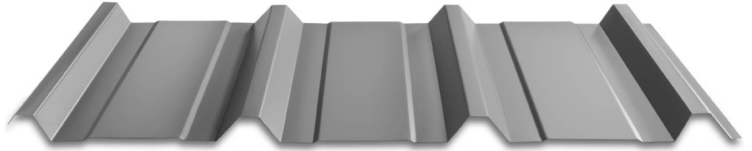


Roof Profile



Wall Profile

**reverse rolled shown*



Classic 7/8” Corrugated™

KEY FEATURES

26, 24 & 22 Tru-Gauge™ and .032” & .040” Aluminum

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1’ to 45’ — for longer lengths please inquire

Long length flashings available up to 20’11”

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws


Roof and Vertical or Horizontal Wall application

Fiberglass & Polycarbonate panels available to match profile


Manufactured in Salem OR, Riverside CA and Spokane WA

OverEZee™ Retro-fit systems available


ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

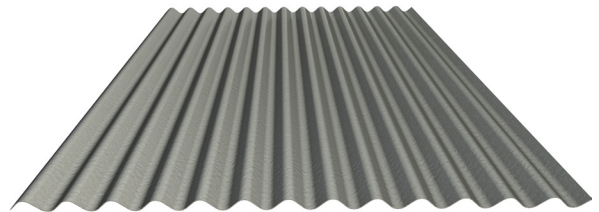

Salem and Spokane profile



Riverside profile



Max Corr™

KEY FEATURES

29, 26, 24 & 22 Tru-Gauge™ and .032" & .040" Aluminum

22ga Rusteel Plus™ (A606)

3:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 30' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application

Perforated options available (please inquire)

Fiberglass panels available to match profile

Manufactured in Salem OR

OverEZee™ retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

2-1/2" Corrugated

KEY FEATURES

29 and 26 Tru-Gauge™

3:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 30' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application





Perforated options available (please inquire)

Fiberglass panels available to match profile

Manufactured in Salem OR

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

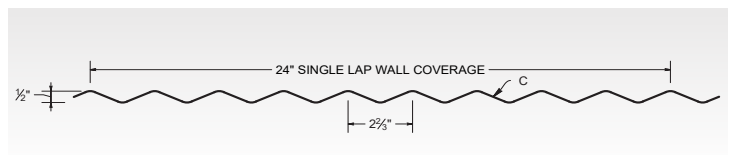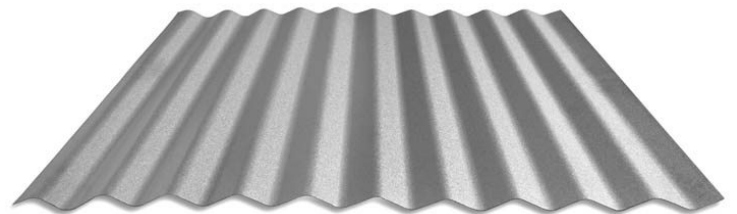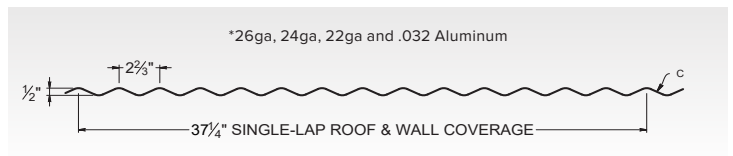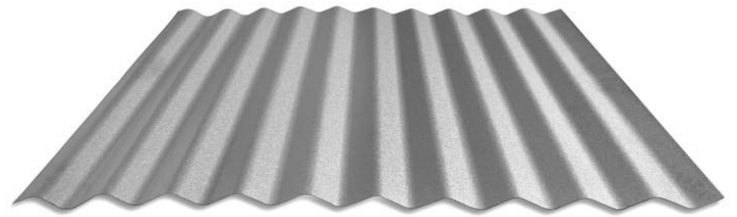

HR-34™

KEY FEATURES

26, 24 & 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 1' to 45' — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws


Roof and Vertical or Horizontal Wall application

Structural panel that will span up to 6'


Manufactured in Salem OR and Riverside CA

OverEZee™ retro-fit systems available


ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

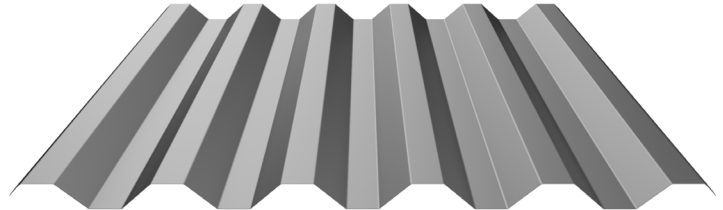

Roof Profile



Wall Profile



TR-7.2

KEY FEATURES

24 & 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 3' to 20'10" — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws



Roof and Vertical or Horizontal Wall application

Structural panel that will span up to 6'

Manufactured in Salem OR

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

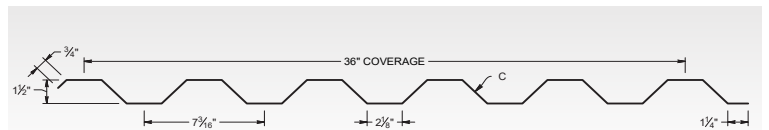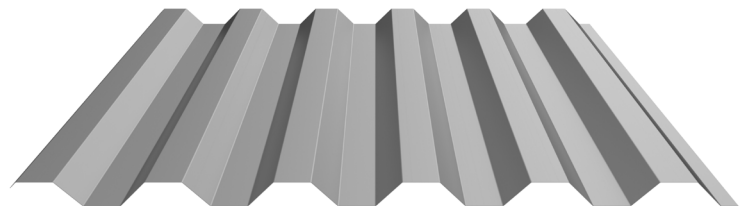

BR-36

KEY FEATURES

24 & 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 3' to 20'10" — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application

Perforated options available (please inquire)

Structural panel that will span up to 5'

Manufactured in Salem OR and Riverside CA

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

4.0 Rib

KEY FEATURES

24 & 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 4' to 20'10" — for longer lengths please inquire

Long length flashings available up to 20'11"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws


Roof and Vertical or Horizontal Wall application

Structural panel that will span up to 5'


Manufactured in Salem OR, Sacramento CA and Riverside CA

OverEZee™ Retro-fit systems available




ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

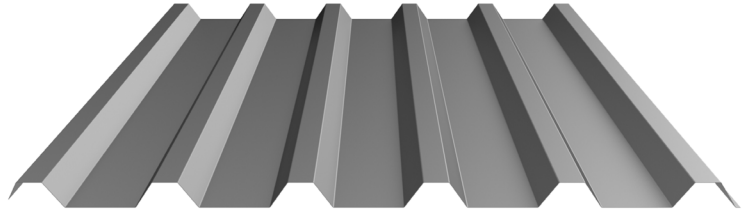

Roof Profile




Wall Profile

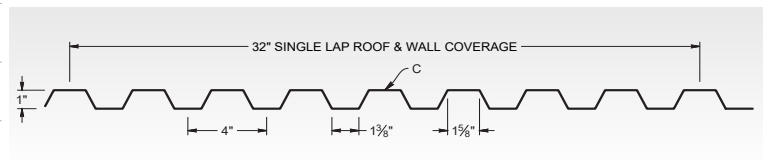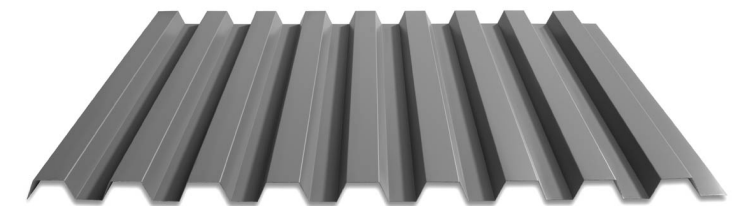


Classic V-Rib™

KEY FEATURES

- 24 & 22 Tru-Gauge™ and .032" Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 3' to 20'10" — for longer lengths please inquire
- Long length flashings available up to 20'11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Structural panel that will span up to 6'
- Manufactured in Salem OR and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

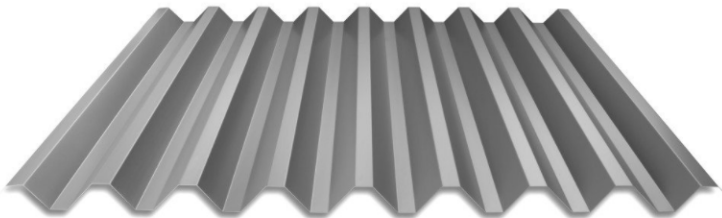



Roof Profile



Wall Profile




TMP recommends the following fasteners:


FASTENER	DESCRIPTION	USE	FASTENER	DESCRIPTION	USE
	Woodfast Screw #10 x 1", 1-1/2" 1/4" Hex Head Color Matched	#10 Woodfast screws are used to attach panel to dimensional lumber.		Tek Screw #12 x 1", 1-1/2" 5/16" Hex Head	Tek Screws are used for attaching panels to metal purlins.
	Woodfast Screw #14 x 1", 1-1/2" 5/16" Hex Head Color Matched	#14 Woodfast screws are used to attach panel to plywood/OSB.		Tek Screw #14 x 7/8" 5/16" Hex Head	Tek Screws are used for attaching panels to metal purlins.
	Stitch Screw #12 x 3/4" 1/4" Hex Head Color Matched	Stitch Screws are used to attach metal to metal such as lap joints, trim to trim, trim to panel and side lap attachment. They can be used interchangeably with rivets.		Rivets #43 (1/8" x 1/8") Stainless Steel rivet Color Matched or non-painted.	Rivets are used to attach metal to metal such as lap joints, trim to trim, trim to panel and side lap attachment.

Vertical Series


TMP 10-ALPHA




TMP 10-BETA




TMP 10-CHARLIE




TMP 10-DELTA




TMP 10-ECHO




TMP .75-4-32



TMP .75-6-36



TMP .625-4.5-36



KEY FEATURES of Vertical Series

24 and 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)

3:12 minimum pitch if seam height < 1" recommended when installed with butyl sealant

1:12 minimum pitch if seam height ≥ 1" recommended when installed with butyl sealant

Custom lengths 2' to 20'10"

Standard trim, custom trim and accessory packages available


Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application


Manufactured in Salem OR, Sacramento CA and Riverside CA

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

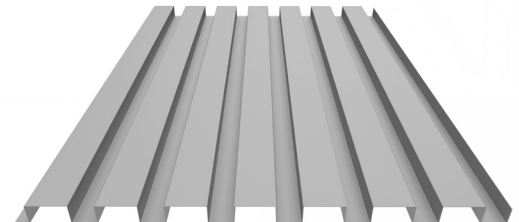


TMP 10-ALPHA

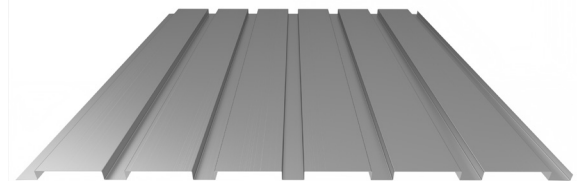


TMP .75-6-36

Cladding Series

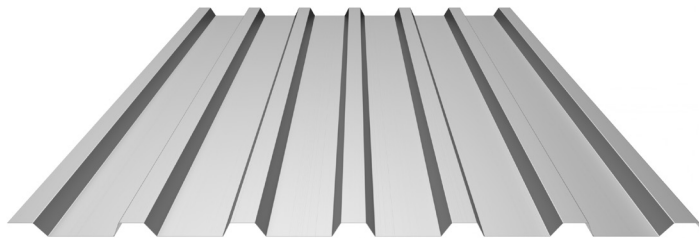

TMP 1-6-36

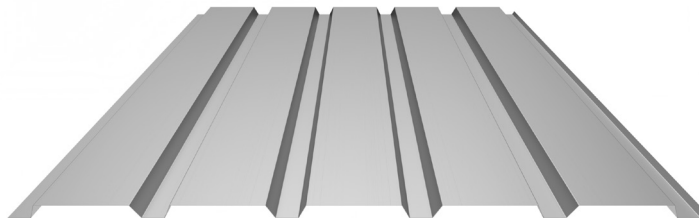

TMP 1-8-40

KEY FEATURES

of Cladding Series

24 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum
(please inquire)

3:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 2' to 20'10"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application

Manufactured in Salem OR, Sacramento CA and Riverside CA

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E331, ASTM E283,
ASTM A653/A924, ASTM A792, ASTM B209


TMP 1-6-36

Roof




TMP 1-6-36

Wall




TMP 1-8-40

Roof



TMP 1-8-40

Wall



TMP .625-7.33-44

Roof




TMP .625-7.33-44


Wall



Long Span Series

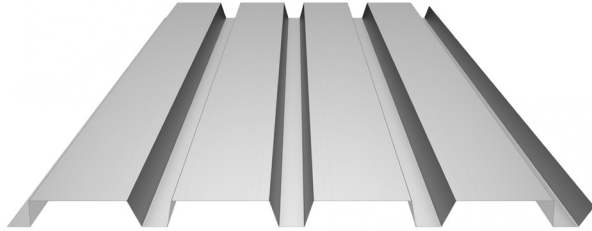


TMP 2-8-32

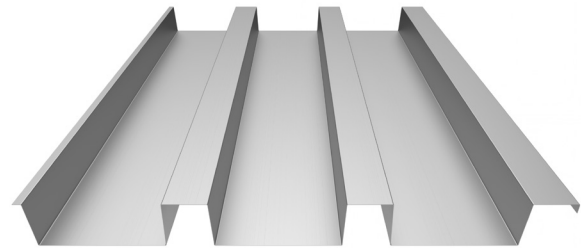

TMP 3-10-30


TMP 2-6-30

Roof




TMP 2-6-30

Wall




TMP 2-8-32

Roof




TMP 2-8-32

Wall




TMP 3-6-24

Roof




TMP 3-6-24

Wall




TMP 3-8-24

Roof




TMP 3-8-24

Wall




TMP 3-10-30

Roof



TMP 3-10-30

Wall



KEY FEATURES

of Long Span Series

24 and 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum
(please inquire)

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 2' to 20'10"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws


Roof and Vertical or Horizontal Wall application

Manufactured in Salem OR, Sacramento CA and Riverside CA


OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331,
ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

Deep Rib Series

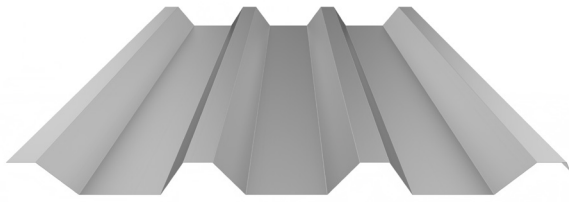

TMP 3-12-36

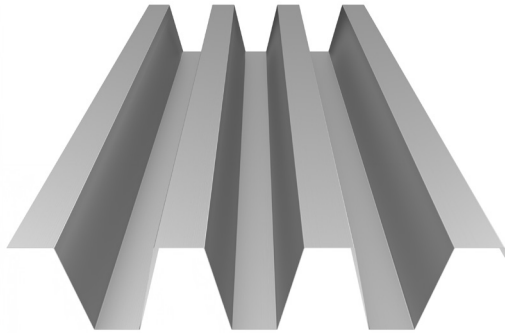

TMP 4.5-6-18

KEY FEATURES

of Deep Rib Series

24 and 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum
(please inquire)

1:12 minimum pitch recommended when installed with butyl sealant

Custom lengths 2' to 20'10"

Standard trim, custom trim and accessory packages available

Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application


Manufactured in Salem OR, Sacramento CA and Riverside CA

OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331,
ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209


TMP 3.5-10-30

Roof




TMP 3.5-10.30

Wall




TMP 3-12-36

Roof




TMP 3-12-36

Wall




TMP 4.5-6-18

Roof

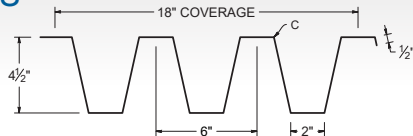


TMP 4.5-6-18

Wall




TMP 4-10-30

Roof




TMP 4-10-30

Wall




TMP 4-12-24

Roof




TMP 4-12-24

Wall

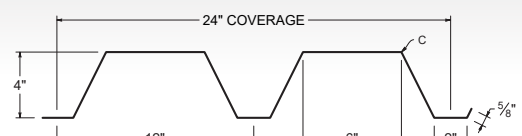


Ribbed Series


TMP 1.5-4.875-34




TMP 1.5-6-36




TMP 1.5-8-32




TMP 1.5-7.8-39





TMP 1.5-9-36



TMP 1.75-5.33-32



TMP 1.75-9-36

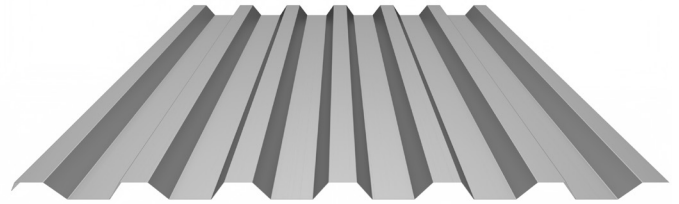

TMP 1.5-6-36

KEY FEATURES of Ribbed Series

24 and 22 Tru-Gauge™ and .032" Aluminum

Custom 20 & 18 Tru-Gauge™ and .040" Aluminum
(please inquire)

3:12 minimum pitch if seam height < 1" recommended when
installed with butyl sealant

1:12 minimum pitch if seam height ≥ 1" recommended when
installed with butyl sealant

Custom lengths 2' to 20'10"

Standard trim, custom trim and accessory packages available


Color matched neoprene washered screws

Roof and Vertical or Horizontal Wall application

Manufactured in Salem OR, Sacramento CA and Riverside CA


OverEZee™ Retro-fit systems available

ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331,
ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

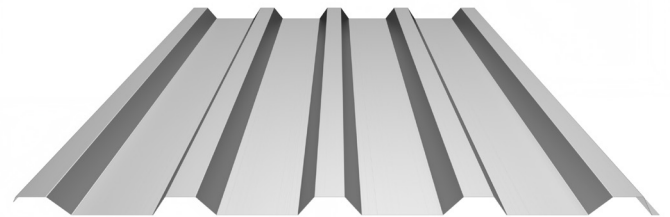


TMP 1.5-8-32


Standard Kynar 500® PVDF Resin

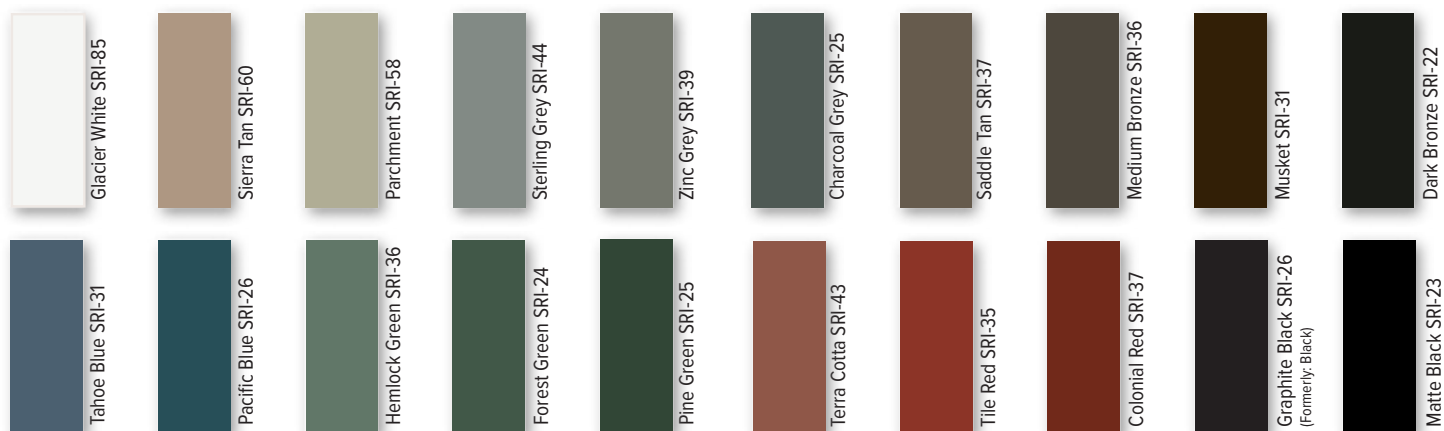

PREMIUM METALLIC COOL KYNAR 500® COLORS

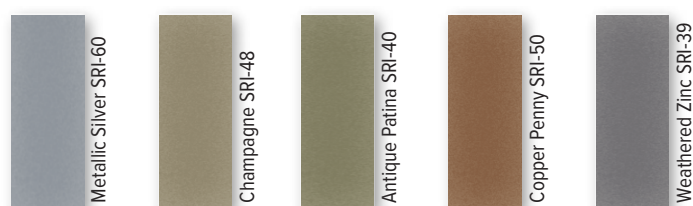


SPECIALIZED MATERIAL

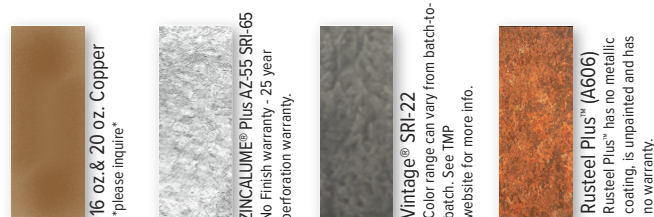

PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar (PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

Standard ArmorTech™ Coatings

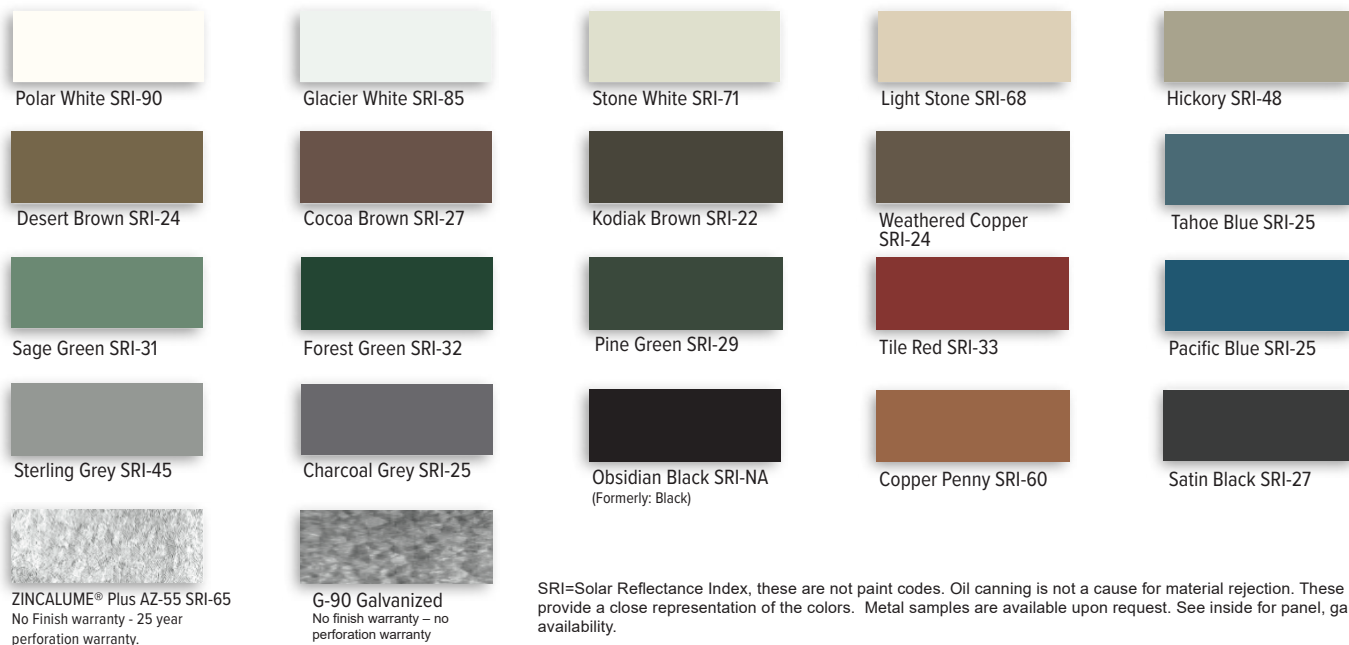

SRI=Solar Reflectance Index, these are not paint codes. Oil canning is not a cause for material rejection. These printed chips provide a close representation of the colors. Metal samples are available upon request. See inside for panel, gauge & color availability.



RIVERSIDE CA | SACRAMENTO CA | SALEM OR | AUBURN WA | SPOKANE WA

WWW.TAYLORMETAL.COM

Other Taylor Metal companies:



ROLLED STEEL PRODUCTS
a Taylor Metal Company

In partnership with:

