Exposed Fastener Collection

ROOF AND WALL PANELS



TAYLOR METAL PRODUCTS

RIVERSIDE CA | SACRAMENTO CA | SALEM OR | AUBURN WA | SPOKANE WA

Table of Contents



ROOF AND WALL PANELS

3 Tuff Rib & T-3™
4 PBR & GR-7™
5 Marion “R” Panel™ & Classic 7/8” Corrugated™
6 Max Corr™ & 2-1/2” Corrugated
7 HR-34™ & TR-7.2
8 BR-36 & 4.0 Rib
9 Classic V-Rib™
10 Vertical Panel Series
11 Cladding Series
12 Long Span Series
13 Deep Rib Series
14 Ribbed Series

ADDITIONAL INFORMATION


9 Fasteners
15 Standard Color Finishes


Tuff Rib

KEY FEATURES

- 29 & 26 Tru-Gauge™
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR and Riverside CA
- ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM E455-19, UL Fire/Impact Rating



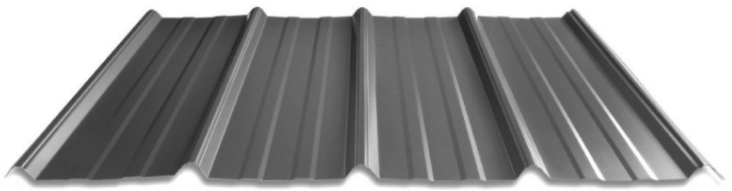

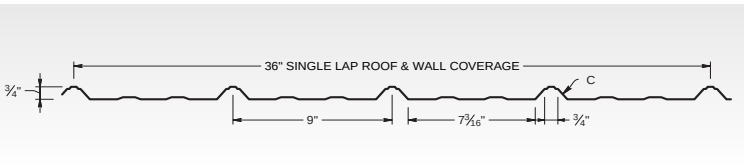


T-3™

KEY FEATURES

- 29, 26, 24 & 22 Tru-Gauge™ and .032” Aluminum and Rusteel Plus™
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM E455-19, UL Fire/Impact Rating



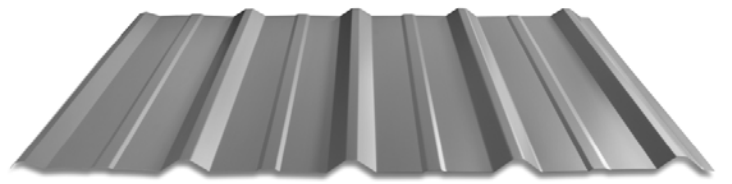

Roof & Wall Profile



Optional Wall Profile




PBR


KEY FEATURES

- 26, 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR, Spokane WA and Riverside CA
- OverEZee™ retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209, ASTM E455-19, UL-580, UL Fire/Impact Rating



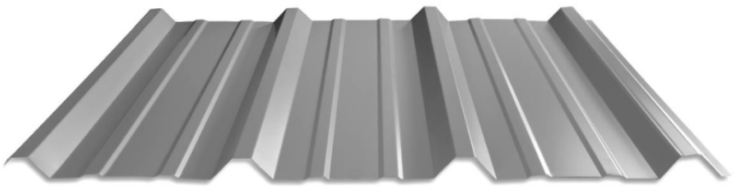


Roof Profile



Wall Profile

**reverse rolled shown*





GR-7™

KEY FEATURES

- 29, 26, 24 & 22 Tru-Gauge™ and .032” Aluminum and Rusteel Plus™
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM E455-19, UL Fire/Impact Rating



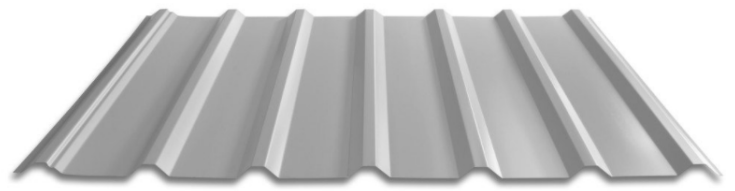

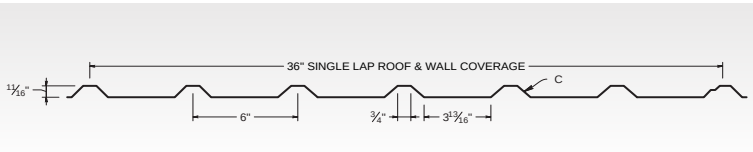


Marion “R” Panel™


KEY FEATURES

- 26, 24 & 22 Tru-Gauge™ and .032” Aluminum
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Custom 18 & 20 ga. and .040”, .050” & .063” Aluminum (please inquire)
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR
- OverEZee™ retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, UL-580, UL Fire/Impact Rating




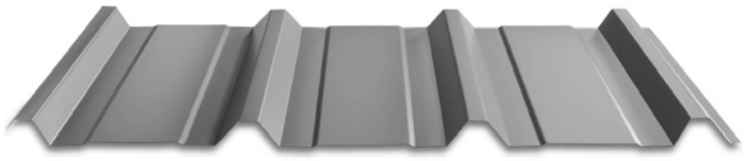

Roof Profile



Wall Profile
**reverse rolled shown*



Classic 7/8” Corrugated™


KEY FEATURES

- 26, 24 & 22 Tru-Gauge™ and .032” & .040” Aluminum
- Custom 18 & 20 ga. and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Salem OR, Riverside CA and Spokane WA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209, UL-580, UL Fire/Impact Rating






Salem and Spokane profile




Riverside profile





Max Corr™

KEY FEATURES

- 29, 26, 24 & 22 Tru-Gauge™ and .032” & .040” Aluminum
- Custom 18 & 20 ga. and .040”, .050” & .063” Aluminum (please inquire)
- 22ga Rusteel Plus™ (A606)
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 31’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass panels available to match profile
- Manufactured in Salem OR
- OverEZee™ retro-fit systems available
- ASTM E1592, ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, UL Fire/Impact Rating

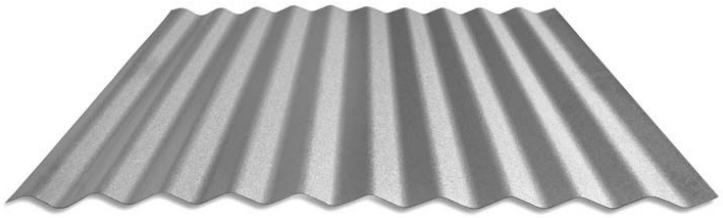

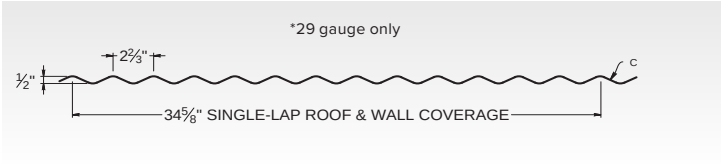


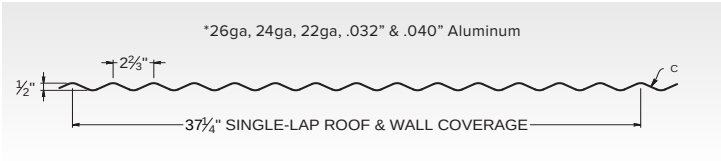


2-1/2” Corrugated

KEY FEATURES

- 29 & 26 Tru-Gauge™
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 31’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass panels available to match profile
- Manufactured in Salem OR
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

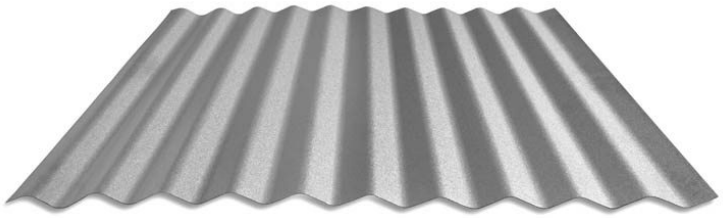

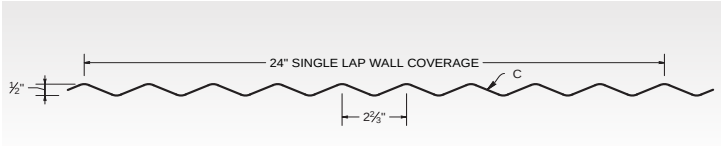


HR-34™


KEY FEATURES

- 26, 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™, .040”, .050” & .063” Aluminum (please inquire, 18 ga brake formed only)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Structural panel that will span up to 6’
- Manufactured in Salem OR and Spokane WA
- OverEZee™ retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209, UL-580, UL Fire/Impact




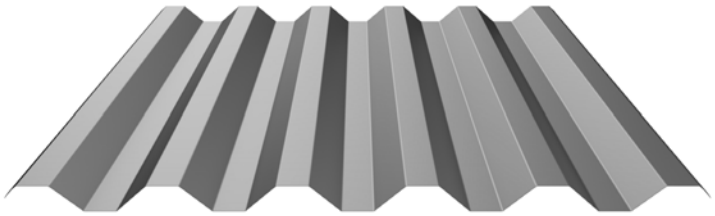

Roof Profile




Wall Profile




TR-7.2

KEY FEATURES

- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™, .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 3’ to 20’10” — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Structural panel that will span up to 6’
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209, UL Fire/Impact Rating

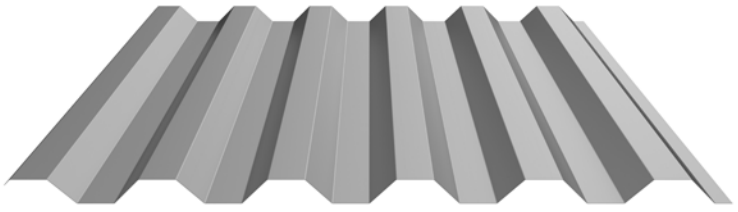

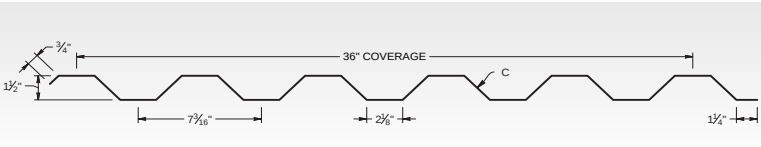


BR-36


KEY FEATURES

- 24 & 22 Tru-Gauge™ and .032” & .040” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 3’ to 20’10” — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Structural panel that will span up to 5’
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209, UL-580, UL Fire/Impact Rating




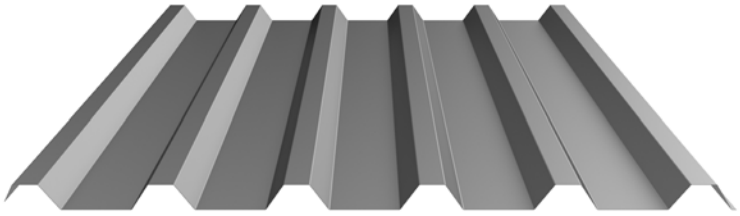


Roof Profile



Wall Profile A




Wall Profile B




4.0 Rib

KEY FEATURES

- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050”& .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 4’ to 20’10” — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Structural panel that will span up to 5’
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1592, ASTM E1680, ASTM E1646, ASTM E330, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

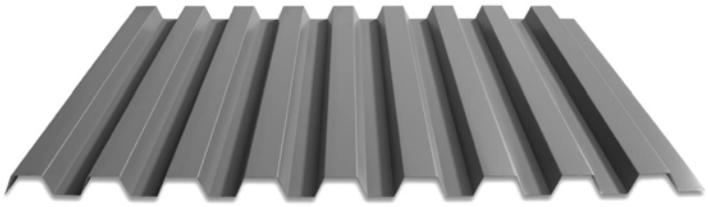


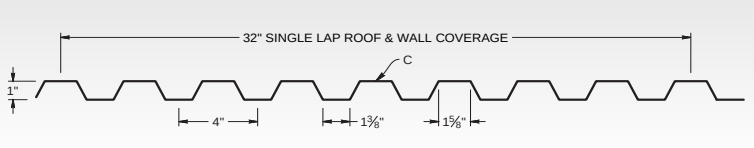

Classic V-Rib™

KEY FEATURES


- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 3’ to 20’10” — for longer lengths please inquire
- Long length flashings available up to 20’11” (for longer length flashings, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Structural panel that will span up to 6’
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792

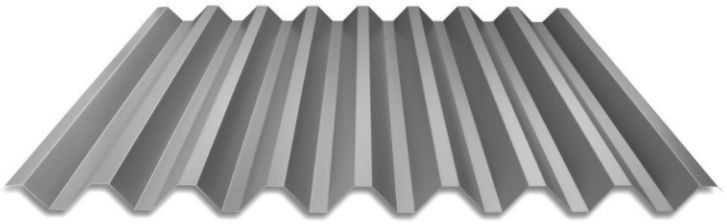

Roof Profile




Wall Profile




TMP recommends the following fasteners:

FASTENER	DESCRIPTION	USE
	**Woodfast Screw** #10 x 1", 1-1/2" 1/4" Hex Head Color Matched	#10 Woodfast screws are used to attach panel to dimensional lumber.
	**Woodfast Screw** #14 x 1", 1-1/2" 5/16" Hex Head Color Matched	#14 Woodfast screws are used to attach panel to plywood/OSB.
	**Stitch Screw** #12 x 3/4" 1/4" Hex Head Color Matched	Stitch Screws are used to attach metal to metal such as lap joints, trim to trim, trim to panel and side lap attachment. They can be used interchangeably with rivets.


FASTENER	DESCRIPTION	USE
	**Tek Screw** #12 x 1", 1-1/2" 5/16" Hex Head	Tek Screws are used for attaching panels to metal purlins.
	**Tek Screw** #14 x 7/8" 5/16" Hex Head	Tek Screws are used for attaching panels to metal purlins.
	**Rivets** #43 (1/8" x 1/8") Stainless Steel rivet Color Matched or non-painted.	Rivets are used to attach metal to metal such as lap joints, trim to trim, trim to panel and side lap attachment.

Vertical Series


TMP 10-ALPHA




TMP 10-BETA




TMP 10-CHARLIE




TMP 10-DELTA




TMP 10-ECHO




TMP .75-4-32



TMP .75-6-36




TMP .625-4.5-36




KEY FEATURES

of Vertical Series

- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050” & .063” Aluminum (please inquire)
- 3:12 minimum pitch if seam height < 1” recommended when installed with butyl sealant
- 1:12 minimum pitch if seam height ≥ 1” recommended when installed with butyl sealant
- Custom lengths 2’ to 20’10” (for longer lengths, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

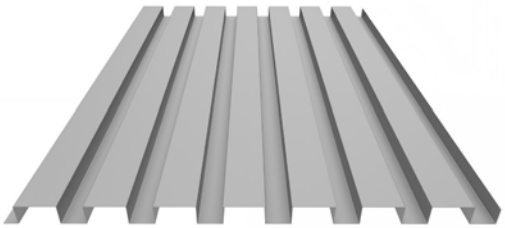


TMP 10-ALPHA

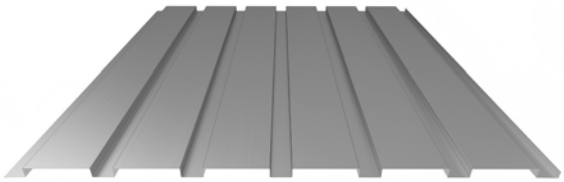


TMP .75-6-36

Cladding Series

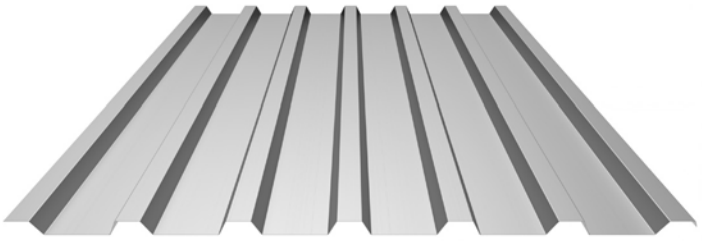

TMP 1-6-36

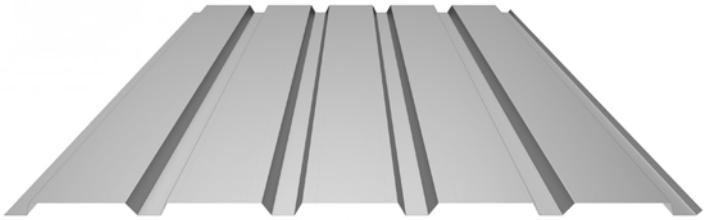


TMP 1-8-40

KEY FEATURES


of Cladding Series

- 24 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 2’ to 20’10” (for longer lengths, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E331, ASTM E283, ASTM A653/,A924, ASTM A792, ASTM B209


TMP 1-6-36
Roof




TMP 1-6-36
Wall



TMP 1-8-40 ASTM E1592
Roof



TMP 1-8-40 ASTM E1592
Wall



TMP .625-7.33-44
Roof




TMP .625-7.33-44
Wall




TAYLOR METAL PRODUCTS

Long Span Series

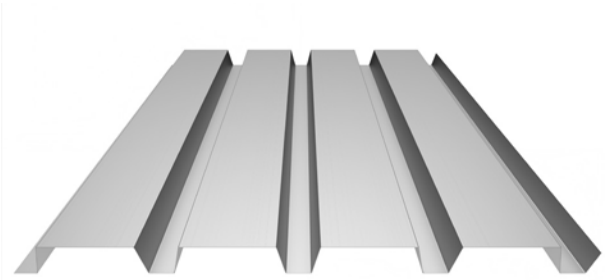

TMP 2-8-32

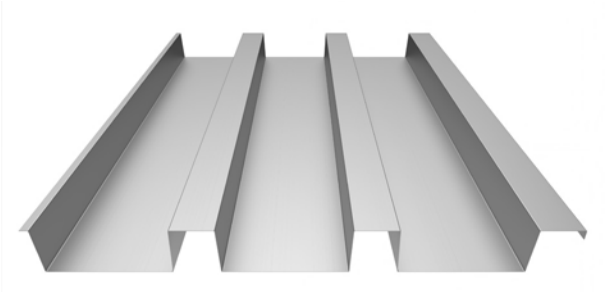


TMP 3-10-30


KEY FEATURES
of Long Span Series

- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 2’ to 20’10” (for longer lengths, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209


TMP 2-6-30
Roof

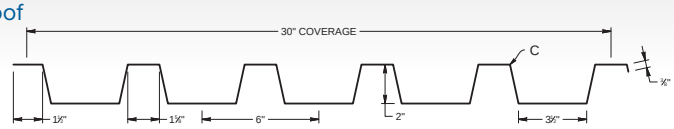


TMP 2-6-30
Wall

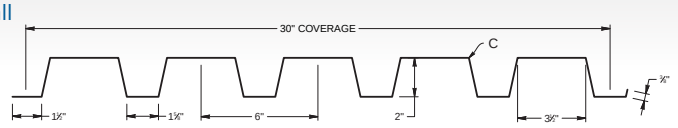


TMP 2-8-32
Roof




TMP 2-8-32
Wall




TMP 3-6-24
Roof




TMP 3-6-24
Wall




TMP 3-8-24
Roof




TMP 3-8-24
Wall




TMP 3-10-30
Roof




TMP 3-10-30
Wall



Deep Rib Series

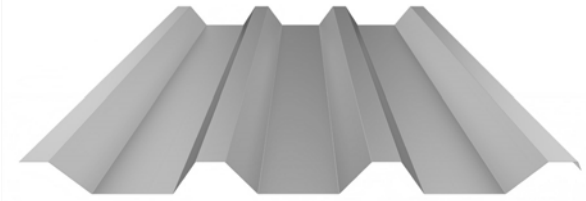

TMP 3-12-36

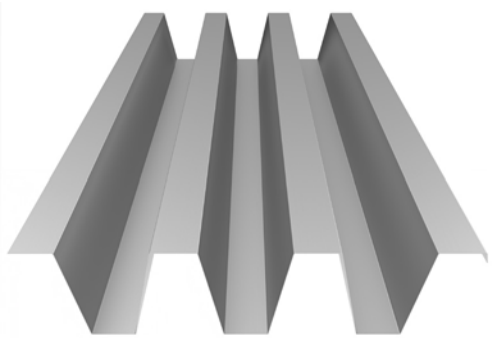


TMP 4.5-6-18


KEY FEATURES
of Deep Rib Series

- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 2’ to 20’10” (for longer lengths, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209


TMP 3-10-30
Roof




TMP 3-10.30
Wall




TMP 3.5-10-30
Roof




TMP 3.5-10.30
Wall




TMP 3-12-36
Roof

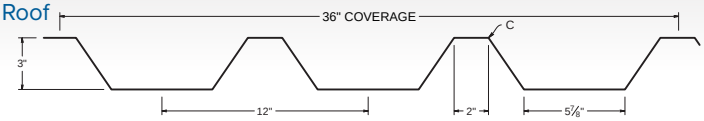


TMP 3-12-36
Wall

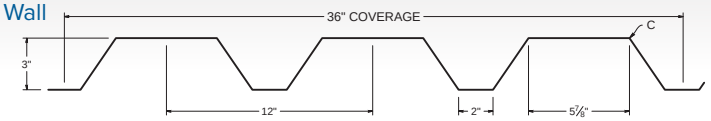


TMP 4.5-6-18 NO 1592
Roof

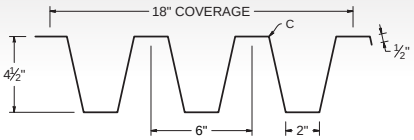


TMP 4.5-6-18
Wall

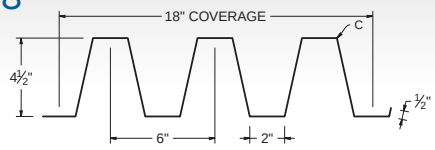


TMP 4-10-30 NO 1592
Roof




TMP 4-10-30
Wall



TMP 4-12-24 NO 1592
Roof

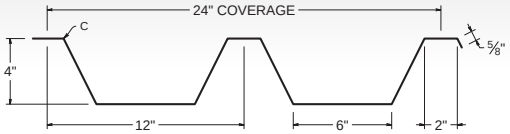


TMP 4-12-24
Wall

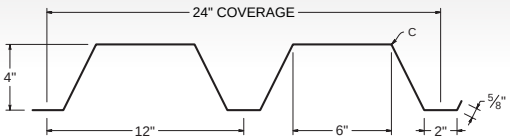


Ribbed Series


TMP 1.5-4.875-34




TMP 1.5-6-36




TMP 1.5-8-32




TMP 1.5-7.8-39




TMP 1.5-9-36




TMP 1.75-5.33-32 NO 1592



TMP 1.75-9-36 NO 1592



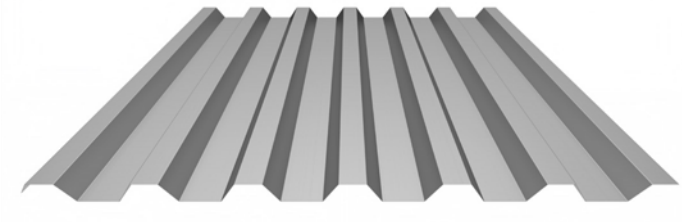


TMP 1.5-6-36

KEY FEATURES

of Ribbed Series

- 24 & 22 Tru-Gauge™ and .032” Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040”, .050” & .063” Aluminum (please inquire)
- 1:12 minimum pitch if seam height < 1” recommended when installed with butyl sealant
- 1:12 minimum pitch if seam height ≥ 1” recommended when installed with butyl sealant
- Custom lengths 2’ to 20’10” (for longer lengths, please inquire)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Manufactured in Salem OR, Sacramento CA and Riverside CA
- OverEZee™ Retro-fit systems available
- ASTM E1680, ASTM E1646, ASTM E1592, ASTM E331, ASTM E283, ASTM A653/A924, ASTM A792, ASTM B209

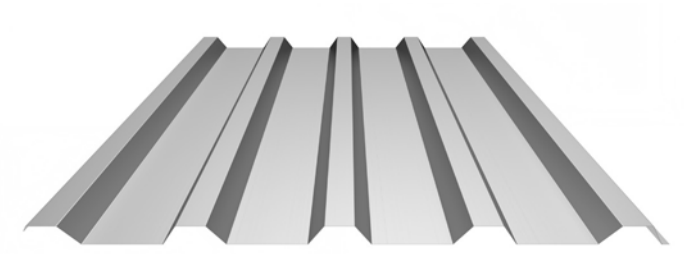

TMP 1.5-8-32

Standard Kynar 500® PVDF Resin

RESIDENTIAL LIMITED LIFETIME WARRANTY / 40 YEAR COMMERCIAL MANUFACTURER'S LIMITED WARRANTY

- Glacier White SRI-85
- Sierra Tan SRI-60
- Parchment SRI-58
- Sterling Grey SRI-44
- Zinc Grey SRI-39
- Charcoal Grey SRI-25
- Saddle Tan SRI-37
- Medium Bronze SRI-36
- Musket SRI-31
- Dark Bronze SRI-22
- Tahoe Blue SRI-31
- Pacific Blue SRI-26
- Hemlock Green SRI-36
- Forest Green SRI-24
- Pine Green SRI-25
- Terra Cotta SRI-43
- Tile Red SRI-35
- Colonial Red SRI-37
- Graphite Black SRI-26 (Formerly: Black)
- Matte Black SRI-23

PREMIUM METALLIC COOL KYNAR 500® COLORS

- Metallic Silver SRI-60
- Champagne SRI-48
- Antique Patina SRI-40
- Copper Penny SRI-50
- Weathered Zinc SRI-39

SPECIALIZED MATERIAL

- 16 oz.& 20 oz. Copper *please inquire*
- ZINCALUME® Plus AZ-55 SRI-65 No Finish warranty - 25 year perforation warranty.
- Vintage® SRI-22 Color range can vary from batch-to-batch. See TMP website for more info.
- Rusteel Plus™ (A606) Rusteel Plus™ has no metallic coating, is unpainted and has no warranty.

PVDF is a fluropolymer that is manufactured under the trademarked names Kynar 500® and Duranar (PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

Standard ArmorTech™ Coatings

40 YEAR RESIDENTIAL WARRANTY / 40 YEAR COMMERCIAL MANUFACTURER'S LIMITED WARRANTY

- Polar White SRI-90
- Glacier White SRI-85
- Stone White SRI-71
- Light Stone SRI-68
- Hickory SRI-48
- Desert Brown SRI-24
- Cocoa Brown SRI-27
- Kodiak Brown SRI-22
- Weathered Copper SRI-24
- Tahoe Blue SRI-25
- Sage Green SRI-31
- Forest Green SRI-32
- Pine Green SRI-29
- Tile Red SRI-33
- Pacific Blue SRI-25
- Sterling Grey SRI-45
- Charcoal Grey SRI-25
- Obsidian Black SRI-NA (Formerly: Black)
- Copper Penny SRI-60
- Satin Black SRI-27
- ZINCALUME® Plus AZ-55 SRI-65 No Finish warranty - 25 year perforation warranty.
- G-90 Galvanized No finish warranty – no perforation warranty

SRI=Solar Reflectance Index, these are not paint codes. Oil canning is not a cause for material rejection. These printed chips provide a close representation of the colors. Metal samples are available upon request. See inside for panel, gauge & color availability.

TAYLOR METAL PRODUCTS

TAYLOR METAL PRODUCTS

RIVERSIDE CA | SACRAMENTO CA | SALEM OR | AUBURN WA | SPOKANE WA

WWW.TAYLORMETAL.COM

For all available panels, options and further information, please visit www.taylormetal.com

Other Taylor Metal companies:

CHAMPION METAL *a Taylor Metal Company*

RSP ROLLED STEEL PRODUCTS *a Taylor Metal Company*

In partnership with:

steelscape

PPG

ENERGY STAR

CRRC MEMBER

November 2026