
TAYLOR METAL PRODUCTS


Lifetime Soffit™
Flush Seam Series
Wall and Soffit

PANEL PROFILES

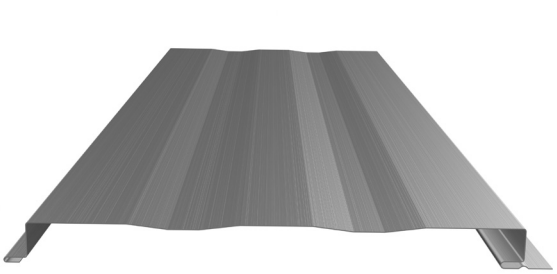

Now Available: STRIATIONS

Striations offer the best solution to help minimize oil canning

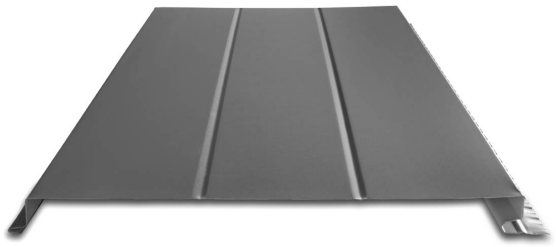

DOUBLE V-GROOVE (shown)

or Single V-Groove available



FLAT PAN



VENTED PANELS

KEY FEATURES

- 12" coverage option
- 24 & 22 gauge Tru-gauge™ and .032 & .040 Aluminum
- Substrate: ASTM A653 / A792
- Aluminum recommended within 1000 ft of salt water (*not required*)
- Custom Lengths 3' to 35'
  (Inquire for longer or shorter lengths)
- For panels over 14 ft. in length, please inquire with a TMP Representative. Consider thermal movement, points of attachment, and substrate. Longer panel lengths are more difficult to install as they can change shape, cause distortion (“oil canning”), and are vulnerable to “folding” or other damage.
- 2' Shortcut capability *(Fee applicable)*
- Concealed Fasteners: fasteners cannot leak
- 6.16 sq. inch (4.2%) free air flow per lineal foot of perforated panel
- Versatile in wall and soffit applications
- Panels being installed on open frame building, inquire
- Panel options: Vented, Striations, Single V-Groove, Double V-Groove, and Flat Pan

TESTING

- ASTM E1592 - Structural uniform static air pressure
- ASTM E283 - Air Infiltration (Wall)
- ASTM E331 - Water Infiltration (Wall)
- ASTM E2886 - Ember Penetration (Vented Soffit)



Lifetime Soffit™ will give your commercial or residential projects a clean monolithic appearance. These panels are a perfect fit to be used on walls, soffits and fascia. With the different panel styles available, your designs will come alive.


TAYLOR METAL PRODUCTS

MATERIAL SPECIFICATIONS

- 24 & 22 Tru-Gauge™ Kynar 500® (PVDF) Painted Steel G-90 Galvanized or AZ-50 ZINCALUME®
- ✦.032" & .040" Kynar 500® (PVDF) Painted aluminum
- 24 & 22 Tru-Gauge™ bare ZINCALUME® Plus AZ-55 *(No finish warranty – 25 yr. perforation warranty)*
- 24 Tru-Gauge™ Bonderized
- 22 Tru-Gauge™ Rusteel Plus™ (A606)
- Custom 20 & 18 Tru-Gauge™ and .050" & .063" aluminum (*please inquire*)
- 16 & 20 oz. Copper (*Inquire for availability & price*)
- Kynar 500® (PVDF) and substrate testing data available (See website)
- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar®(PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.


FINISHES

- Limited Lifetime residential paint warranty
- 40 year commercial paint warranty
- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Materials
- Kynar 500® (PVDF) Paint System - the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- "Oil Canning" is an inherent characteristics of roof and wall products, and not a defect, which is not a cause for panel rejection.

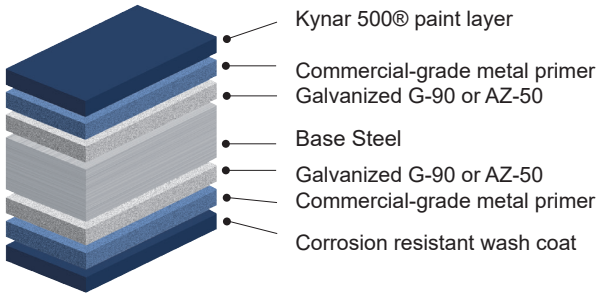


STANDARD COOL KYNAR 500® COLORS


▲22 Tru-Gauge™ ✦.032 Aluminum

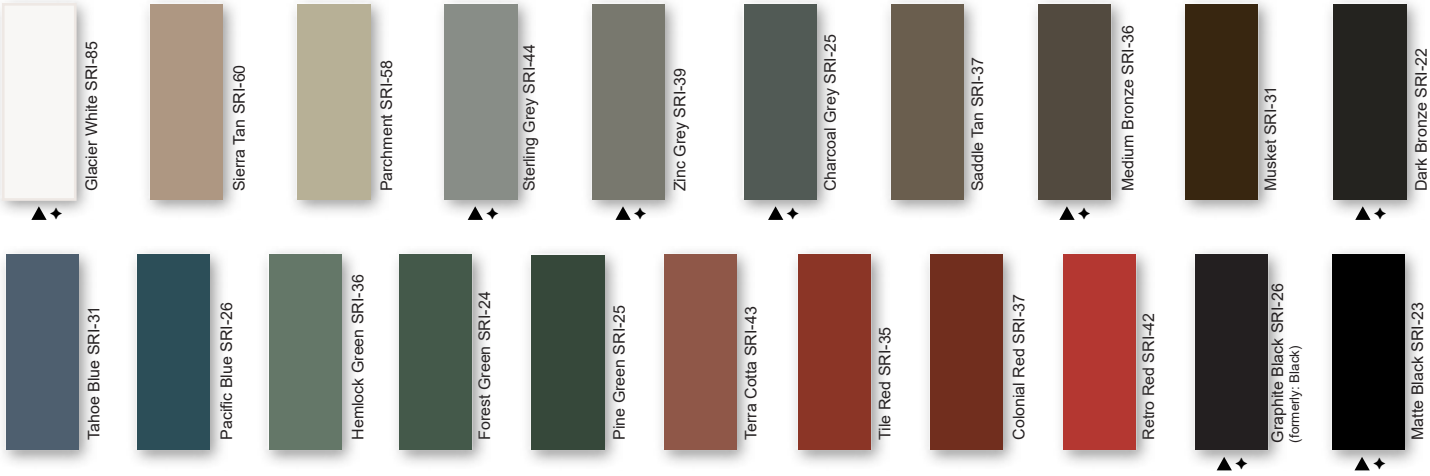

PREMIUM METALLIC COOL KYNAR® COLORS

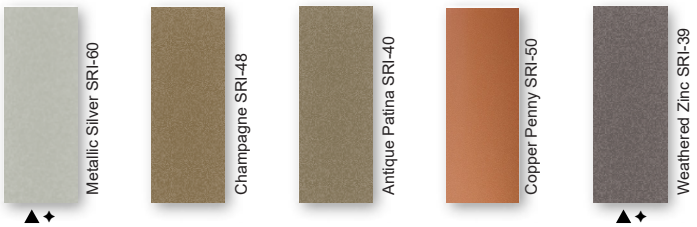

SPECIALIZED MATERIAL

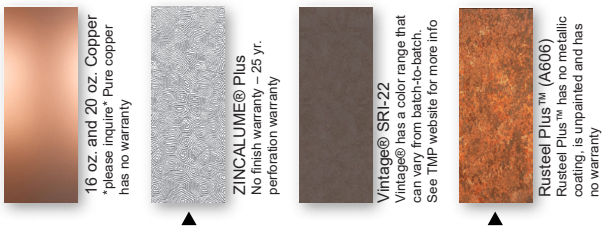

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
*SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.***Oil canning is not a cause for material rejection****

steelscape PPG ENERGY STAR CRRC MEMBER

Rev. Date 10-26