





ICC
EVALUATION
SERVICE®

ICC-ES EVALUATION REPORT #5045 with CBC-CRC Supplement

CLIP ATTACHMENT

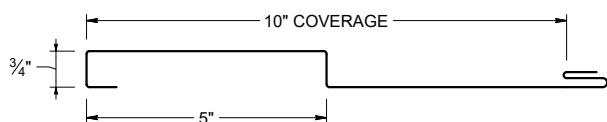


SCREW FLANGE ATTACHMENT


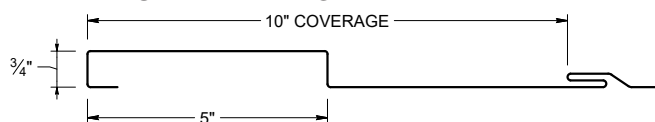


PANEL ATTACHMENT CLIP

STANDOFF CLIP



STANDARD CLIP

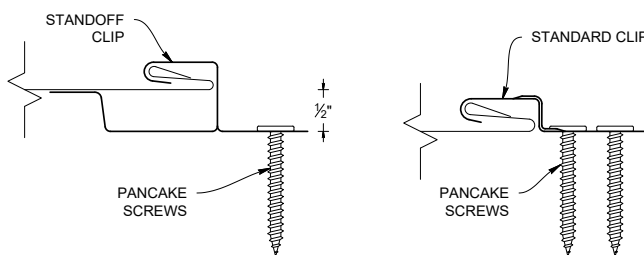

KEY FEATURES

- Manufactured in Salem, OR, Sacramento, CA and Riverside, CA
- 10" panel coverage
- 3/4" rib height
- 24 Tru-Gauge™ steel and .032" aluminum are standard and attached with high-performance concealed clips (some profiles *may* be available with an integrated screw flange option -- *please inquire*)
- Screw flange is not available in heavier gauges:
 - 22 Tru-Gauge™ steel and .040" aluminum
 - Custom 20 & 18 Tru-Gauge™ steel and .050" & .063" aluminum
- Aluminum recommended within 1000 ft of salt water (*not required*)
- 16 & 20 oz. Copper (*Inquire for availability & price*)
- 22 gauge Rusteel Plus™ (A606)
- 3' to 32'9" panel lengths (*Inquire for longer or shorter lengths*)
- Custom profiles available
- Vertical or horizontal wall application (Rain Screen)
- Acceptable for use as a soffit panel
- Interchangeable panel widths and configurations

TESTING

- ASTM A653/A924 - G-90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume® AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM D6578 - Anti-Graffiti
- ASTM E283 - Air infiltration (wall)
- ASTM E331 - Water infiltration (wall)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1680 - Air infiltration (roof)

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
12 PSF<0.01 CFM/ft²-PASS	20.5 PSF - Pass
Intertek Test Result L5460.01-901-44 R1	
Intertek Test Result L5461.01-901-44 R1	

WEIGHT CHART

ELV-55	WIDTH	24 GA STEEL	22 GA STEEL	.032 ALUM	.040 ALUM
THICKNESS		0.0236"	0.0285"	0.032"	0.040"
WEIGHT/LINFT	CLIP ATTACH	1.163 LBS	1.34 LBS	0.55 LBS	0.66 LBS
WEIGHT/LSQFT	CLIP ATTACH	1.40 LBS	1.613 LBS	0.66 LBS	0.79 LBS
WEIGHT/LINFT	SCREW FLANGE	1.309 LBS	1.702 LBS	0.62 LBS	0.835 LBS
WEIGHT/LSQFT	SCREW FLANGE	1.57 LBS	2.042 LBS	0.74 LBS	1.00 LBS

Rev. Date 08-26