


## Slim-Lock<sup>™</sup> Installation Guide



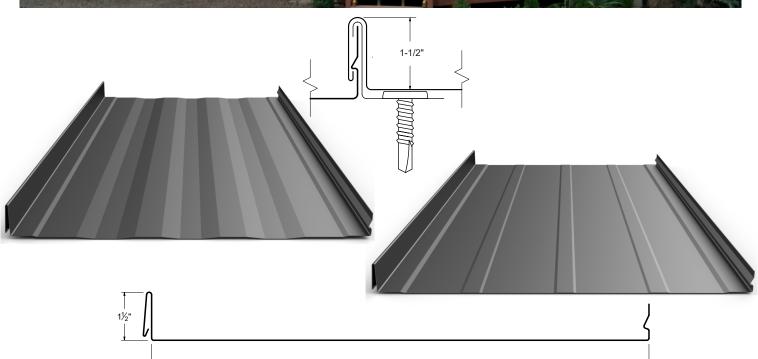


- 155/8" & 195/8" COVERAGES

# TAYLOR METAL PRODUCTS

### **Table of Contents**

Panel Specifications	4-5
Taylor Delivery Fleet	6
Delivery & Will Call/Loading	7
Notes to Designer/Installer	8-9
Handling/Storage & Safety	10
Standard Eave	11
Hook Eave	12
Gutter/Hook Eave	13
Standard Ridge	14
Vented Ridge	15
End Dam	16
Valley - High Pitch	17
Valley - Low Pitch	18
Box Gable	19
Alternate Gable	20


	Sidewall	21
	Peak Flashing (R.E.C)	22
	Pitch Change	23
_	Endwall	0.4
	Vented Endwall	25
	Curb Back Pan/Cricket	
	Curb Sidewall	29
	Curb Endwall	30
	Curb/Pan Cricket	31
	Eave to Gable Transition	32-34
	Pipe Penetration - On Plate	35
	Pipe Penetration - On Rib	36-37
	Pipe Penetration - On Pan	38
	Flashing Selection	39-42
	Order Form	43

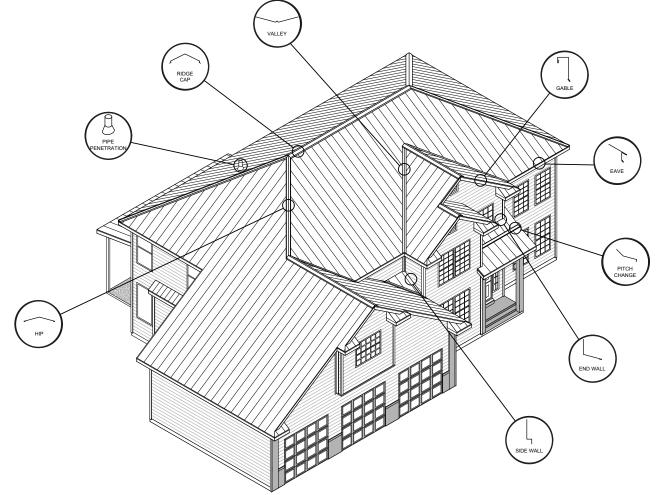




# Slim-Lock TM STANDING SEAM

#### **PANEL PROFILES**



**STRIATIONS** 



ACCENT RIBS
3 Accent ribs for 15-5/8" panel



The Slim-Lock™ Standing Seam delivers a panel with strong, clean, continuous grace, together with unequaled quality. This provides you a weathertight roof to last a lifetime. Clip systems allow for extremely long panels, without the need for laps.

#### **KEY FEATURES**

- Standard coverages: 15-5/8" & 19-5/8" (24ga. only) (For other widths, please inquire)
- Non Standard coverages/requires slitting: 11-7/8" & 12"
- 24 & 22 Tru-Gauge™ and .032" Aluminum
- 16 & 20 oz. Copper (Please inquire)
- Floating clip system: allows for expansion & contraction of panels in longer lengths
- 1-1/2" vertical rib
- Standard factory notched panels
- · Concealed fasteners: fasteners cannot leak
- 3:12 minimum pitch recommended (For lower pitches, please inquire)
- Standard panel lengths 4' to 60'
   Minimum length 3' Notched
   Minimum length 1' Not Notched
   (For longer panels, please inquire)
- 2' Shortcut capability (Fee applicable)
- Onsite roll forming available
- · Panel options: Striations, Accent Ribs, and Flat Pan
- · Manufactured in Salem, Oregon

#### **TESTING**



Code compliance UL Evaluation Report UL ER #25913-01

- UL Construction No. 589
   (Slim-Lock™ carries its UL Classifications under the Clip-Lock 150 (CA) profile designation)
- UL 580 Class 90 Wind Uplift
- UL 790 Class A (ASTM E108) Fire rated
- · UL 2218 Class 4 Impact (hail) rated
- ASTM A653/A924 G90 Galvanized
- ASTM A792 Zincalume/Galvalume AZ-50/55
- ASTM B209 Aluminum Substrate




#### **MATERIAL SPECIFICATIONS**

- 24 gauge Kynar 500® Painted Steel G-90 Galvanized or AZ-50
- 24 & 22 gauge bare Zincalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- ▲22 gauge Kynar 500® Painted Steel G-90 Galvanized or AZ-50
- + .032" Kynar 500® Painted Aluminum
- 16 and 20 ounce Copper (Please inquire)
- Kynar 500® and substrate testing data available (See website)
- "Oil Canning" is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection

#### **FINISHES**

- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Materials
- Kynar 500® Paint System the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- · Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- · 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications



#### STANDARD COOL KYNAR 500® COLORS



These printed chips provide a close representation of the colors.

1,2 ▲ ♦

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.\*\*\*Oil canning is not a cause for material rejection\*\*\*









### **Taylor Delivery Fleet**

# TAYLOR METAL PRODUCTS

#### **Delivery Fleet**

Taylor Metal Products prides itself with quick lead times delivered with our fleet of semi trucks. Our fleet of trucks are owned and operated by TMP. All of our drivers are Taylor Metal Products employees, so when your truck rolls in to deliver, you are dealing with Taylor Metal Products.

Expect consistant and exceptional service with short lead times. The inhouse fleet allows for efficient and cost-effective delivery.





Mounted on the rear of our semitrailer, the trailer-mounted "piggy-back" forklift will accompany you right to your place of use, opening up unprecedented possibilities in terms of transportation. It can travel sideways, carrying panels up to 40' long, allowing delivery in locations that would typically be considered impossible to reach.

Save time and effort while avoiding potential loading and transport issues; have experienced TMP personnel deliver and unload your order.





### **Delivery & Will Call/Loading**

#### **Delivery**

We will make every attempt to deliver material to the desired location. We may be unable to gain access on tight corners or steep terrain. If the site is deemed inaccessible by our driver, the customer may choose an alternate delivery site within a reasonable proximity. If we are unable to make the alternate delivery, additional charges may be assessed.

The customer is responsible for:

- Determining adequate access for delivery ahead of time.
- Meeting the delivery at the agreed upon time.
- Providing adequate resources
   (1-4 people as needed) for off loading materials.
- A charge of \$100 per hour may be added for deliveries that go beyond their allotted time
- Check the shipment at the time of delivery.
- Verify material quantities against the shipping/packing list.
- Note any damage or discrepancies upon the paper work at the time of delivery and notify Taylor Metal Products within 48 hours of delivery.

Delivery times are usually scheduled one day in advance. Taylor Metal Products will make every effort to make the delivery at the scheduled time. Please be aware that there may be conditions beyond our control such as traffic, mechanical failures, road closures, etc. which may affect our schedule.

#### Will Call/Loading

Flatbed trailers and trucks are best suited to transport metal roofing materials. These can be loaded from the side with a forklift and tied down in a safe and secure manner.

We are not able to load materials onto vehicles and/or trailers which are not suitable or may be hazardous to load. Please be aware that if we find a vehicle to be inappropriate, we reserve the right to refuse to load your order.

Unacceptable examples include: boat trailers, vans, buses, motor homes, campers and box trailers. Pickup racks which do not have sufficient supports for the weight or are not long enough to support bundles are also unacceptable.

Taylor Metal Products is not responsible to tie down loads nor do we provide any tie down materials. Please bring tie downs to secure your load (string or twine are **not** acceptable for this purpose).

Consider having your order delivered on one of our trucks with a piggy back forklift.



### **Notes to Designer / Installer**



#### Notes to Designer/Installer

**Taylor Metal Products** is providing the following details as an aid in design. The details in this guide are not inclusive to all design situations. The designer/installer is responsible for modifications and should take into consideration all aspects of the project including climate conditions, such as, snow and wind, as well as, building code requirements, building design, building usage and maintenance requirements.

Installation should be performed only by qualified installers familiar with metal roofing systems and industry standards. For details not shown in this guide, refer to the Sheet Metal and Air Conditioning Contractors National Association (SMACNA) architectural sheet metal manual for proper design. For manufacturer's weather tightness warranties – all details must be preapproved by Taylor Metal Products technical representative.

The Standard gauge for all products in this guide is 24 gauge and the standard finish is Kynar 500®. We recommend specifying all flashings be the same gauge, color, and finish as the panels to insure long-term durability and color match.

#### **Substrates**

Details in the manual are all shown over solid substrate. **Slim-Lock™** can be used over spaced purlins. For solid substrate, **Taylor Metal Products** recommends 5/8" plywood or metal decking.

#### <u>Underlayment</u>

For roofs with pitches below 3:12, High Temp Ice and Water shield underlayment must be installed across the entire surface (projects with manufacturer's weathertightness warranties require the TMP private label product). For pitches steeper than (or equal to) 3:12, High Temp Ice and Water is necessary at all perimeter locations, eave, ridge, valley, hips, sidewall, endwall, prow and penetrations. The remaining of the roof's field areas can then be covered with approved synthetic felt. If local codes or specifications require a Class A fire rated assembly, Polystick XFR or Titanium FR (both products are distributed by TMP) must be installed over the entire roof with combustible decks.

Follow manufactures instructions carefully for all underlayment installation.

#### **Drag Load Requirements**

All panels must be pinned at one end to resist the drag load caused by snow loads, live loads, and the weight of the panel. Drag load is a function of roof slope, actual load and length of panels. Contact **Taylor Metal Products** for specific drag load requirements.



### **Notes to Designer / Installer**

#### **Ventilation/Insulation**

It is the responsibility of the designer to determine the material types needed to control condensation and to insulate and ventilate the roof system. Applications over rigid insulation may require blocking for solid attachment and framing the perimeter for installation of perimeter flashings.

#### Oil Canning

Flat metal surfaces will display waviness commonly referred to as "oil canning." Oil canning is caused by a variety of conditions. Steel mill tolerances, variations in or uneven substrates and roofing underlayments. Oil canning is a characteristic of metal roofing, not a defect and is not a cause for rejection. **Taylor Metal Products** offers **Slim-Lock™** with striations or accent ribs to help minimize oil canning.

#### **Thermal Movement**

The Panels and the flashings must be allowed to expand and contract, especially with longer length panels. The panel may need to have a slight gap where the panel hooks the offset cleat to allow for thermal movement of the panels.

#### **Snow Design**

The following details do not address all conditions for snow environments. Consult with the designers, engineers, and others for acceptable details to accommodate your project and climate conditions. When possible gutters, valleys, pitch changes or other penetrations should be minimized in snow areas.

All roof penetrations should be located as close to the ridge or "pin point" top of roof. Snow country requires special designs for valleys to accommodate accumulation of snow and ice from uphill panels. Roof design should be considered in snow areas. Roof design should help resist the melting and freezing of snow and ice.

A fit for purpose roof design has the greatest impact on maintaining a damage free roof system in snow areas. Please contact a Taylor Metal Products representative for assistance in detail designs and appropriate panel selection for specific climate and building conditions.

### **Handling and Storage**



#### Handling / Storage & Safety

Handle materials with care when off-loading or moving materials to avoid damage to panels or flashings. Long panels may require two or more pick-up points, properly spaced to avoid damaging panels. Plan ahead; contact Taylor Metal Products for recommendations on handling/hoisting long panels.

Store the panels, flashings and accessories in a dry, well ventilated area, off the ground. If covering, allow ventilation around panels. Elevate one end of bundle to allow drainage of wet materials.

Wear clean, soft-soled shoes when walking on roofing panels to avoid damage to the painted finish.

Take care that sand, gravel, dirt, etc. sticking to your shoes is not carried onto the roof, scratching or otherwise damaging the finish on the roofing material. Walking on asphalt impregnated felt paper, especially on a hot day, can cause the asphalt to stick to your shoes and be tracked on to the roofing material.

Take care when painting to avoid getting over spray on the roofing material. Remember that wind can carry paint particles some distance. Over spray can cause the finish of the roofing material to look dull and may void your warranty.

Secure materials, especially when leaving the site, on the ground or roof to prevent winds from moving the materials. Wind-blown materials may cause damage to the material, property or persons.

Always use proper safety equipment and attire to minimize risk of cuts or other injuries.

Do not walk on panels that have not been completely installed.

Do not walk on major ribs of panels.


Metal roofs that are wet or dusty can be extremely slippery. Wear soft soled shoes and a safety harness to minimize risk of falling.

Avoid installing metal panels in windy conditions.

Safety considerations are the responsibility of the installer and his crew. Be sure to and **use common sense** generally accepted safety practices when installing roofing materials.




### **Standard Eave**

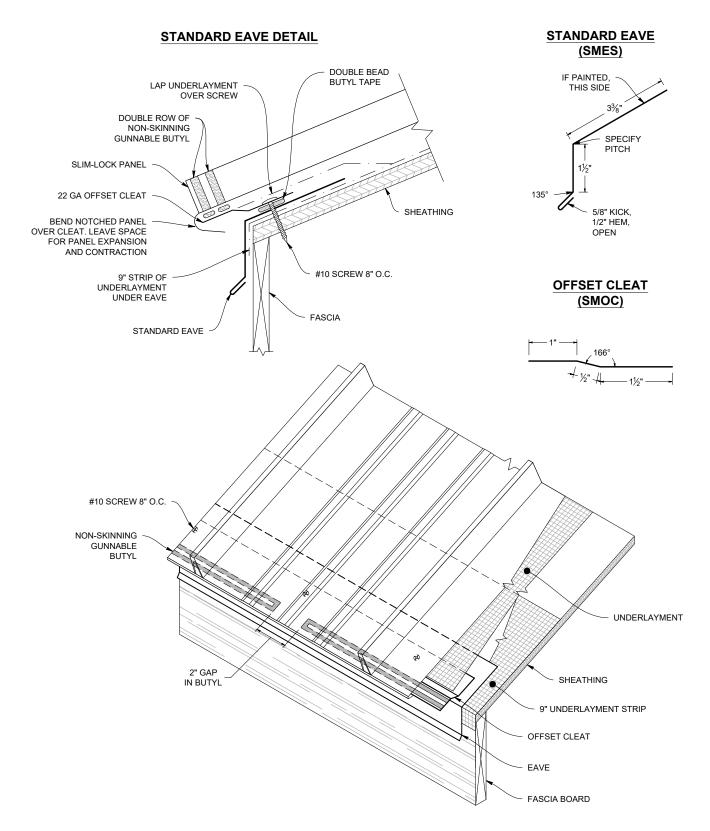


### **Hook Eave**



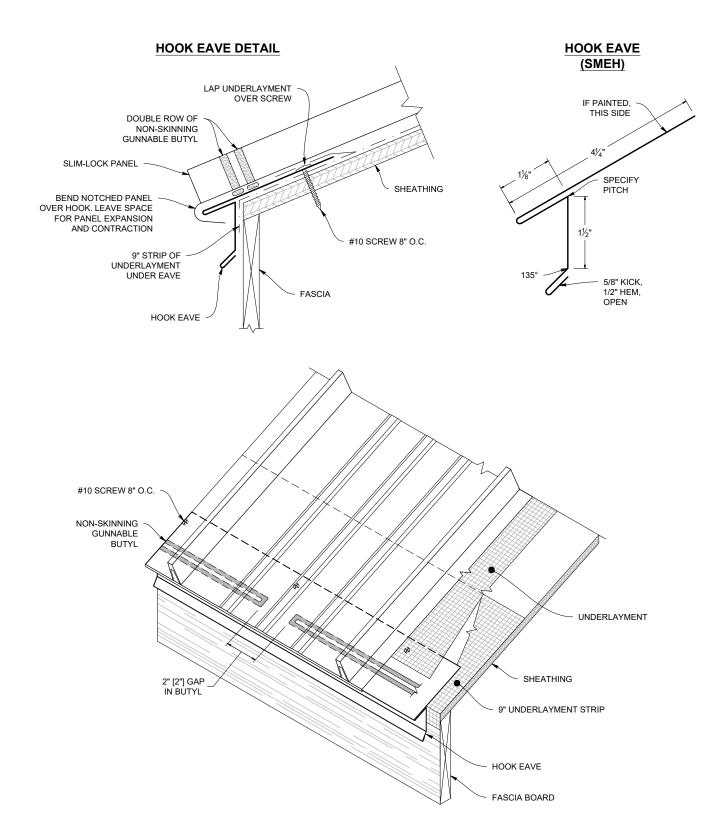




### **Gutter / Hook Eave**

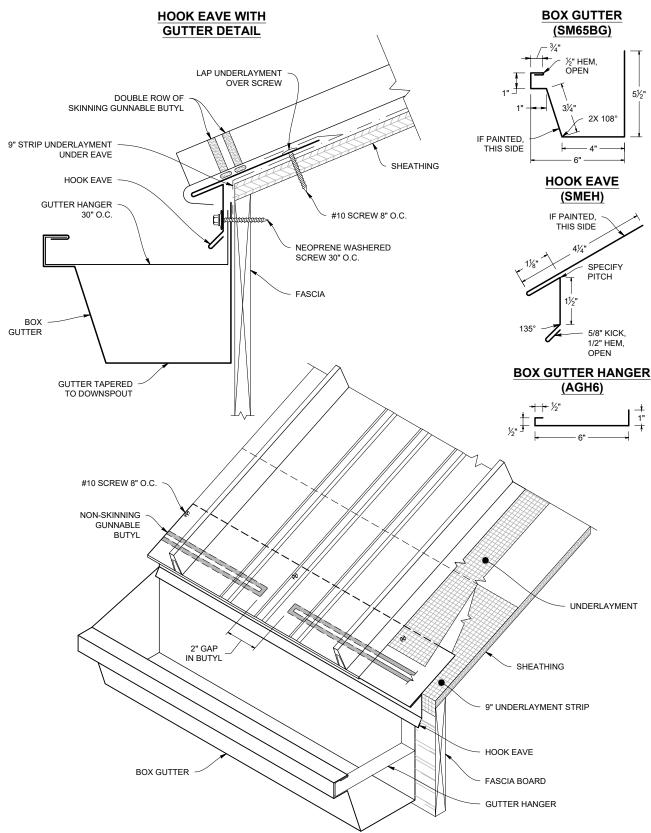


### **Standard Ridge**




#### STANDARD RIDGE DETAIL

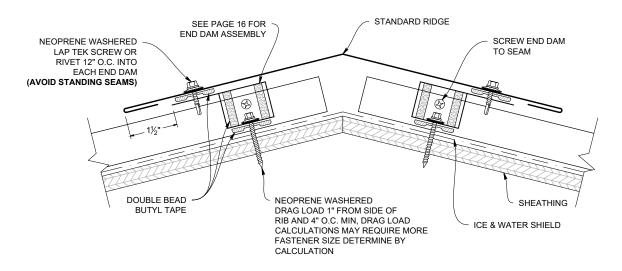

### STANDARD RIDGE (SMRS)




#### STANDARD RIDGE LAP

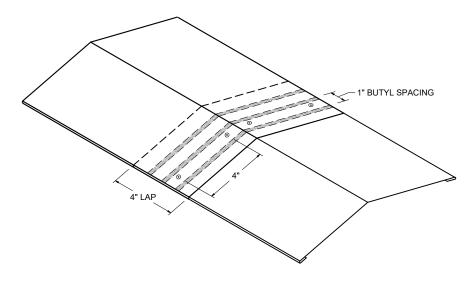




### **Vented Ridge**


#### **VENTED RIDGE DETAIL**

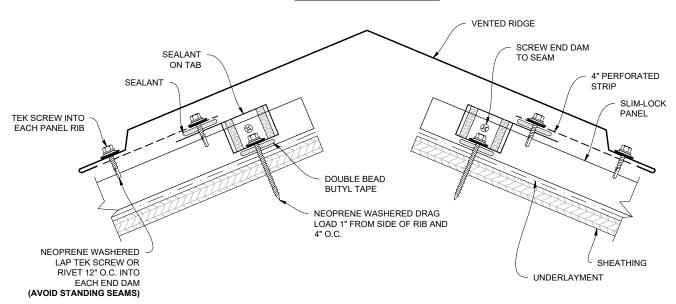

### RIDGE FULL VENTED (SMRFV)

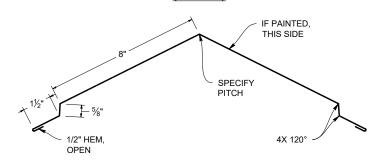


#### **VENTED RIDGE LAP**

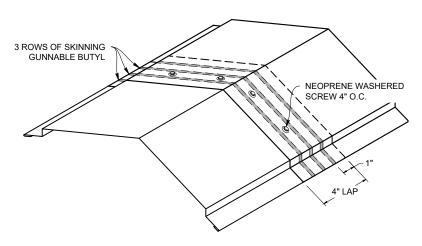



### **End Dam Attachment**



#### **END DAM ATTACHMENT APPLICATION**

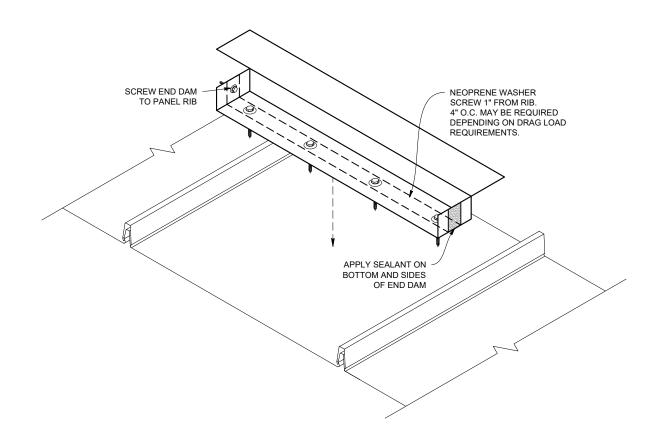

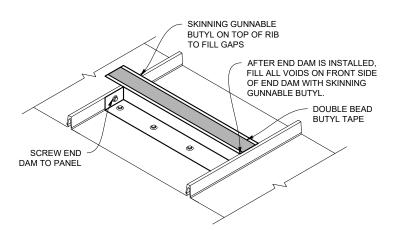




**Note:** All screws must be fastened into solid substrate. Flashing must be lapped 4" with 3 rows of gunnable butyl.

16




#### **VALLEY 24" FLASHING OFFSET CLEAT** (SMVF) (SMOC) IF PAINTED, SPECIFY PITCH THIS SIDE 1" [1"] 11" [11"] **VALLEY 24" DETAIL** (3:12 Or Greater Pitch) GUNNABLE BUTYL 8" FROM EAVE FIRST CLIP 12" FROM VALLEY NON SKINNING **BUTYL CAULK** 4" MIN. #10 PAN/WAFER HEAD OFFSET CLEAT LAP ICE & WATER SHIELD OVER SCREW DOUBLE BEAD BUTYL TAPE SHEATHING #10 FASTEN OFFSET CLEAT 8" O.C. ICE & WATER SHIELD **VALLEY LAP**

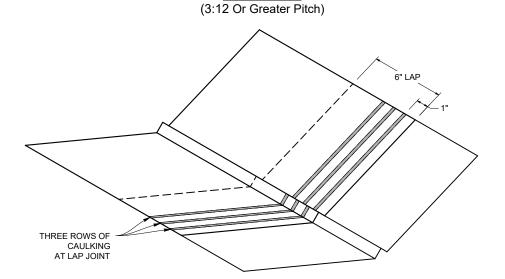


#### Valley - Low Pitch Slope Less than 3:12





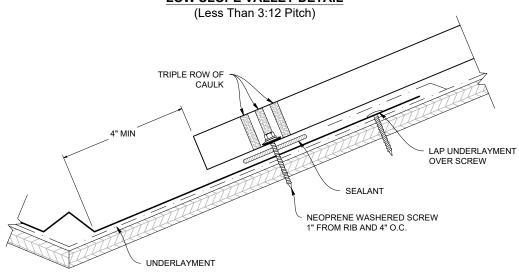


### VALLEY FLASHING (SMVF)




#### **LOW SLOPE VALLEY LAP**

(Less Than 3:12 Pitch)

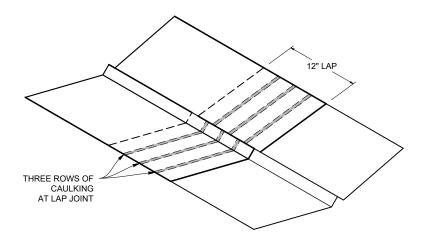



#### **Box Gable**

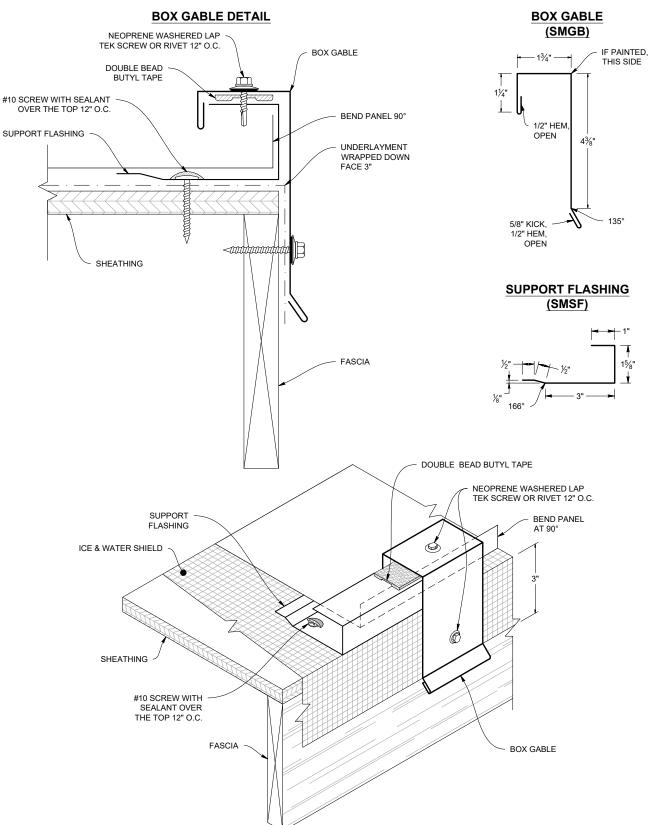


### **Alternate Gable**




### ALTERNATE L CLOSURE (SMALC)

### SUPPORT FLASHING (SMSF)

### ALTERNATE GABLE (SMGA)







# 1/2" HEM, OPEN 5/8" KICK, 1/2" HEM, OPEN 135°

#### **ALTERNATE GABLE DETAIL**


### GABLE SUPPORT CLEAT (SMGC)

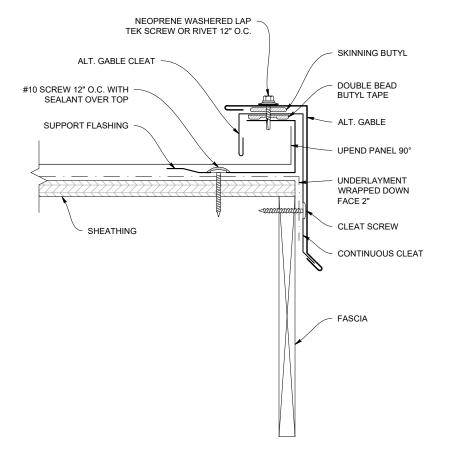





### **Sidewall**

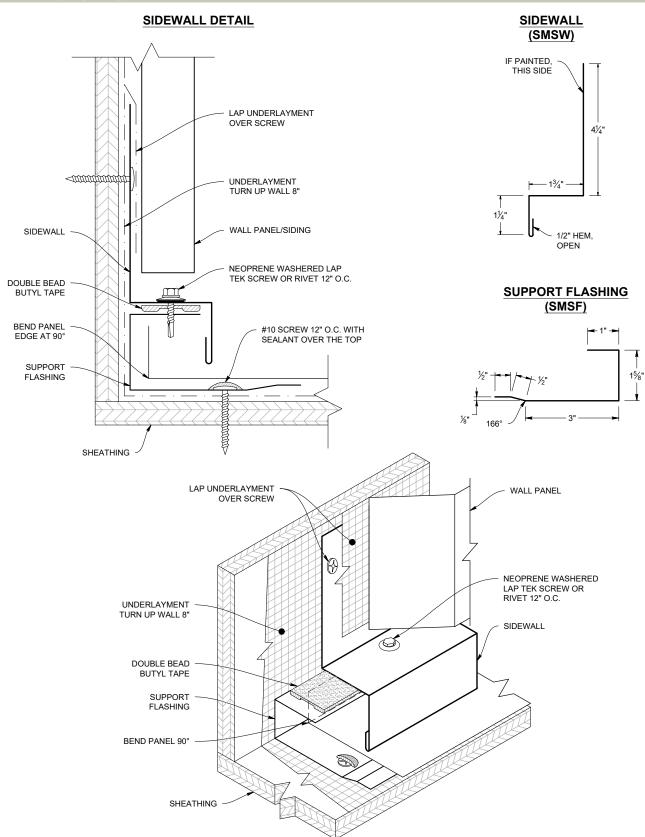


### **Peak Flashing**

(Ridge End Cap)




#### **PEAK FLASHING DETAIL**

(Ridge End Cap)

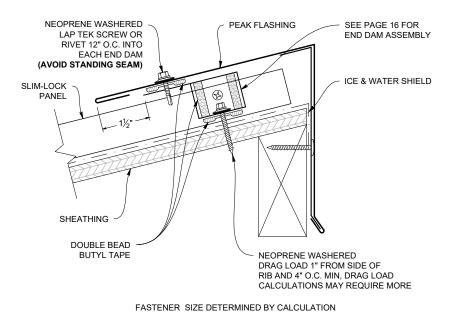



#### PEAK FLASHING (Ridge End Cap) (SMREC)



#### **PEAK CLEAT** (SMRECC)

#### **PEAK FLASHING LAP**

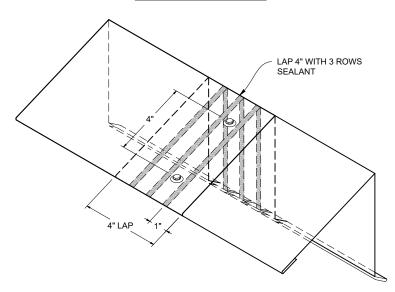







### **Pitch Change**

#### PITCH CHANGE DETAIL

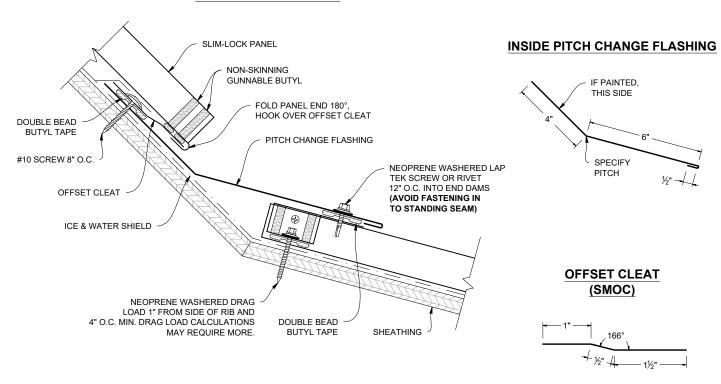


#### PITCH CHANGE LAP

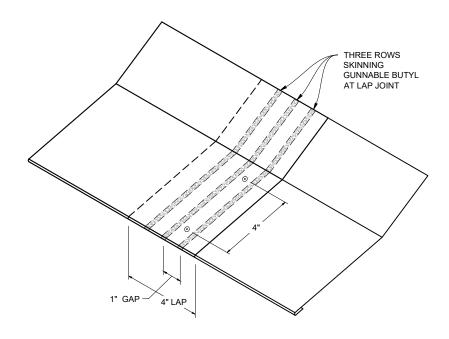


### **Endwall**



#### **ENDWALL DETAIL**

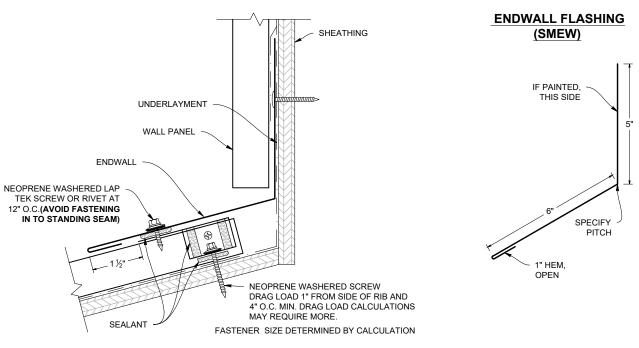


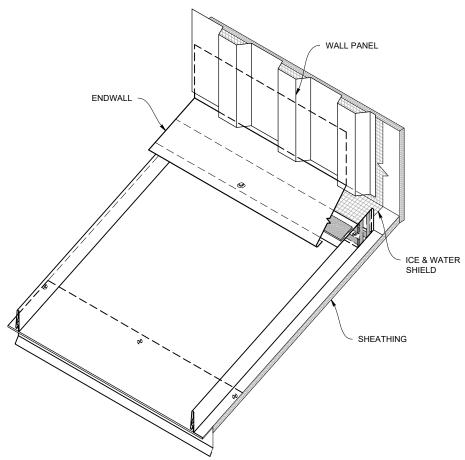




### **Vented Endwall**


#### **VENTED ENDWALL DETAIL**

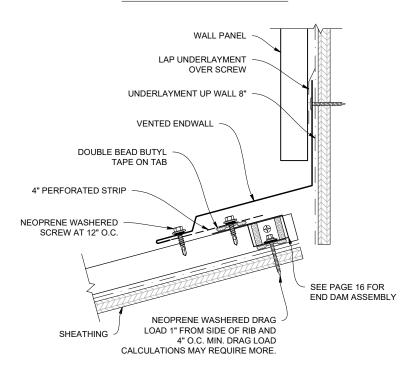

### VENTED ENDWALL FLASHING (SMEWV)





#### **ENDWALL LAP**

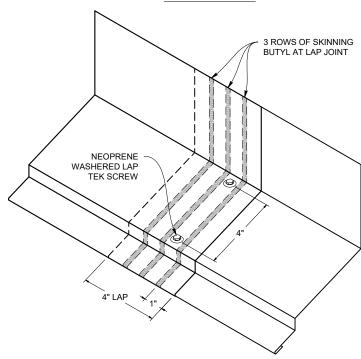

### **Curb Back Pan / Cricket**




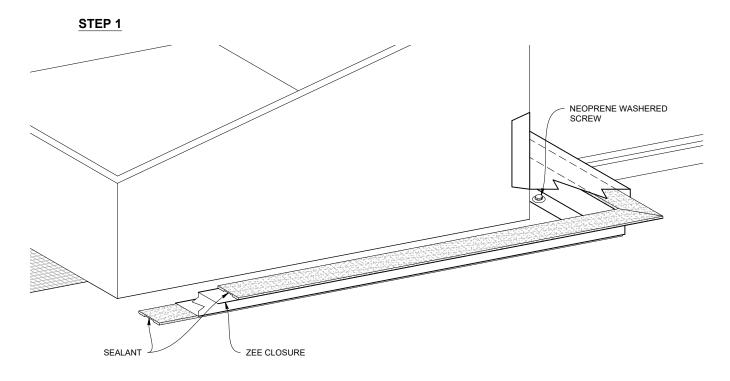

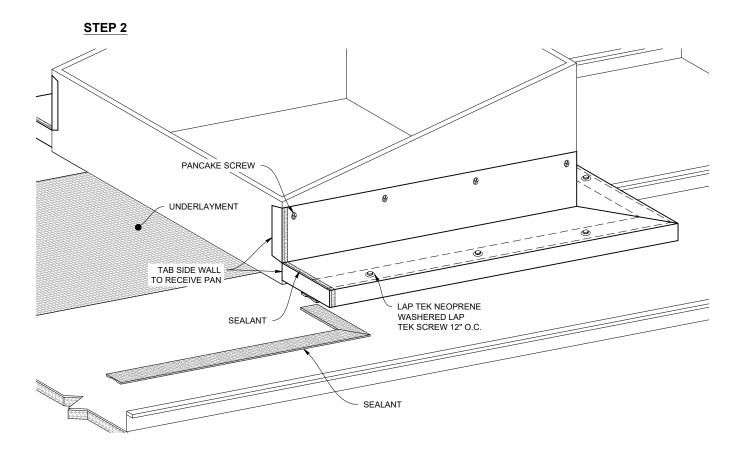




### **Curb Back Pan / Cricket**

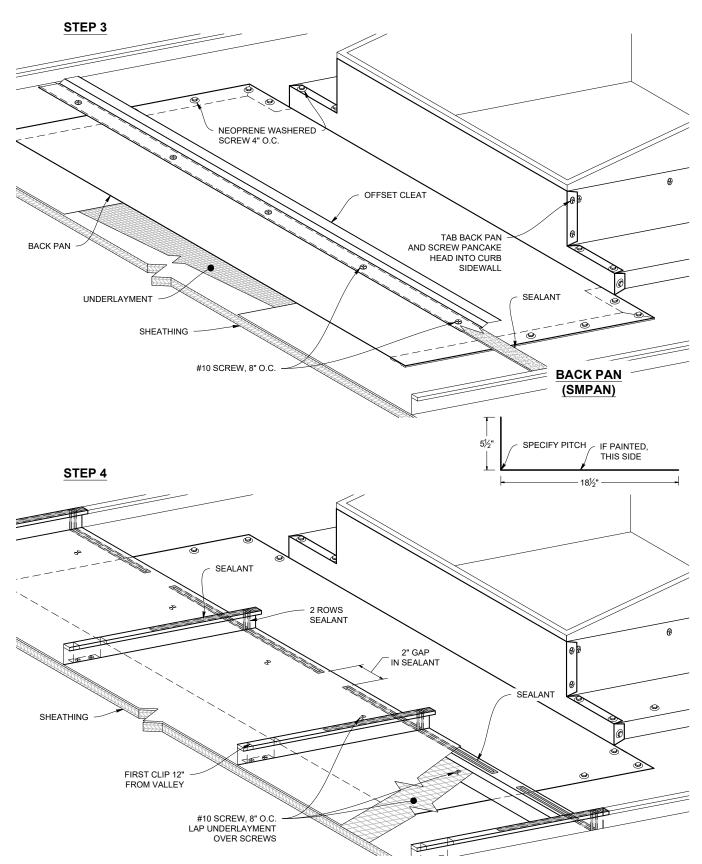

### **Curb Back Pan / Cricket**




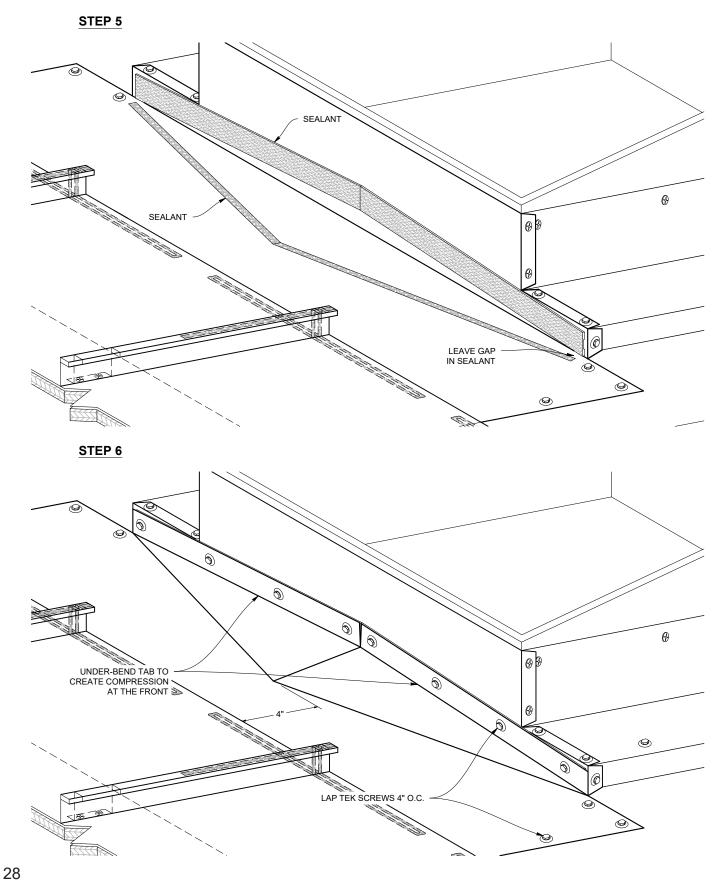




### **Curb Sidewall**


#### **CURB SIDEWALL DETAIL**

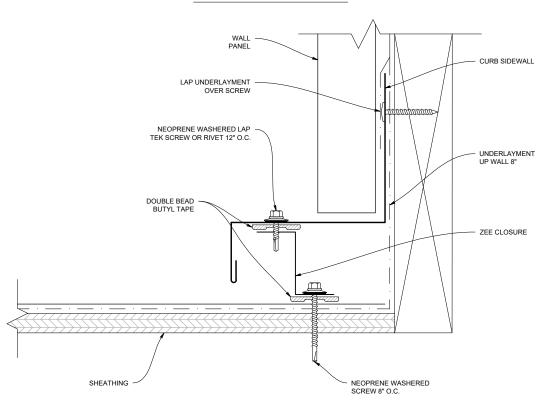

### ZEE CLOSURE (SMZC)




### CURB SIDEWALL (SMCSW)




### **Curb Endwall**



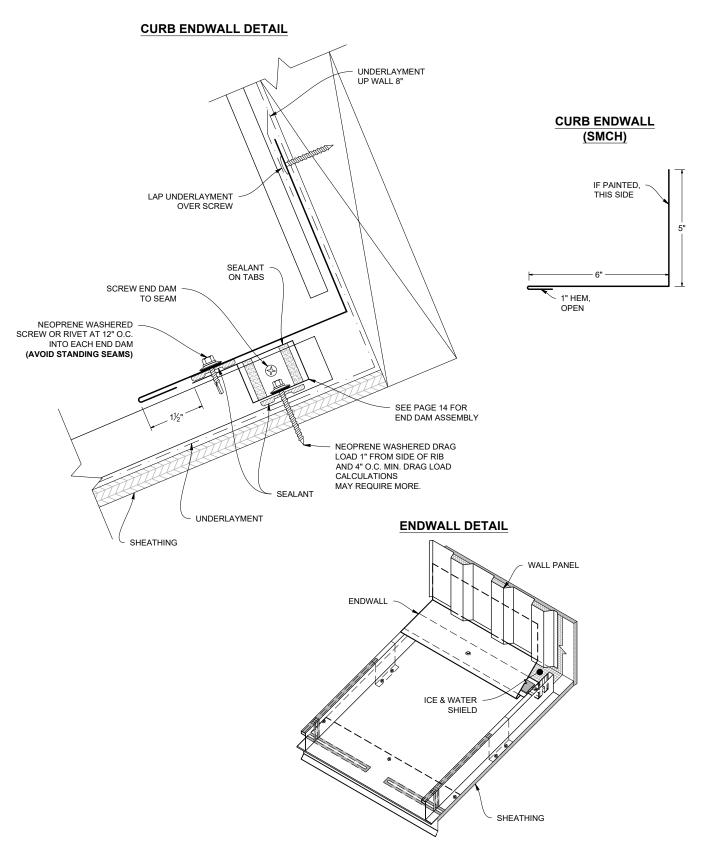




#### **Curb / Pan Cricket**

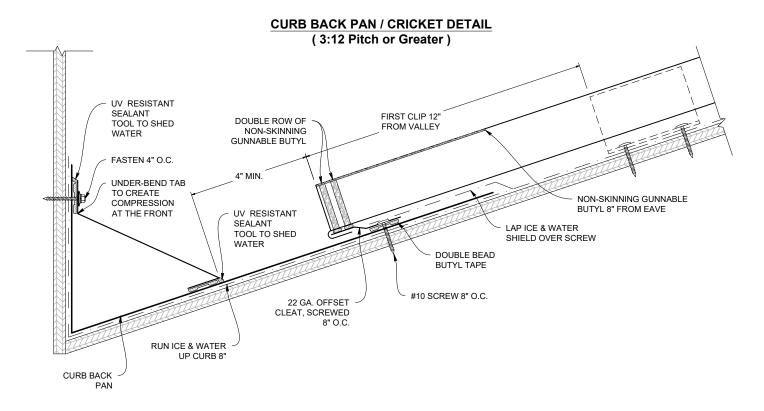


### CURB BACK PAN / CRICKET DETAILL ( Less Than 3:12 Pitch )

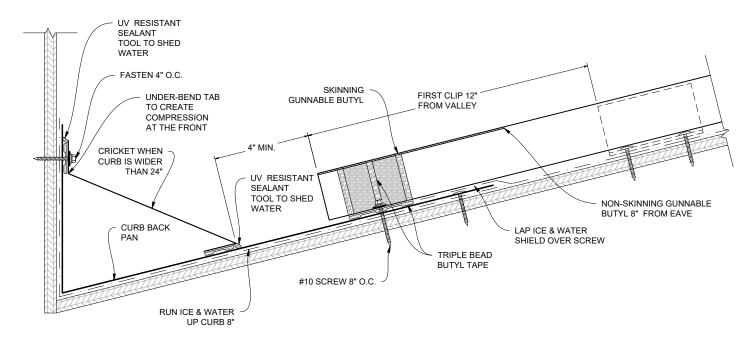

### **Eave to Gable Transition**




#### **EAVE TO GABLE TRANSITION APPLICATION**

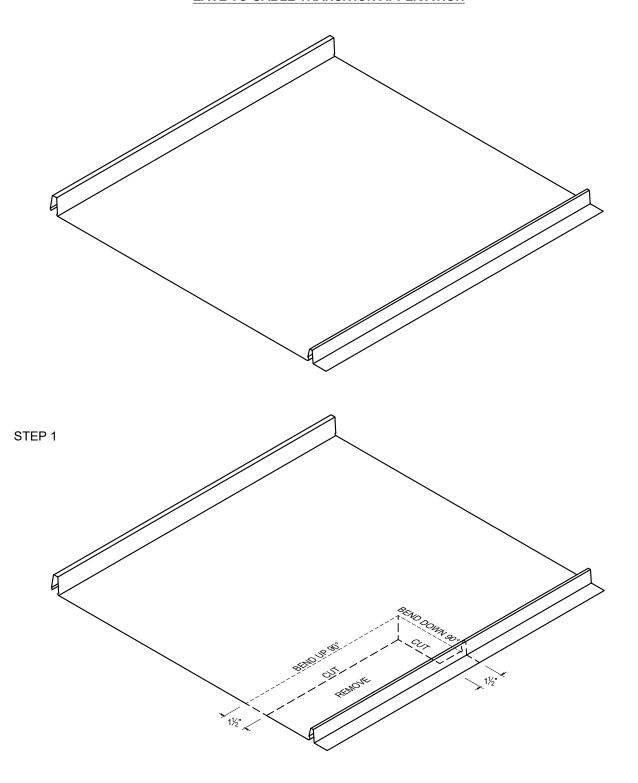




### **Eave to Gable Transition**

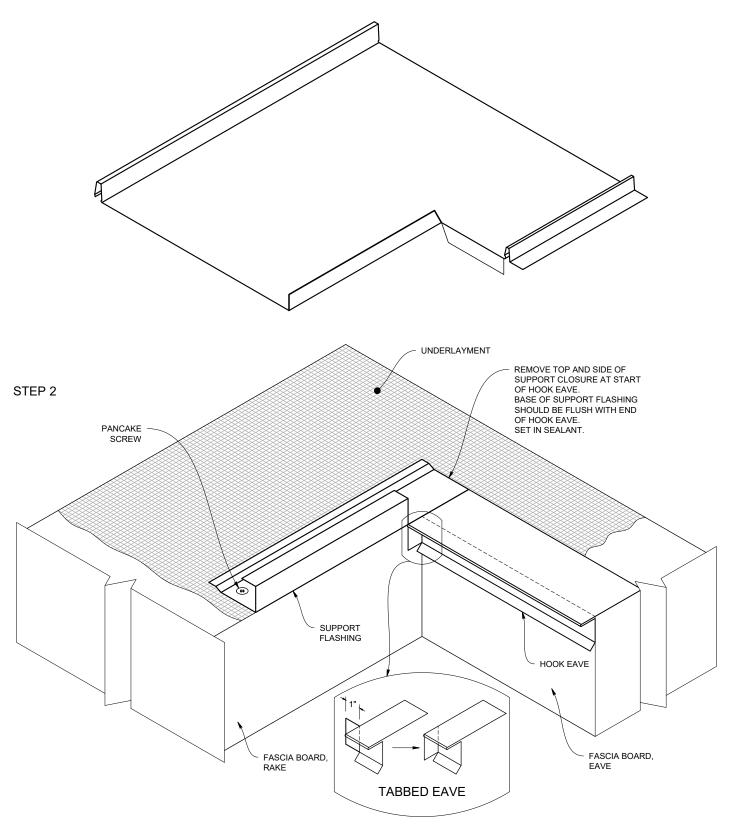

### **Eave to Gable Transition**



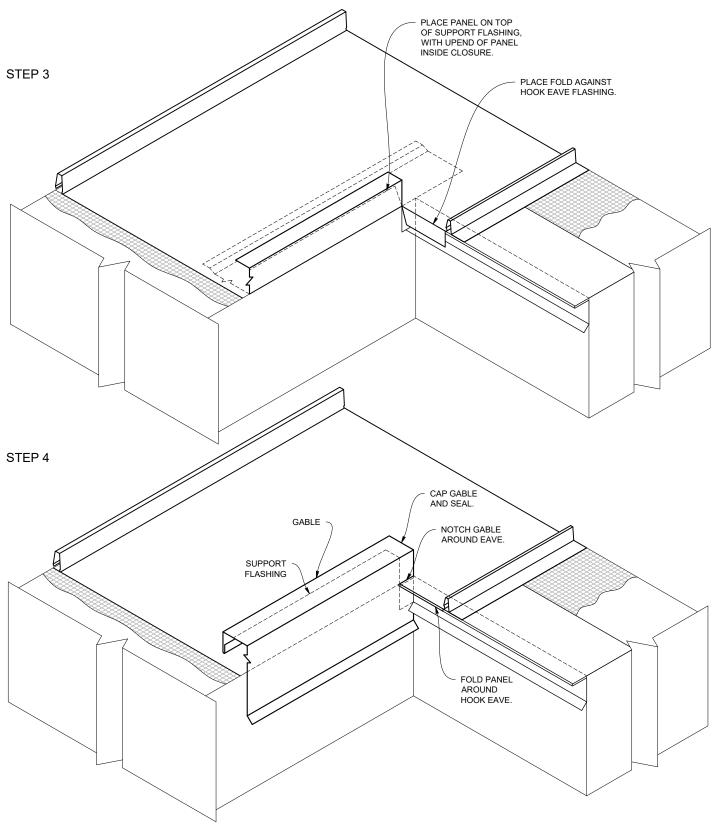


**Note:** All screws must be fastened into solid substrate. Flashing must be lapped 4" with 3 rows of gunnable butyl.


Main Menu




### **Pipe Penetration - on Plate**

#### FOR PIPES LOCATED GREATER THAN 20' FROM PIN POINT

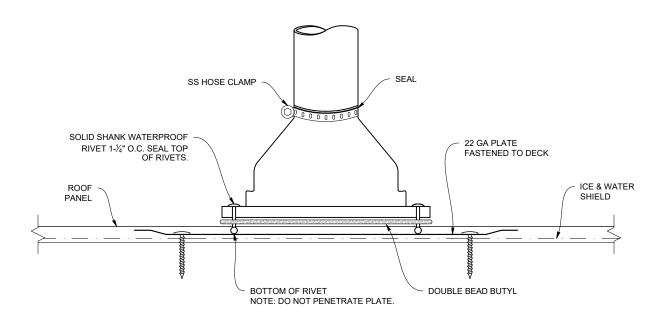








TWO OVERLAPPING 22 GAUGE PLATES


### **Pipe Penetration - on Rib**



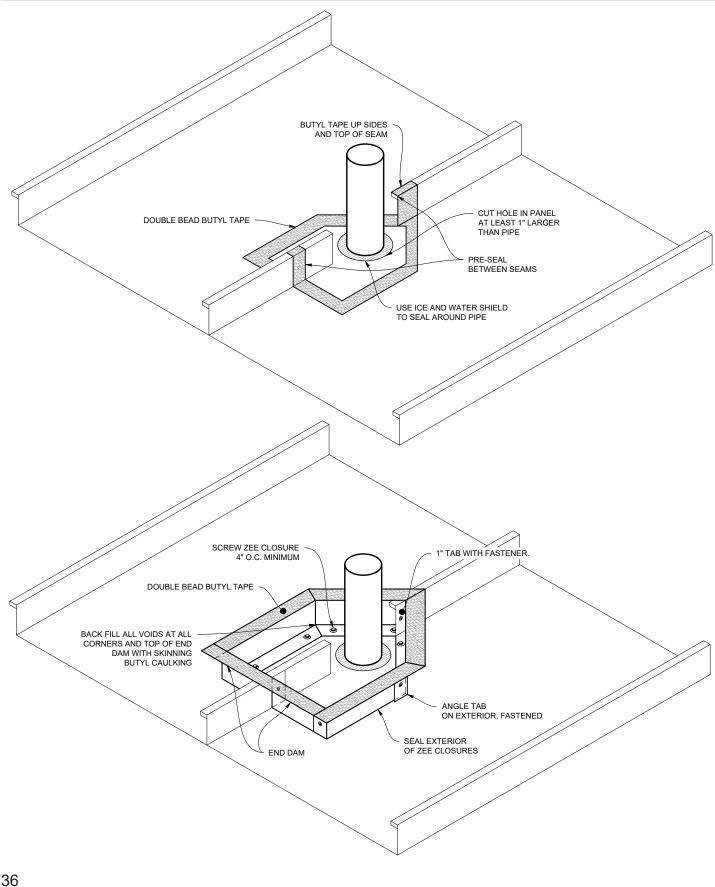




# Pipe Penetration - on Rib

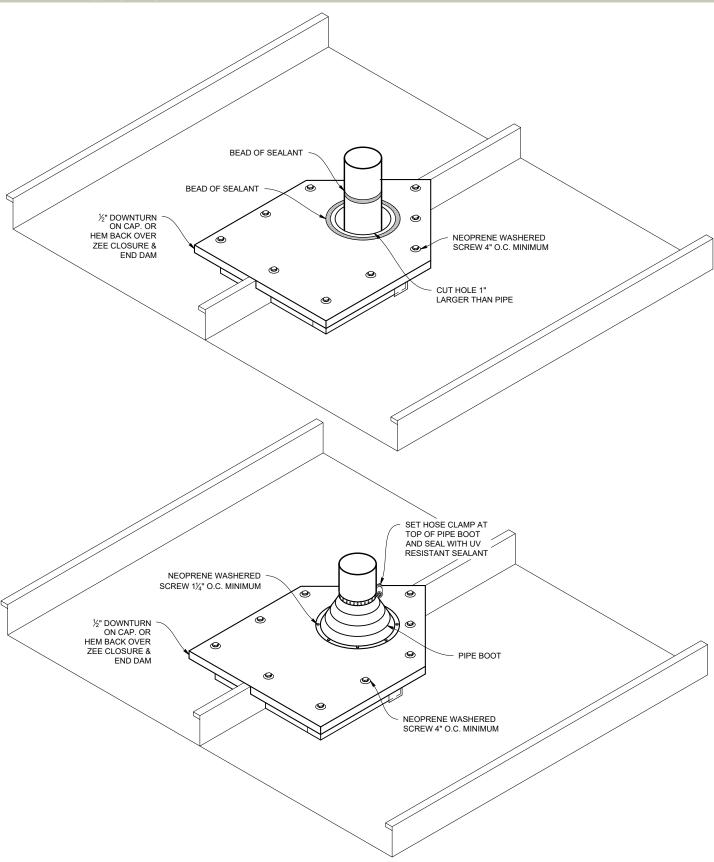


# Pipe Penetration - on Pan




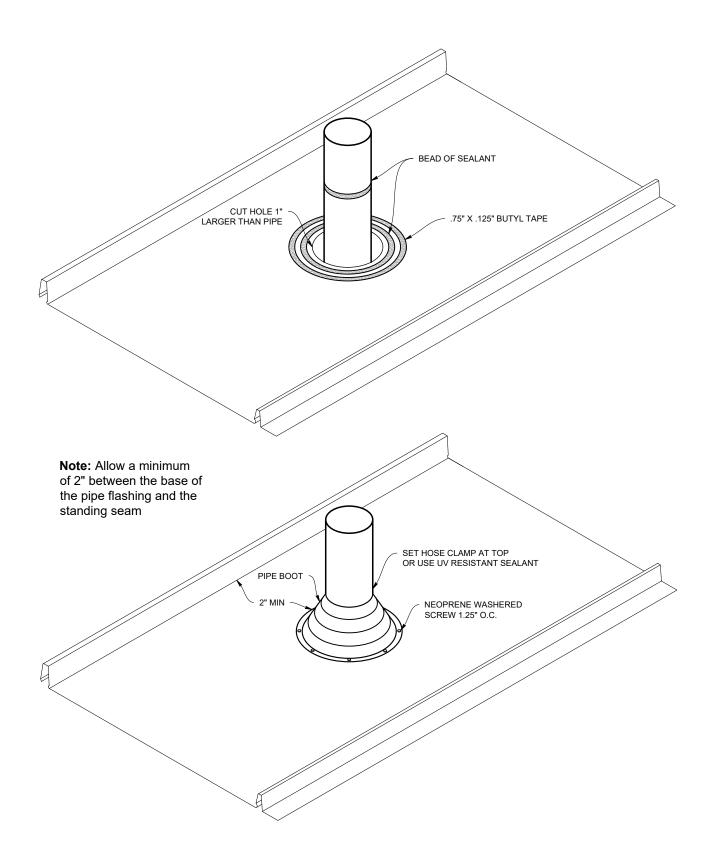




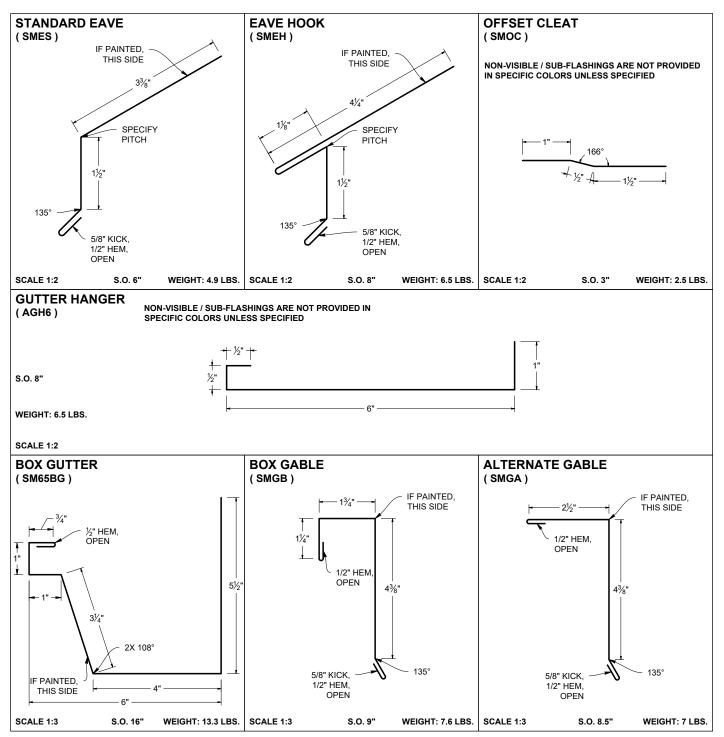




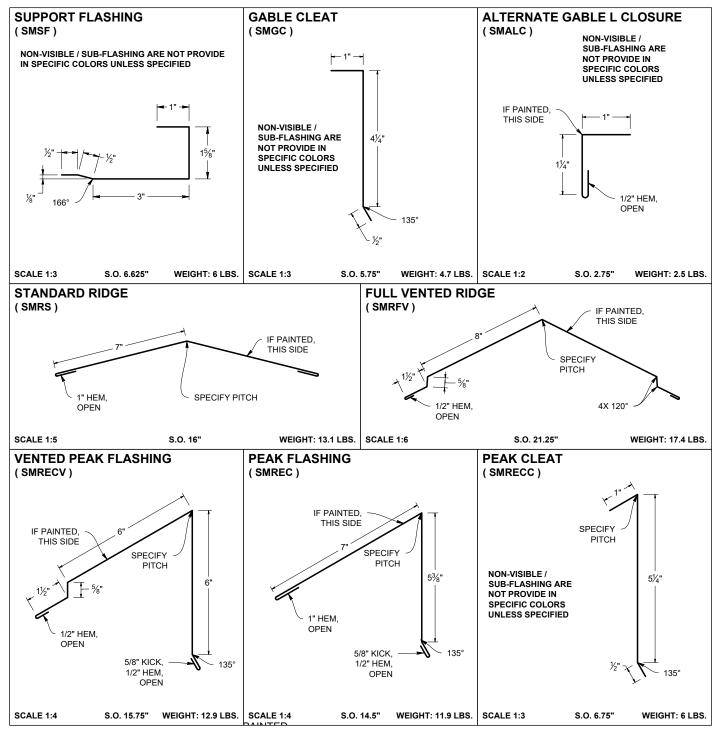



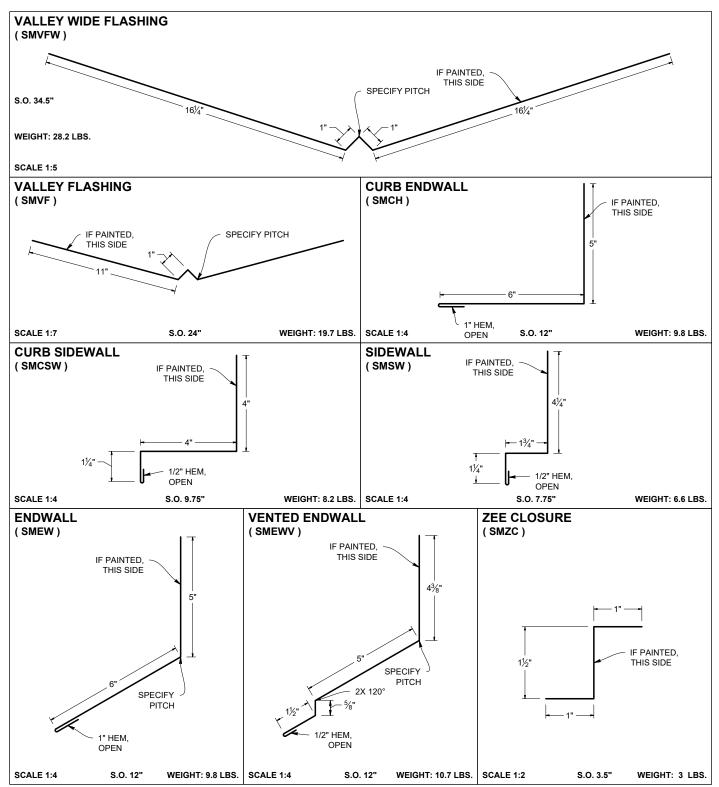



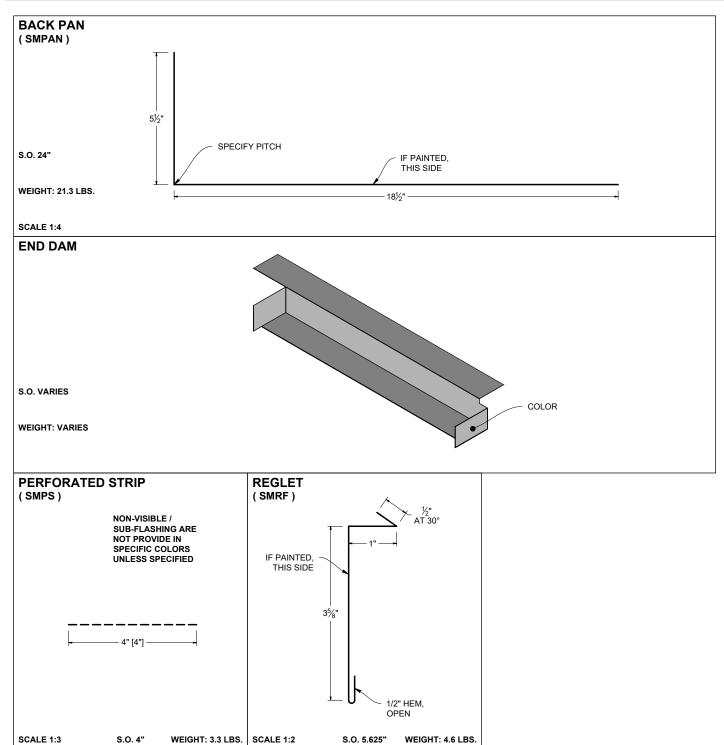

			C	rder	For	m	Inside Sal	e:	
	TA)		□ New O	rder [	□ Add-	on Orde	er □ Qu	ote	
=			PO #:			_ Date:			
Sold To:									
Order Co	ntact:			<u> </u>	Onip				
Phone #:				<u> </u>			□ Delivery		
Fax #:				<u> </u>	Day: _		<b>Delivery Date</b>	ə:	<del></del>
	ultural		☐ Resident			Commeric	al Route:		
are in B	d Panels old font.	Panels with Ribs		ີ່ Flat ( <sup>Flat n</sup> on S	ot available <b>)</b> treamLine ant? <u>Y</u> / <u>N</u>	12" N	/8" Slim-Lock* MS-200* MS-200*	Color: Pitch: Gauge:	
∐PBR  □ <sub>Marion</sub>	"R" Panel		ID Tabbed? Y / N (REQUE) $EALTE = N / N (Standard for Standard for$			mLine)   🔛	MS-200*	Dmatch:	
Max Co				_	າe**(circle): <u>1</u> ", ເ	——□ ;;	VIS-200*	Pallet: 10'	20' 30'
1—	Corrugated 7/8" Corruga	1 16 ated 16 Panels with	" Easy-Lock*	1/2" to 3  ]1"x12" Small ]1"x12" Life Choice:	3" Reveal: oothWall** etime Soffit		MS-150* MS-150* MS-150* MS-100* MS-100*	☐ 12" Versa- ☐ <b>14" Versa</b> ☐ 16" Versa- ☐ <b>18</b> " <b>Versa</b> ☐ <b>14 5/8" T-</b> I	a-Span* -Span* a-Span*
Tuff-Ril	•		(Available on Lifetime So				r Panel:		
Panel & Flashing Items			ck, Lifetime Soffit, Smoo 3, Tuff Rib, GR7, PBR,					3-200 flashings a	are 10'
Quantity	Length	Item D	escription	Part #	Quantity	Length	Item Desc	ription	Part #
Forgetting	ı <u> </u>	Un	l nderlayment?	Screv	vs?	Clips?	Caulking	? (	l Closures?
			alem, OR 97301	• F: 503-58	31-6877 •	•			 m

# **Custom Trim Order**



Custome	omer Name:									Job Name:															
Gauge: .				_		Cold	or:										Sta	ıtus:		0	rigir	nal I	⊐ <b>(</b>	Jpd	lated
Specify:	□ Aı	ngles		Co	olor	Sid	e 🗆	D	ime	ensi	ons		Stre	etch	out	t					_ C	usto	mer	· In	itials
S.O												S.C	)												
Dwg #:_	i	Pitch:			# (	of Pie	eces															ces:			
Descript	ion:										_	De	scrip	otior	n:										
Hems:	□Оре	en		Clos	sed		Slig	htly	/ Op	en		Не	ms:		] Op	en		C	lose	d		Sligh	ntly (	Эре	n
S.O												S.C	)												
Dwg #:_	F	Pitch:			# (	of Pie	eces					Dw	/g # <u>:</u>			Pit	ch:_		;	# of	Pie	ces:			
Descript	ion:										_	De	scrip	otior	n: _										
Hems:	□Оре	en		Clos	sed		Slig	htly	/ Op	oen		Не	ms:		]Op	en		□С	lose	ed		Sligl	ntly (	Эре	en

Please provide a drawing for each flashing with precise measurements and angles Fax to: 503-581-6877




# **Custom Trim Order**

Customer Name:							
Color:		Status:	□ Original □ Updated				
lor Side   Dimensions	□ Stretchou	t	Customer Initials				
	S.O						
# of Pieces:ed Slightly Open	Description: _						
# of Diagos:	Dwa #:	Pitch:	# of Pieces:				
# of Pieces:			# of Pieces:				
	_		sed □Slightly Open				
	Color:	Color:   Ior Side	Color: Status: In Status:				

Please provide a drawing for each flashing with precise measurements and angles Fax to: 503-581-6877

Phone: 503-581-8338 or 1-800-574-1388

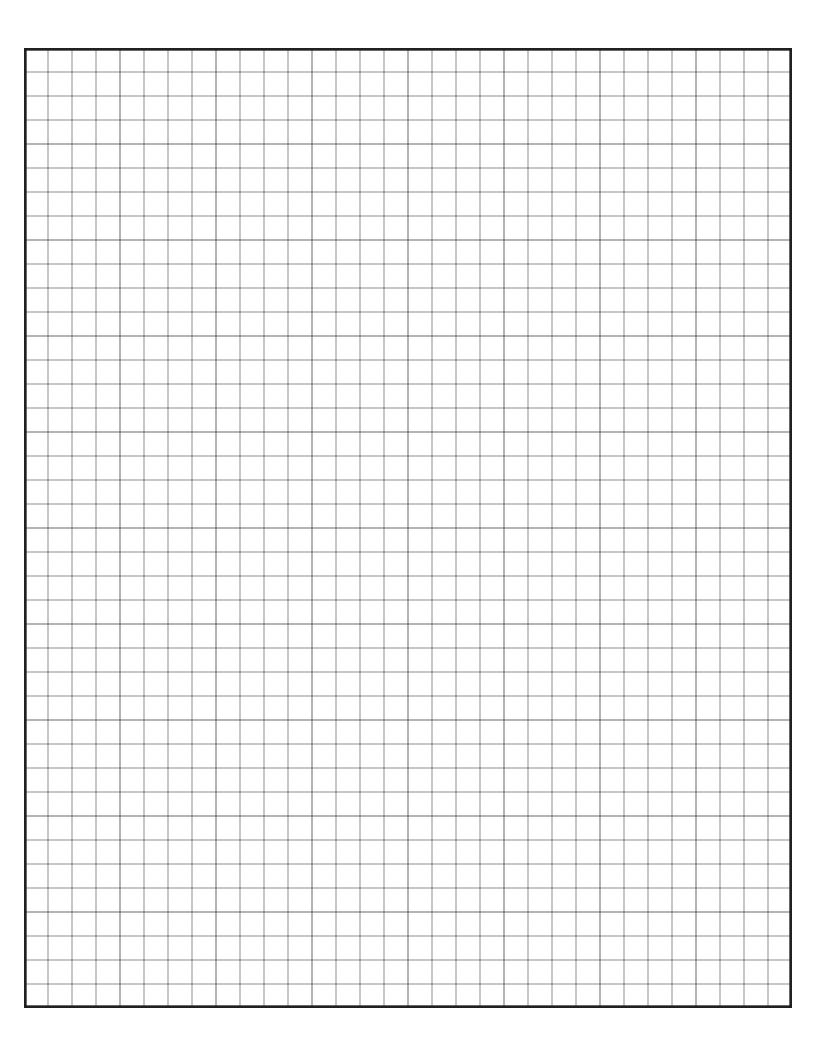



## QUALITY PRODUCTS EXCEPTIONAL SERVICE

### SALEM BRANCH

4566 Ridge Dr. NE Salem, OR 97301

Office: 503-581-8338 Toll Free: 1-800-574-1388 Fax: 503-581-6877

### **SACRAMENTO BRANCH**

3443 Airport Rd, Sacramento, CA 95834

Office: 916-318-8844 Toll Free: 1-800-574-1388 Fax: 916-993-4123

### **SPOKANE BRANCH**

1010 N Nelson St., Spokane, WA 99202 www.go-rsp.com

Office: 509-535-8667 Toll Free: 800-238-4057 Fax: 509-535-8682

### **AUBURN BRANCH**

2601 C St SW, Auburn, WA 98001

Office: 206-900-9923 Toll Free: 1-800-574-1388 Fax: 253-804-3545

### RIVERSIDE BRANCH

4880 Felspar St. Riverside, CA 92509

Office: 323-407-7457 Toll Free: 1-877-504-1594