




ICC
EVALUATION
SERVICE®


ICC-ES EVALUATION REPORT #5045 with CBC-CRC Supplement

CLIP ATTACHMENT



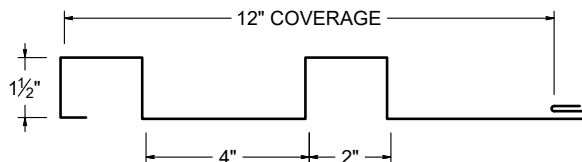


PANEL ATTACHMENT CLIP

STANDOFF CLIP

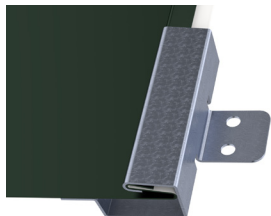

STANDARD CLIP

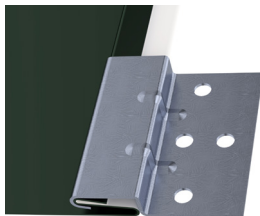

KEY FEATURES

- Manufactured in Salem, OR, Sacramento, CA and Riverside, CA
- 12" panel coverage
- 1-1/2" rib height
- 24 Tru-Gauge™ steel & .032" aluminum are standard and attached with high-performance concealed clips (some profiles *may* be available with an integrated screw flange option -- *please inquire*)
- Screw flange is not available in heavier gauges:
 - 22 Tru-Gauge™ steel and .040" aluminum
 - Custom 20 & 18 Tru-Gauge™ steel and .050" & .063" aluminum
- Aluminum is recommended within 1000 ft of salt water (*not required*)
- 3' to 32'9" panel lengths (*Inquire for longer or shorter lengths*)
- Custom profiles available
- Vertical or horizontal wall application
- Acceptable for use as a soffit panel
- Interchangeable panel widths and configurations
- Perforated options available (*please inquire*)

TESTING

-  ICC-ESR #5045 with CBC-CRC Supplement
- ASTM A653/A924 - G-90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume® AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM D6578 - Anti-Graffiti
- ASTM E283 - Air infiltration (wall)
- ASTM E331 - Water infiltration (wall)
- ASTM E1592 - Structural uniform static air pressure
- ASTM E1646 - Water infiltration (roof)
- ASTM E1680 - Air infiltration (roof)

WEIGHT CHART

NX-3A	TYPE	24 GA STEEL	22 GA STEEL	20 GA STEEL	18 GA STEEL	.063" ALUM	.050" ALUM	.040" ALUM	.032" ALUM
THICKNESS		0.0236"	0.0285"	0.0356"	0.0466"	0.063"	0.050"	0.040"	0.032"
WEIGHT/LINFT	CLIP ATTACH	1.685 LBS	1.975 LBS	2.467 LBS	3.229 LBS	1.525 LBS	1.211 LBS	0.968 LBS	0.798 LBS
WEIGHT/SQFT	CLIP ATTACH	1.685 LBS	1.975 LBS	2.467 LBS	3.229 LBS	1.525 LBS	1.211 LBS	0.968 LBS	0.798 LBS
WEIGHT/LINFT	SCREW FLANGE	1.830 LBS	2.331 LBS	2.912 LBS	3.812 LBS	1.801 LBS	1.429 LBS	1.143 LBS	0.867 LBS
WEIGHT/SQFT	SCREW FLANGE	1.830 LBS	2.331 LBS	2.912 LBS	3.812 LBS	1.801 LBS	1.429 LBS	1.143 LBS	0.867 LBS

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
12 PSF<0.01 CFM/ft²-PASS	20.5 PSF - Pass
Intertek Test Result L5460.01-901-44 R1	
Intertek Test Result L5461.01-901-44 R1	

NEGATIVE LOAD CHART WITH CLIP ATTACHMENT

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)								
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Negative Load								
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	1.5'	2'	2.5'	3'	3.5'	4'	4.5'	5'
12	24	50	1.67	0.1320	0.1270	0.1230	0.1164	0.1210	0.1497	155.0	141.9	128.8	115.6	102.5	89.4	76.3	63.1	50.0
12	22	50	1.97	0.1647	0.1580	0.1562	0.1435	0.1490	0.1911	155.0	141.9	128.8	115.6	102.5	89.4	76.3	63.1	50.0
12	20	33	2.40	0.2290	0.2210	0.2267	0.2000	0.2080	0.2415	155.0	141.9	128.8	115.6	102.5	89.4	76.3	63.1	50.0
12	18	33	3.10	0.3160	0.3050	0.3233	0.2780	0.2890	0.3151	155.0	141.9	128.8	115.6	102.5	89.4	76.3	63.1	50.0

- Theoretical section properties for still panels have been calculated per AISI S100 Specifications for Design of Cold-Formed Steel Structural Members. Intertek L3671.01-301-44 RO
- Charted Load/Span values are based on ASTM E1592-05, divided by a 2.00 Factor-of-Safety.
- Minimum recommended substrate (structure) recommendations:
 - Open-Framing (i.e. purlins)-16ga (design thickness 0.0566")
 - Plywood/OSB-15/32" or thicker is recommended to assure an effective degree of fastener thread engagement.
 - METAL DECK - 22ga (design thickness 0.0283")

POSITIVE LOAD CHART WITH CLIP ATTACHMENT

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)									
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Positive Load									
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
12	24	50	1.67	0.1320	0.1270	0.1230	0.1164	0.1210	0.1497	1410.9	705.5	341.7	192.2	123.0	85.4	62.8	48.1	38.0	30.8
12	22	50	1.97	0.1647	0.1580	0.1562	0.1435	0.1490	0.1911	1896.4	948.2	433.9	244.1	156.2	108.5	79.7	61.0	48.2	39.1
12	20	33	2.40	0.2290	0.2210	0.2267	0.2000	0.2080	0.2415	1782.7	891.4	419.8	236.2	151.1	105.0	77.1	59.0	46.7	37.8
12	18	33	3.10	0.3160	0.3050	0.3233	0.2780	0.2890	0.3151	2850.0	1312.9	583.5	328.2	210.1	145.9	107.2	82.1	64.8	52.5
12	0.032"	19	0.80	0.2330	0.2330	0.2394	0.2330	0.2330	0.4439	216.4	108.1	58.5	32.9	21.1	14.6	10.8			
12	0.040"	19	0.97	0.2860	0.2860	0.2941	0.2860	0.2860	0.5449	332.7	166.4	89.9	50.6	32.4	22.5	16.5	12.6	10.0	
12	0.050"	19	1.17	0.3500	0.3500	0.3594	0.3500	0.3500	0.6637	508.2	254.1	137.4	77.3	49.5	34.4	25.2	19.3	15.3	12.4

- Theoretical section properties for Steel panel shelve have been calculated per 2020 AISI S100 North America Specifications for the Design of Cold-Formed Steel Structural Member.
- Allowable loads for Steel panels are calculated in accordance with 2020 AISI S100 specifications considering bending , shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
- When panels are installed over solid or closely fitted sheathing, the capacity is limited to the capacity of the underlying sheathing.

PANEL ATTACHMENT



Fastener Notes:

- When possible, lap panels away from prevailing wind direction.
- 15/32" OSB: #10 Burr Buster fasteners.
- 15/32" Plywood: #10 DP Fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- Dimensional lumber: #10 DP. Screws should penetrate the lumber 1".
- 16ga (or less) Steel furring: #10 or #12 Fastener with DP-1
- All trim screws used for roof or wall applications should have EPDM sealing washers.

Rev. Date 08-26