





ICC-ES EVALUATION REPORT #5045 with CBC-CRC Supplement (Coming in 2025-2026)


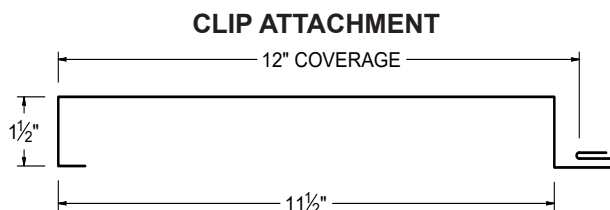


PANEL ATTACHMENT CLIP

STANDOFF CLIP



STANDARD CLIP

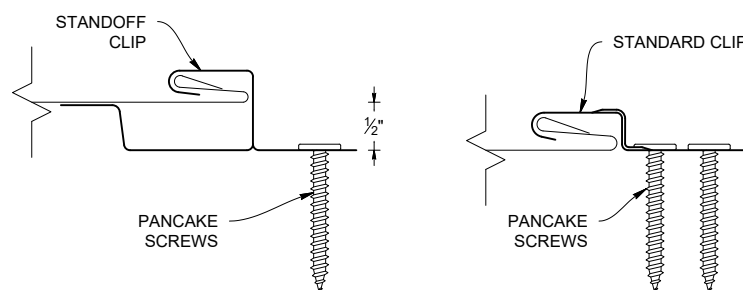

KEY FEATURES

- 12" panel coverage
- 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum.
- Custom 20 & 18 Tru-Gauge™ and .050" Aluminum. These require the use of high performance clip. *(please inquire)*
- Seamless runs, fewer runs and less labor
- 1-1/2" deep panel
- 2' to 20'10" panel lengths *(Inquire for longer lengths)*
- Custom profiles available
- Vertical or Horizontal Wall Application
- Acceptable for use as a soffit panel
- Interchangeable panel widths and configurations
- Manufactured in Salem, Sacramento, and Riverside
- Perforated options available *(please inquire)*

TESTING

-  ICC-ESR #5045 with CBC-CRC Supplement *(Coming in 2025-2026)*
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate

WEIGHT CHART

NX-6	TYPE	24 GA STEEL	22 GA STEEL	20 GA STEEL	18 GA STEEL
THICKNESS		0.0236"	0.0285"	0.0356"	0.0466"
WEIGHT/LINFT	CLIP ATTACH	1.444 LBS	1.673 LBS	2.090 LBS	2.736 LBS
WEIGHT/SQFT	CLIP ATTACH	1.444 LBS	1.673 LBS	2.090 LBS	2.736 LBS