





ICC-ES EVALUATION REPORT #5045 with CBC-CRC Supplement (Coming Soon)


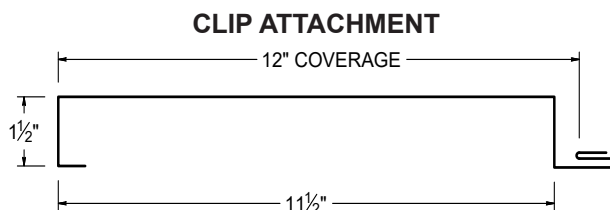


PANEL ATTACHMENT CLIP

STANDOFF CLIP



STANDARD CLIP

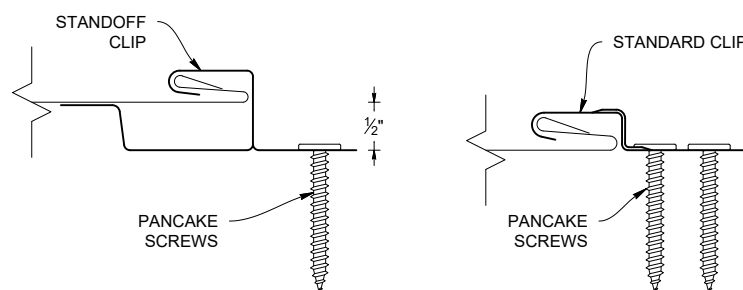

KEY FEATURES

- Manufactured in Salem, OR, Sacramento, CA and Riverside, CA
- 12" panel coverage
- 1-1/2" rib height
- 24 Tru-Gauge™ steel & .032" aluminum are standard and attached with high-performance concealed clips (some profiles *may* be available with an integrated screw flange option -- *please inquire*)
- Screw flange is not available in heavier gauges:
 - 22 Tru-Gauge™ steel and .040" aluminum
 - Custom 20 & 18 Tru-Gauge™ and .050" aluminum
- Seamless runs, fewer runs and less labor
- 3' to 32'9" panel lengths
(*Inquire for longer or shorter lengths*)
- Custom profiles available
- Vertical or horizontal wall application
- Acceptable for use as a soffit panel
- Interchangeable panel widths and configurations
- Perforated options available (*please inquire*)

TESTING

-  ICC-ESR #5045 with CBC-CRC Supplement (Coming Soon)
- ASTM A653/A924 - G-90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume® AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM D6578 - Anti-Graffiti
- ASTM E283 - Air infiltration (wall)
- ASTM E331 - Water infiltration (wall)
- ASTM E1592 - Negative structural uniform static air pressure

WEIGHT CHART

NX-6	TYPE	24 GA STEEL	22 GA STEEL	20 GA STEEL	18 GA STEEL
THICKNESS		0.0236"	0.0285"	0.0356"	0.0466"
WEIGHT/LINFT	CLIP ATTACH	1.444 LBS	1.673 LBS	2.090 LBS	2.736 LBS
WEIGHT/SQFT	CLIP ATTACH	1.444 LBS	1.673 LBS	2.090 LBS	2.736 LBS