





ICC
EVALUATION
SERVICE®

ICC-ES EVALUATION REPORT #5045 with CBC-CRC Supplement


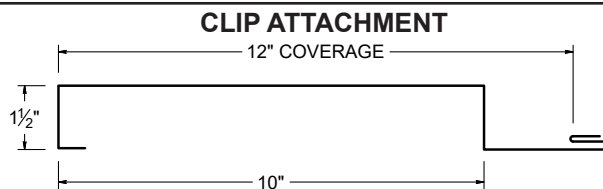


PANEL ATTACHMENT CLIP

STANDOFF CLIP



STANDARD CLIP

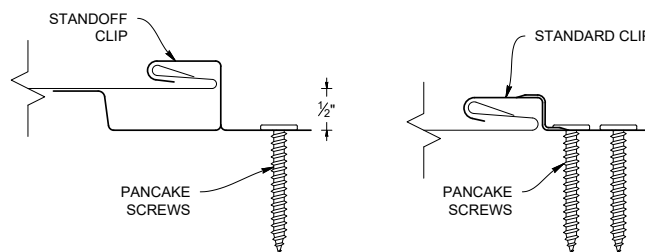

KEY FEATURES

- Manufactured in Salem, OR, Sacramento, CA and Riverside, CA
- 12" panel coverage
- 1-1/2" rib height
- 24 Tru-Gauge™ steel & .032" aluminum are standard and attached with high-performance concealed clips (some profiles *may* be available with an integrated screw flange option -- *please inquire*)
- Screw flange is not available in heavier gauges:
 - 22 Tru-Gauge™ steel and .040" aluminum
 - Custom 20 & 18 Tru-Gauge™ steel and .050" & .063" aluminum
- Aluminum is recommended within 1000 ft of salt water (*not required*)
- 3' to 32'9" panel lengths (*Inquire for longer or shorter lengths*)
- Seamless runs, fewer runs and less labor
- Custom profiles available
- Vertical or horizontal wall application
- Acceptable for use as a soffit panel
- Interchangeable panel widths and configurations
- Perforated options available (*please inquire*)

TESTING

-  ICC-ESR #5045 with CBC-CRC Supplement
- ASTM A653/A924 - G-90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume® AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM D6578 - Anti-Graffiti
- ASTM E283 - Air infiltration (wall)
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E1646 - Water infiltration (roof)
- ASTM E1680 - Air infiltration (roof)

WEIGHT CHART

NX-8	WIDTH	24 GA STEEL	22 GA STEEL	20 GA STEEL	18 GA STEEL	.032 ALUM	.040 ALUM	.063 ALUM	.050 ALUM
THICKNESS		0.0236"	0.0285"	0.0356"	0.0466"	0.032"	0.040"	0.063"	0.050"
WEIGHT/LINFT	12"	1.439 LBS	1.671 LBS	2.171 LBS	2.733 LBS	0.682 LBS	0.820 LB	1.291 LBS	1.065 LBS
WEIGHT/LSQFT	12"	1.439 LBS	1.671 LBS	2.171 LBS	2.733 LBS	0.682 LBS	0.820 LB	1.291 LBS	1.065 LBS

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
12 PSF<0.01 CFM/ft²-PASS	20.5 PSF - Pass
Intertek Test Result L5460.01-901-44 R1	Intertek Test Result L5461.01-901-44 R1
STRUCTURAL TESTING ASTM E1592 AND E330	Intertek Test Result M7269.03-301-44 R0

NEGATIVE LOAD CHART WITH CLIP ATTACHMENT

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)								
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Negative Load								
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	1.5'	2'	2.5'	3'	3.5'	4'	4.5'	5'
12	24	50	1.30	0.0255	0.0324	0.0367	0.0495	0.0425	0.0658	200.0	175.8	151.6	127.5	103.3	79.1	55.0		
12	22	50	1.53	0.0325	0.0409	0.0479	0.0616	0.0531	0.0832	212.5	185.4	158.3	131.2	104.1	77.0	50.0		
12	20	33	1.87	0.0480	0.0588	0.0762	0.0851	0.0743	0.1199	212.5	185.4	158.3	131.2	104.1	77.0	50.0		
12	18	33	2.43	0.0700	0.0839	0.1183	0.1180	0.1041	0.1713	212.5	185.4	158.3	131.2	104.1	77.0	50.0		
12	0.032"	19	0.49	0.0940	0.0940	0.1413	0.0940	0.0940	0.2825	175.0	157.5	140.0	122.5	105.0	87.5	70.0		
12	0.040"	19	0.59	0.1160	0.1160	0.1741	0.1160	0.1160	0.3464	175.0	157.5	140.0	122.5	105.0	87.5	70.0		
12	0.050"	19	1.03	0.3270	0.3270	0.6655	0.3270	0.3270	0.3249	190.0	173.8	157.5	141.3	125.0	108.8	92.5	76.3	60.0
12	0.063"	19	1.29	0.4000	0.4000	0.8136	0.4000	0.4000	0.3967	190.0	173.8	157.5	141.3	125.0	108.8	92.5	76.3	60.0


- Theoretical section properties for still panels have been calculated per AISI S100 Specifications for Design of Cold-Formed Steel Structural Members.
- Charted allowable unifrom loads are based on the ultimate uniform load (per ASTM E1592-05 testing) divided by a 2.00 Factor-of-Safety.
- Minimum recommended substrate (structure) recommendations:
 - Open-Framing (i.e. girts) - 16ga (design thickness 0.0566")
 - Plywood/OSB - 15/32" or thicker is recommended to assure an effective degree of fastener thread engagement.
 - METAL DECK - 22ga (design thickness 0.0283")

POSITIVE LOAD CHART WITH CLIP ATTACHMENT

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)									
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Positive Load									
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
12	24	50	1.40	0.0255	0.0324	0.0367	0.0495	0.0425	0.0658	358.2	179.1	101.9	57.3	36.7	25.5	18.7	14.3	11.3	
12	22	50	1.65	0.0325	0.0409	0.0479	0.0616	0.0531	0.0832	492.7	246.4	133.1	74.84	47.9	33.26	24.44	18.71	14.8	12.0
12	20	33	1.95	0.0480	0.0588	0.0762	0.0851	0.0743	0.1199	474.6	237.3	141.1	79.4	50.8	35.3	25.92	19.8	15.7	12.7
12	18	33	2.52	0.0700	0.0839	0.1183	0.1180	0.1041	0.1713	779.1	389.6	219.1	123.2	78.87	54.77	40.24	30.81	24.3	19.7
12	0.032"	19	0.68	0.2170	0.2170	0.4403	0.2170	0.2170	0.2147	89.1	44.6	29.7	22.3	17.8	14.9	12.7	10.5		
12	0.040"	19	0.82	0.2670	0.2670	0.5423	0.2670	0.2670	0.2646	139.1	69.6	46.4	34.8	27.8	23.2	19.9	16.2	12.8	10.4
12	0.050"	19	1.03	0.3270	0.3270	0.6655	0.3270	0.3270	0.3249	217.3	108.6	72.4	54.3	43.5	36.2	21.0	25.4	20.1	16.2
12	0.063"	19	1.29	0.4000	0.4000	0.8136	0.4000	0.4000	0.3967	345.5	172.7	115.2	86.4	69.1	57.6	47.6	36.5	28.8	23.3

- Theoretical section properties for Steel panels have been calculated per 2020 AISI S100 North America Specifications for the Design of Cold-Formed Steel Structural Member.
- Allowable loads for Steel panels are calculated in accordance with 2020 AISI S100 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
- The NX-8 panel when installed as a three-span condition with spans of 8ft. on-center for steel and 4ft. on-center for aluminum are capable of withstanding the minimum uniform distributed load of 20psf (0.958 kPa) noted in table 1607.1 of the IBC and a minimum concentrated load of 300 lbf (1.33 kN)

PANEL ATTACHMENT

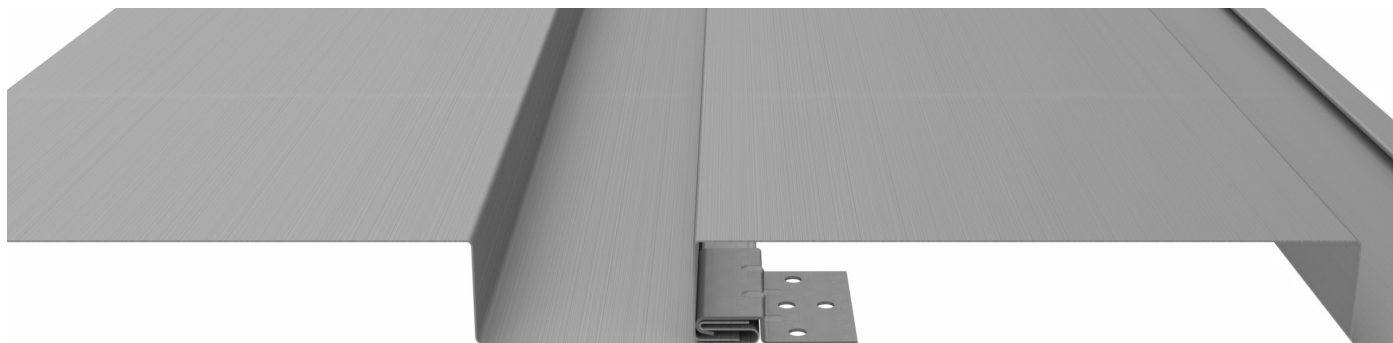

Fastener Notes:

- When possible, lap panels away from prevailing wind direction.
- 15/32" OSB: #10 Burr Buster fasteners.
- 15/32" Plywood: #10 GP Fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- Dimensional lumber: #10 GP. Screws should penetrate the lumber 1".
- 16ga (or less) Steel furring: #10 or #12 Fastener with DP-1
- All trim screws used for roof or wall applications should have EPDM sealing washers.

Rev. Date 08-26