



STRIATIONS

Clip-Lock 100: 13" or 17" Coverage
Clip-Lock 150: 15½" Coverage




CLIP RELIEF

Clip-Lock 100: 13" or 17" Coverage
Clip-Lock 150: 15½" Coverage




FLAT

Clip-Lock 100: 13" or 17" Coverage
Clip-Lock 150: 15½" Coverage





ACCENT RIBS

Clip-Lock 100: 13" or 17" Coverage
Clip-Lock 150: 15½" Coverage




2 Ribs available

PANEL CLIPS

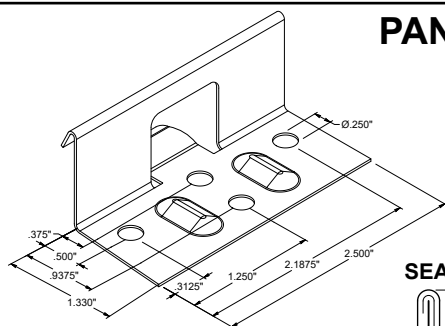

SEAM DETAIL



Clip spacing

Panel clip spacing is based on structural design loads, engineered spanning capability of the panels and substrate.

Fasteners

All fasteners going into steel or plywood must extend at least 3 full threads beyond the material. When attaching to dimensional lumber, 1" embedment is required.

STANDARD CLIP: for US rated and engineered solid deck applications. Accommodates for unlimited thermal movement in both directions. Clips are fabricated from Grade 50 G90 base steel, 18 ga.

The Clip-Lock™ Standing Seam delivers a panel with strong clean continuous grace, together with unequalled quality. This provides you a weather tight roof to last a lifetime. Clip system allows for extremely long panels, without the need for laps.

KEY FEATURES

- Standard width for Clip-Lock 100 are 13" or 17"
Standard width for Clip-Lock 150 is 15.5"
(Please inquire for other coverage options)
- 24 and 22 gauge steel and .032" and .040" Aluminum
- Factory notched & tabbed panels available
- Clip system: allows for expansion/contraction of panels in longer lengths
- Clip-Lock 100 – 1" rib height
- Clip-Lock 150 – 1-1/2" rib height
- Concealed fastener system
- 3:12 minimum pitch recommended
(For lower pitches, please inquire)
- Standard panel lengths 3' to 50'
(For longer panels, please inquire)
- Panel options: Striations, Accent Ribs, and Flat Pan
- Manufactured in Sacramento and Riverside, CA

TESTING

-  Code compliance UL Evaluation Report
UL ER #25913-01 (1-1/2" Only)
- UL Construction No. 589 (1-1/2" Only)
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available

WEIGHT CHART

Clip-Lock	WIDTH	24 GA STEEL	22 GA STEEL	.032" ALUM	.040" ALUM
THICKNESS		0.0236"	0.0285	0.032"	0.040"
WEIGHT/LINFT	13" (1" seam)	1.285 LBS	1.552 LBS	0.609 LBS	0.761 LBS
WEIGHT/SQFT	13" (1" seam)	1.186 LBS	1.432 LBS	0.562 LBS	0.702 LBS
WEIGHT/LINFT	15-1/2" (1 1/2" seam)	1.617 LBS	1.952 LBS	0.766 LBS	0.958 LBS
WEIGHT/SQFT	15-1/2" (1 1/2" seam)	1.252 LBS	1.512 LBS	0.593 LBS	0.741 LBS
WEIGHT/LINFT	17" (1" seam)	1.606 LBS	1.939 LBS	0.761 LBS	0.951 LBS
WEIGHT/SQFT	17" (1" seam)	1.133 LBS	1.500 LBS	0.537 LBS	0.671 LBS