




STRIATIONS




CLIP RELIEF



FLAT




ACCENT RIBS



3 Accent ribs for 12" panel
4 Accent ribs for 16" panel
(16" panel shown)

LOCK SEAM DETAIL

REVERSE LAP DETAIL

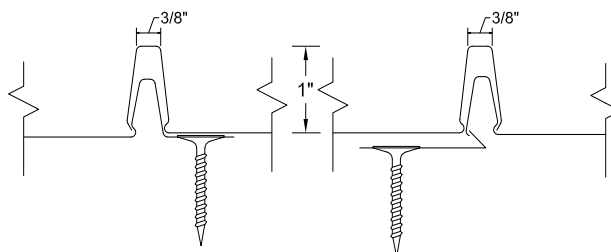

KEY FEATURES

- 12" and 16" coverage options
- 26, 24 & 22 Tru-Gauge™ and .032" Aluminum
- 16 & 20 oz. Copper (*Please inquire*)
- Factory-notched and tabbed panels available
- Vertical interlocking application: allows installation from both directions starting at any location
- Patented no-siphon lock seam
- 1" vertical rib with 3/8" flat top for ease of flashing attachment
- Concealed fasteners: fasteners cannot leak
- Pre-slotted fastener flange: allows expansion & contraction of panel (high wind clips available for panel lengths over 35')
- 3:12 minimum pitch recommended (*For lower pitches, please inquire*)
- Standard panel lengths 4' to 35' - not notched
Standard panel lengths 1' to 35' - notched (*For longer panels, please inquire*)
- Manufactured in Salem OR, and Sacramento CA

TESTING

-  Code compliance UL Evaluation Report
UL ER #25913-01
- UL Construction No. 529
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available

WEIGHT TABLE

EASY-LOCK	WIDTH	26 GA STEEL	24 GA STEEL	22 GA STEEL	.032" ALUM	.040" ALUM
THICKNESS		0.019"	0.0236"	0.0285	0.032"	0.040"
WEIGHT/LINFT	12"	1.106 LBS	1.305 LBS	1.576 LBS	0.618 LBS	0.760 LBS
WEIGHT/SQFT	12"	1.106 LBS	1.305 LBS	1.576 LBS	0.618 LBS	0.760 LBS
WEIGHT/LINFT	16"	1.378 LBS	1.626 LBS	1.963 LBS	0.770 LBS	0.950 LBS
WEIGHT/SQFT	16"	1.033 LBS	1.219 LBS	1.472 LBS	0.578 LBS	0.713 LBS