



MS-100™ & MS-150™

Installation Guide - WeatherTight Warranty Details

(*Note: MS-100™ does not qualify for WeatherTight Warranties)




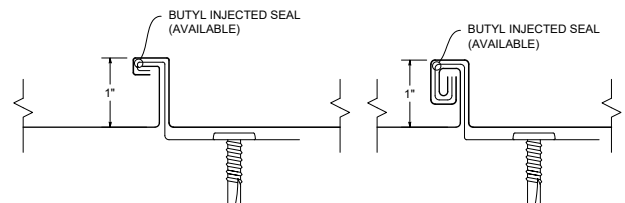


Table of Contents


Panel Specifications	2-5
Taylor Delivery Fleet	6
Delivery & Will Call/Loading	7
Notes To Designer/Installer	8-10
Standard Eave	11
Hook Eave	12
Gutter/Hook Eave	13
Standard Ridge	14
Vented Ridge	15
End Dam	16
Valley	17
Valley – Low Pitch	18
Standard Gable	19
Alternate Gable	20
Sidewall	21
Peak Flashing (R.E.C.)	22
Vented Peak Flashing (V.R.E.C.)	23
Pitch Change	24
Endwall	25
Vented Endwall	26
Curb Back Pan/Cricket Isometric Details	27-29
Curb Sidewall	30
Curb Endwall	31
Curb Back Pan/Cricket	32-33
Eave to Gable Transition	34-36
Pipe Penetration – on Plate	37
Pipe Penetration – on Rib	38-39
Pipe Penetration – on Pan	40
Flashing Selection	41-44

13", 17" & 21" coverage options
(other widths inquire)

PANEL PROFILES

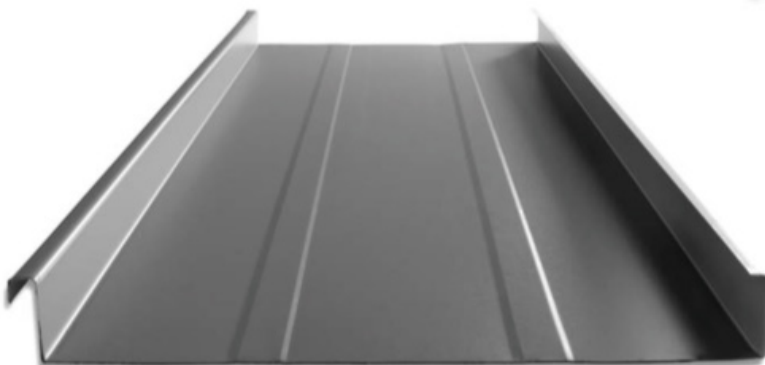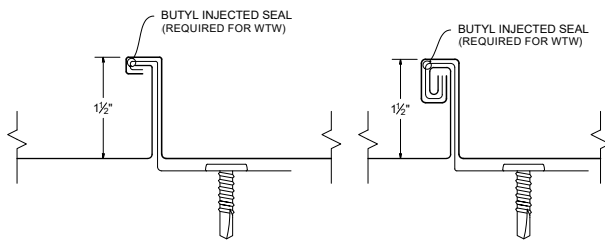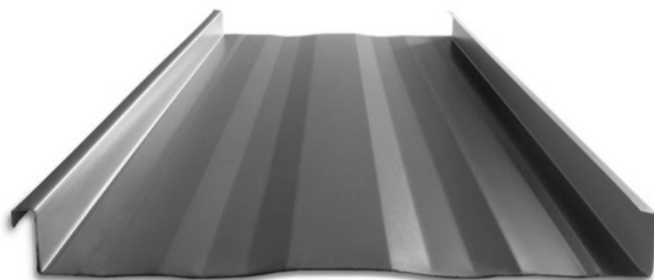


STRIATIONS

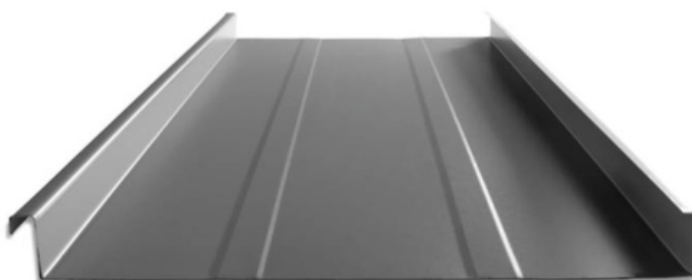


ACCENT RIBS

2 Accent ribs for 13" panels (Salem & Riverside)
3 Accent ribs for 17" & 21" panels
2 Accent ribs for all panels (Sacramento)

90° SEAM DETAIL



180° SEAM DETAIL

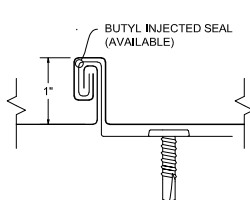

KEY FEATURES

- 13", 17" & 21" coverage options (*other widths inquire*)
- 24 & 22 Tru-Gauge™ and .032" Aluminum
- 16 & 20 oz. Copper (*Please inquire*)
- Zinc Coil (*inquire for thicknesses*)
- Floating clip system: allows for expansion/contraction of panels in longer lengths
- 1" vertical rib
- Factory injected Butyl sealant
- Clip Relief is not standard, available upon request
- Concealed fasteners: fasteners cannot leak
- 1:12 minimum pitch recommended (*For lower pitches, please inquire*)
- Standard panel lengths 3' to 60' - notched
Standard panel lengths 1' to 60' - not notched (*For longer panels, please inquire*)
- Onsite roll forming available
- Panel options: Striations, Accent Ribs, and Flat Pan
- Manufactured in Salem, OR and Riverside, CA

TESTING

-  Code compliance UL Evaluation Report
UL ER #25913-01
- UL Construction No. 575 & 602
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zinalume/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available




The MS-100™ is a mechanically seamed roof that is perfect for high wind areas and snow country. The butyl injected seam prevents water from entering the system, giving you a worry free roof for a lifetime.

MATERIAL SPECIFICATIONS

- 26 gauge Kynar 500® Painted Steel
.019" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 24 gauge Kynar 500® Painted Steel
.0236" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 26, 24 & 22 gauge bare Zincolume® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- ▲ 22 gauge Kynar 500® Painted Steel
.029" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- ♦ .032" Kynar 500® Painted Aluminum
- 16 and 20 ounce Copper
(Please inquire)
- Kynar 500® and substrate testing data available
(See website)
- "Oil canning" is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection


KEY FEATURES

- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Materials
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two-coat, 70% resin finish, applied at a 1 mil. thickness
- 40-year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications

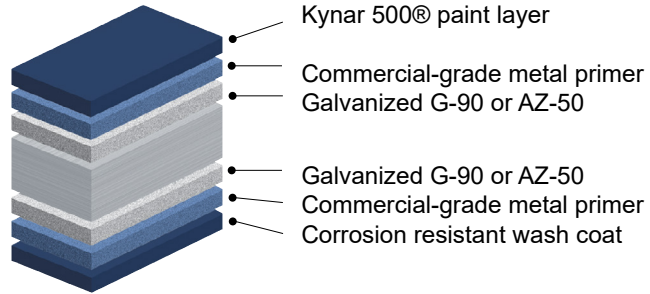


40-Year Residential / 20 and 30 Year Commercial Manufacturer's Limited Warranty


STANDARD COOL KYNAR 500® COLORS

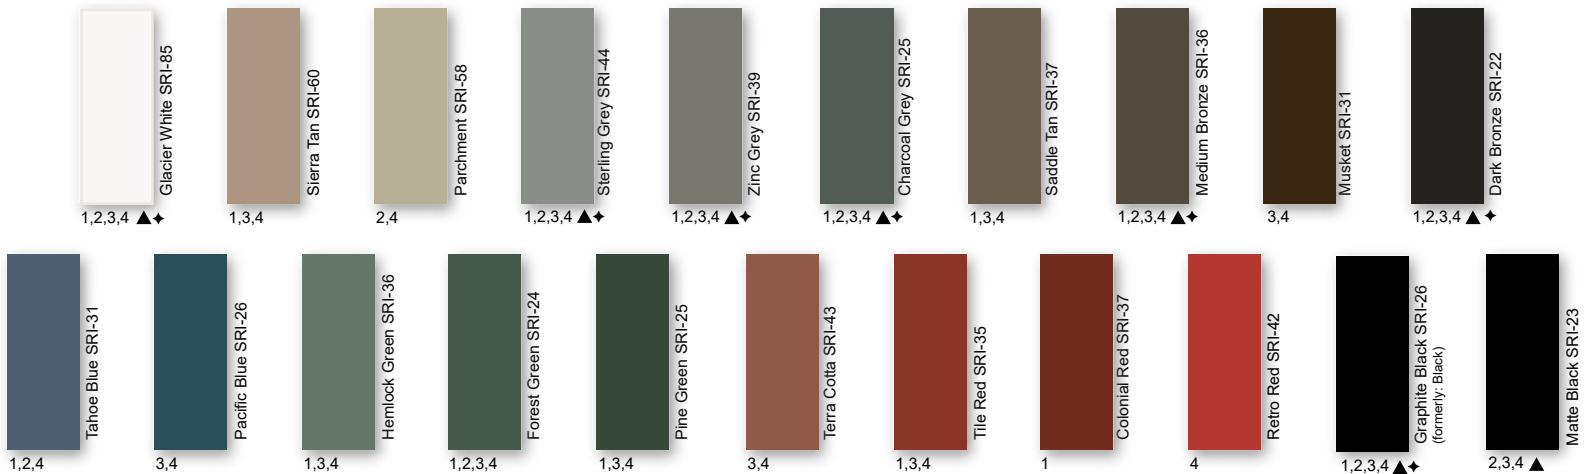

PREMIUM METALLIC COOL KYNAR® COLORS

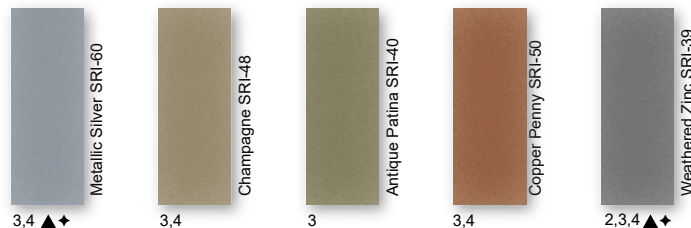

SPECIALIZED MATERIAL

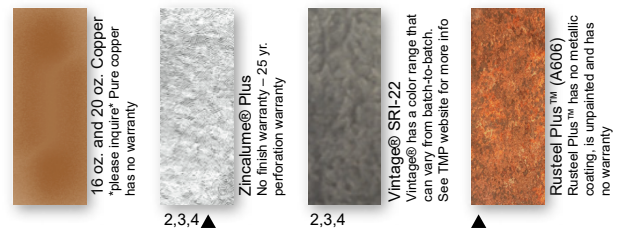

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil canning is not a cause for material rejection***



steelscape



Standard MS100 Panels				
Width	Gauge	Color	LBS SQFT	LBS LF
13.75"	26	1	0.98	1.14
13.75"	24	2	1.15	1.34
17-5/8"	24	3	1.11	1.65
21"	24	4	1.09	1.93
13" and 21"	22	▲	1.37	2.42
Inquire	0.032	♦	0.52	0.81



The MS-150™ is a mechanically seamed roof that is perfect for high wind areas and snow country. The butyl injected seam prevents water from entering the system, giving you a worry free roof for a lifetime.

KEY FEATURES


- 12", 16" & 20" coverage options
- 26, 24 & 22 gauge Tru-Gauge™ and .032" Aluminum
- 16 & 20 oz. Copper (*Please inquire*)
- True Zinc available on special request (*Please inquire*)
- Floating clip system: allows for expansion / contraction of panels in longer lengths
- 1-1/2" vertical rib
- Factory injected Butyl sealant
- Concealed fasteners: fasteners cannot leak
- Manufactured in Riverside CA, Sacramento CA & Salem, OR
- ICC-ESR #5046 with CBC-CRC Supplement
-  - Code compliance UL Evaluation Report UL ER 25913-01
- UL 580 Class 90 Wind Uplift, UL 790 Class A Fire rated and UL 2218 Class 4 Impact (hail) rated
- UL Construction No. 554
- ASTM E283 - Air infiltration (walls)
- ASTM E331 - Water infiltration (walls)
- ASTM E1592 - Structural uniform static air pressure
- ASTM E1646 - Water infiltration (roof)
- ASTM E1680 - Air infiltration (roof)
- ASTM E2140 - Water test for full immersion hydrostatic roof systems
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available
- Weather tightness warranty available: 5 to 30 Year Prorated or NDL (*Contact TMP representative for details*)
- 1:12 minimum pitch recommended (*For lower pitches, please inquire*)
- Standard panel lengths 3' to 60' - notched
- Standard panel lengths 1' to 60' - not notched (*For longer panels, please inquire*)
- On-site roll forming available
- Panel options: Striations, Accent Ribs, and Flat Pan
- Retro-fit systems available

PANEL PROFILES




ICC-ESR #5046

12" to 20" coverage options

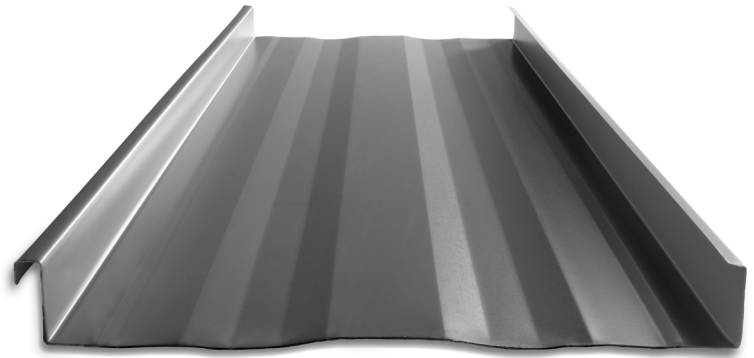


STRIATIONS

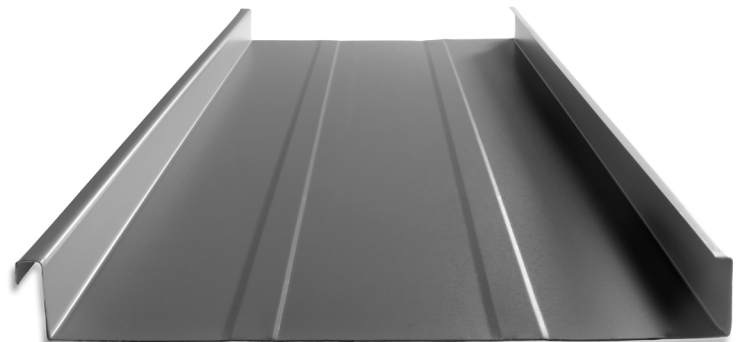


ACCENT RIBS 2 Accent ribs for 12-3/4" panel
3 Accent ribs for 16-5/8" & 20" panel

90° SEAM DETAIL



180° SEAM DETAIL




180 degree seams are not considered an architectural detail. The detail improves the weather tightness and wind uplift capabilities of the panel system, but will show stress and waviness in the seam. The detail is recommended for slopes less than 2:12, roof areas not easily viewed from the ground, and for high wind areas. For additional information, contact a TMP representative and DI Seamers for support and information about the proper use of seaming tools.

MATERIAL SPECIFICATIONS

- 26 gauge Kynar 500® Painted Steel
.019" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 24 gauge Kynar 500® Painted Steel
.0236" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- 26, 24 & 22 gauge bare Zincolume® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- ▲ 22 gauge Kynar 500® Painted Steel
.029" (Thickness prior to painting)
G-90 Galvanized or AZ-50
- ♦ .032" Kynar 500® Painted Aluminum
- 16 and 20 ounce Copper
(Please inquire)
- Kynar 500® and substrate testing data available
(See website)
- "Oil Canning" is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection


KEY FEATURES

- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Materials
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications

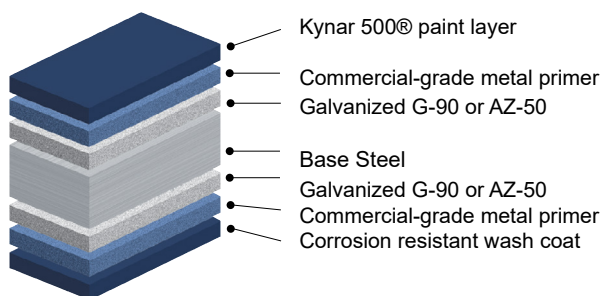


40-Year Residential / 20 and 30 Year Commercial Manufacturer's Limited Warranty


STANDARD COOL KYNAR 500® COLORS

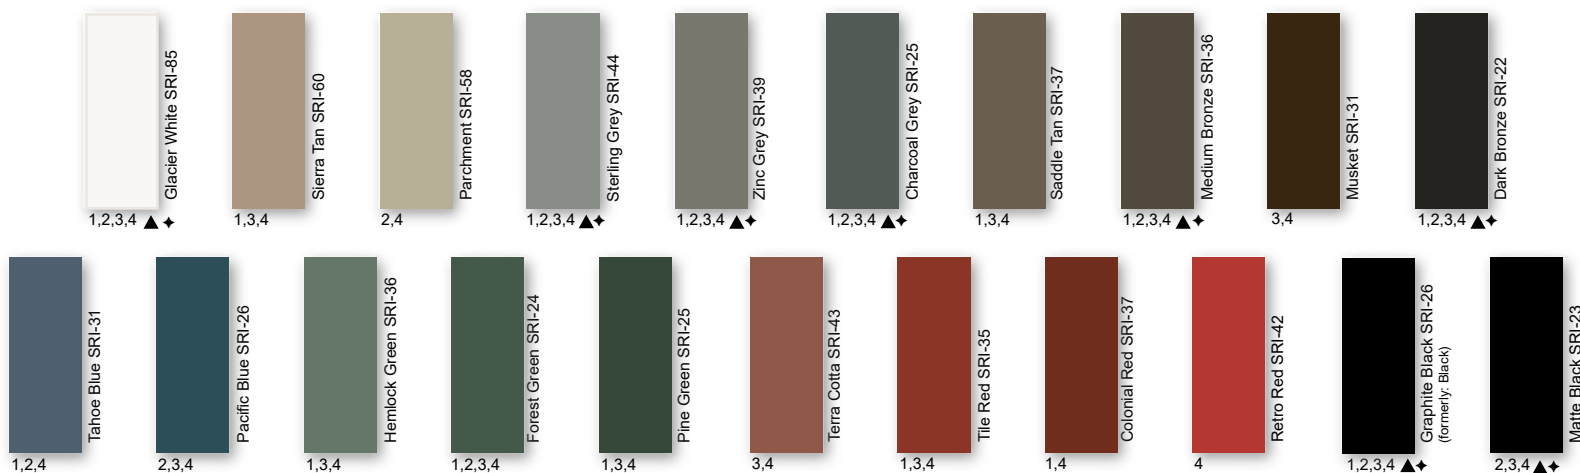

PREMIUM METALLIC COOL KYNAR® COLORS

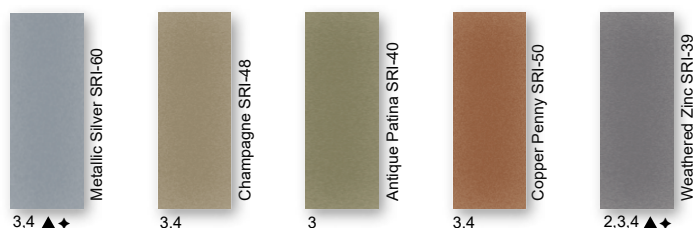

SPECIALIZED MATERIAL

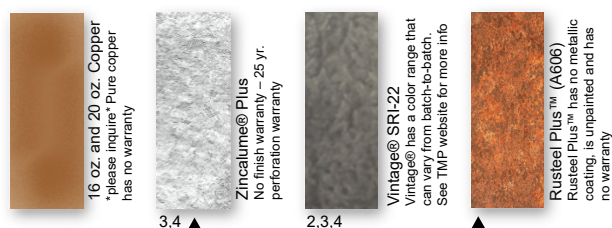

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing. ***Oil canning is not a cause for material rejection***

Standard Panels				
Width	Gauge	Color	LBS SQFT	LBS LF
12-3/4"	26	1	1.05	1.14
12-3/4"	24	2	1.24	1.34
16-5/8"	24	3	1.18	1.65
20"	24	4	1.14	1.93
12"	22	▲	1.58	1.61
20"	22	▲	1.43	2.42
16-5/8"	0.032	♦	0.55	0.81



Taylor Delivery Fleet



Delivery Fleet

Taylor Metal Products prides itself with quick lead times delivered with our fleet of semi trucks. Our fleet of trucks are owned and operated by TMP. All of our drivers are Taylor Metal Products employees, so when your truck rolls in to deliver, you are dealing with Taylor Metal Products.

Expect consistent and exceptional service with short lead times. The inhouse fleet allows for efficient and cost-effective delivery.



Mounted on the rear of our semitrailer, the truck-mounted "piggy-back" forklift will accompany you right to your place of use, opening up unprecedented possibilities in terms of transportation. It can travel sideways, carrying panels up to 40' long, allowing delivery in locations that would typically be considered impossible to reach.

Save time and effort while avoiding potential loading and transport issues; have experienced TMP personnel deliver and unload your order.



Delivery

We will make every attempt to deliver material to the desired location. We may be unable to gain access on tight corners or steep terrain. If the site is deemed inaccessible by our driver, the customer may choose an alternate delivery site within a reasonable proximity. If we are unable to make the alternate delivery, additional charges may be assessed.

The customer is responsible for:

- Determining adequate access for delivery ahead of time.
- Meeting the delivery at the agreed upon time.
- Providing adequate resources (1-4 people as needed) for off loading materials.
- A charge of \$100 per hour may be added for deliveries that go beyond their allotted time
- Check the shipment at the time of delivery.
- Verify material quantities against the shipping/packing list.
- Note any damage or discrepancies upon the paper work at the time of delivery and notify Taylor Metal Products within 48 hours of delivery.

Delivery times are usually scheduled one day in advance. Taylor Metal Products will make every effort to make the delivery at the scheduled time. Please be aware that there may be conditions beyond our control such as traffic, mechanical failures, road closures, etc. which may affect our schedule.

Will Call/Loading

Flatbed trailers and trucks are best suited to transport metal roofing materials. These can be loaded from the side with a forklift and tied down in a safe and secure manner.

We are not able to load materials onto vehicles and/or trailers which are not suitable or may be hazardous to load. Please be aware that if we find a vehicle to be inappropriate, we reserve the right to refuse to load your order.

Unacceptable examples include: boat trailers, vans, buses, motor homes, campers and box trailers. Pickup racks which do not have sufficient supports for the weight or are not long enough to support bundles are also unacceptable.

Taylor Metal Products is not responsible to tie down loads nor do we provide any tie down materials. Please bring tie downs to secure your load (string or twine are **not** acceptable for this purpose).

Consider having your order delivered on one of our trucks with a piggy back forklift.



Notes to Designer/Installer

Taylor Metal Products is providing the following details as an aid in design. The details in this guide are not inclusive to all design situations. The designer/installer is responsible for modifications and should take into consideration all aspects of the project including climate conditions, such as, snow and wind, as well as, building code requirements, building design, building usage and maintenance requirements.

Installation should be performed only by qualified installers familiar with metal roofing systems and industry standards. For details not shown in this guide, refer to the Sheet Metal and Air Conditioning Contractors National Association (SMACNA) architectural sheet metal manual for proper design. For manufacturer's weather tightness warranties – all details must be preapproved by Taylor Metal Products technical representative.

The Standard gauge for all products in this guide is 24 gauge and the standard finish is Kynar 500®. We recommend specifying all flashings be the same gauge, color, and finish as the panels to ensure long-term durability and color match.

Substrates

Details in the manual are all shown over solid substrate. **MS-100™/MS-150™** can be used over spaced purlins. For solid substrate, **Taylor Metal Products** recommends 15/32" plywood or 22 ga. metal decking. Contact a TMP representative with questions about panel attachment to varying substrates.

Underlayment

For roofs with pitches below 3:12, High Temp Ice and Water shield underlayment must be installed across the entire surface (projects with manufacturer's weathertightness warranties require the TMP private label product). For pitches steeper than (or equal to) 3:12, High Temp Ice and Water is necessary at all perimeter locations, eave, ridge, valley, hips, sidewall, endwall, prow and penetrations. The remaining of the roof's field areas can then be covered with approved synthetic felt. If local codes or specifications require a Class A fire rated assembly, Polystick XFR or Titanium FR (both products are distributed by TMP) must be installed over the entire roof with combustible decks.

Follow manufactures instructions carefully for all underlayment installation.

Drag Load Requirements

All panels must be pinned at one end to resist the drag load caused by snow loads, live loads, and the weight of the panel. Drag load is a function of roof slope, actual load and length of panels. Contact **Taylor Metal Products** for specific drag load requirements.

Ventilation/Insulation

It is the responsibility of the designer to determine the material types needed to control condensation and to insulate and ventilate the roof system. Applications over rigid insulation may require blocking for solid attachment and framing the perimeter for installation of perimeter flashings.

Oil Canning

Flat metal surfaces will display waviness commonly referred to as “oil canning.” Oil canning is caused by a variety of conditions. Steel mill tolerances, variations in or uneven substrates and roofing underlayments. Oil canning is a characteristic of metal roofing, not a defect and is not a cause for rejection. **Taylor Metal Products** offers **MS100™/MS150™** with striations or accent ribs to help minimize oil canning.

Thermal Movement

The Panels and the flashings must be allowed to expand and contract, especially with longer length panels. The panel may need to have a slight gap where the panel hooks the offset cleat to allow for thermal movement of the panels.

Snow Design

The following details do not address all conditions for snow environments. Consult with the designers, engineers, and others for acceptable details to accommodate your project and climate conditions. When possible gutters, valleys, pitch changes or other penetrations should be minimized in snow areas.

All roof penetrations should be located as close to the ridge or “pin point” top of roof. Snow country requires special designs for valleys to accommodate accumulation of snow and ice from uphill panels. Roof design should be considered in snow areas. Roof design should help resist the melting and freezing of snow and ice.

A fit for purpose roof design has the greatest impact on maintaining a damage free roof system in snow areas. Please contact a **Taylor Metal Products** representative for assistance in detail designs and appropriate panel selection for specific climate and building conditions.

Handling / Storage & Safety

Handle materials with care when off-loading or moving materials to avoid damage to panels or flashings. Long panels may require two or more pick-up points, properly spaced to avoid damaging panels. Plan ahead; contact **Taylor Metal Products** for recommendations on handling/hoisting long panels.

Store the panels, flashings and accessories in a dry, well ventilated area, off the ground. If covering, allow ventilation around panels. Elevate one end of bundle to allow drainage of wet materials.

Wear clean, soft-soled shoes when walking on roofing panels to avoid damage to the painted finish.

Take care that sand, gravel, dirt, etc. sticking to your shoes is not carried onto the roof, scratching or otherwise damaging the finish on the roofing material. Walking on asphalt impregnated felt paper, especially on a hot day, can cause the asphalt to stick to your shoes and be tracked on to the roofing material.

Take care when painting to avoid getting over spray on the roofing material. Remember that wind can carry paint particles some distance. Over spray can cause the finish of the roofing material to look dull and may void your warranty.

Secure materials, especially when leaving the site, on the ground or roof to prevent winds from moving the materials. Wind-blown materials may cause damage to the material, property or persons.

Always use proper safety equipment and attire to minimize risk of cuts or other injuries.

Do not walk on panels that have not been completely installed.


Do not walk on major ribs of panels.

Metal roofs that are wet or dusty can be extremely slippery. Wear soft soled shoes and a safety harness to minimize risk of falling.


Avoid installing metal panels in windy conditions.

Safety considerations are the responsibility of the installer and his crew. Be sure to **use common sense** and generally accepted safety practices when installing roofing materials.



STANDARD EAVE DETAIL

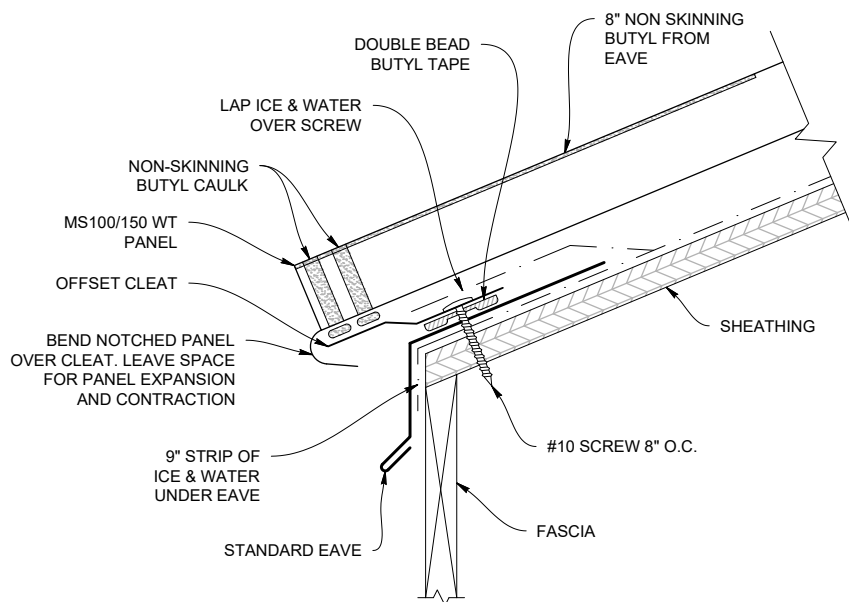

STANDARD EAVE (MS100ES / MS150ES)




OFFSET CLEAT (MS100OC / MS150OC)

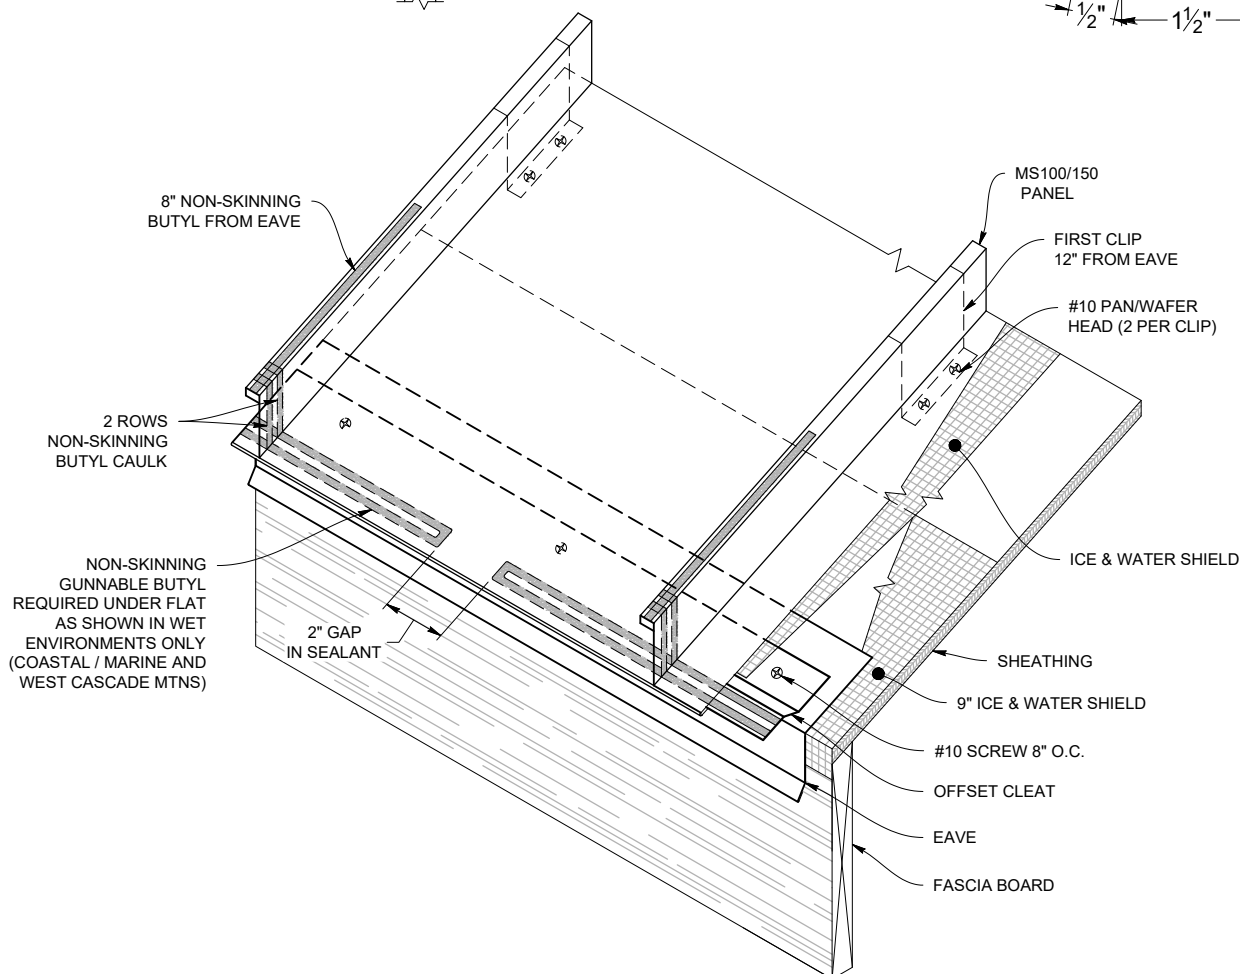



Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Hook Eave

HOOK EAVE DETAIL

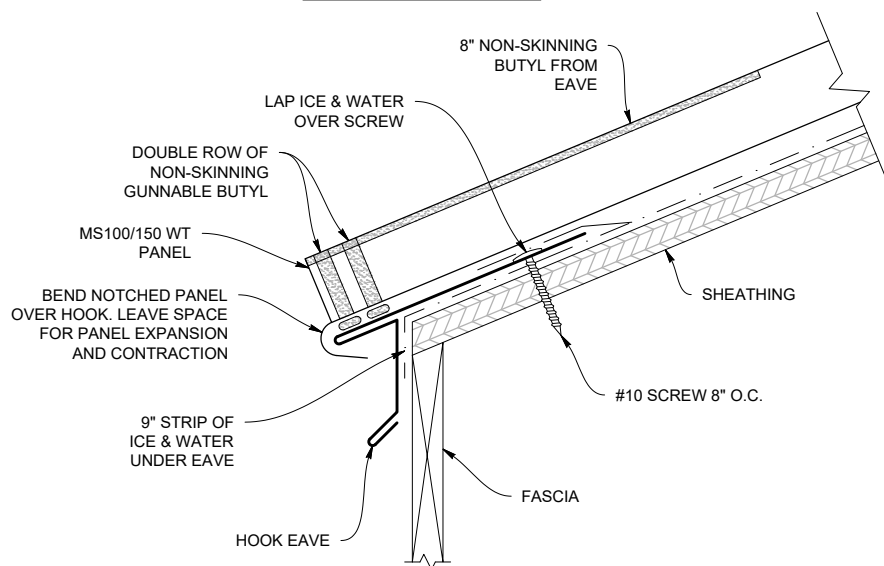


HOOK EAVE (MS100EH / MS150EH)

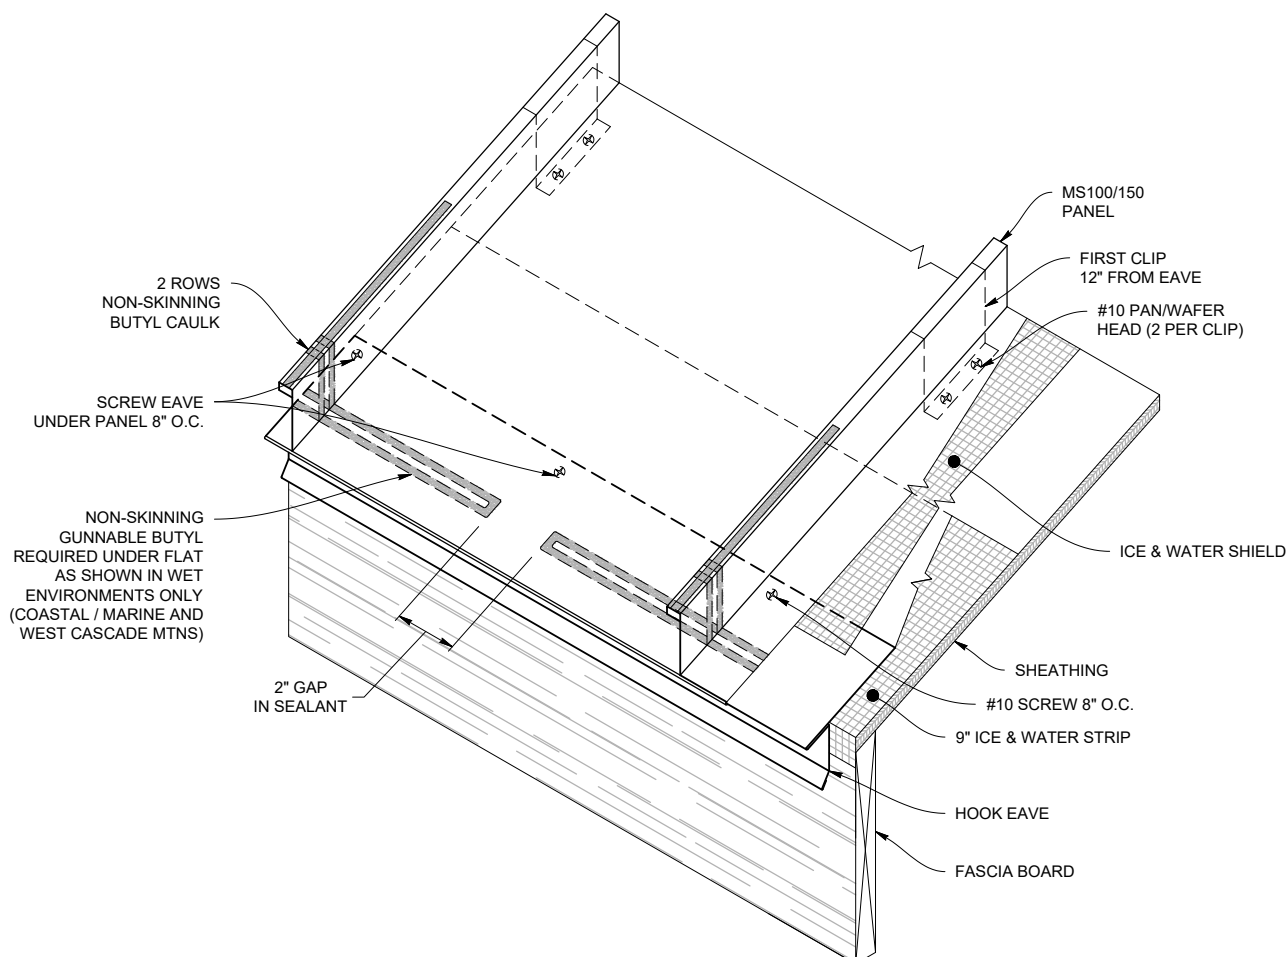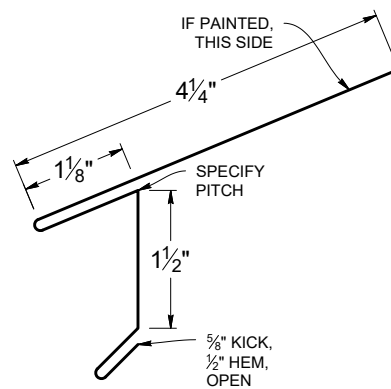


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.


BOX GUTTER
(MS10065BG / MS15065BG)



HOOK EAVE
(MS100EH / MS150EH)




BOX GUTTER HANGER
(AGH6)

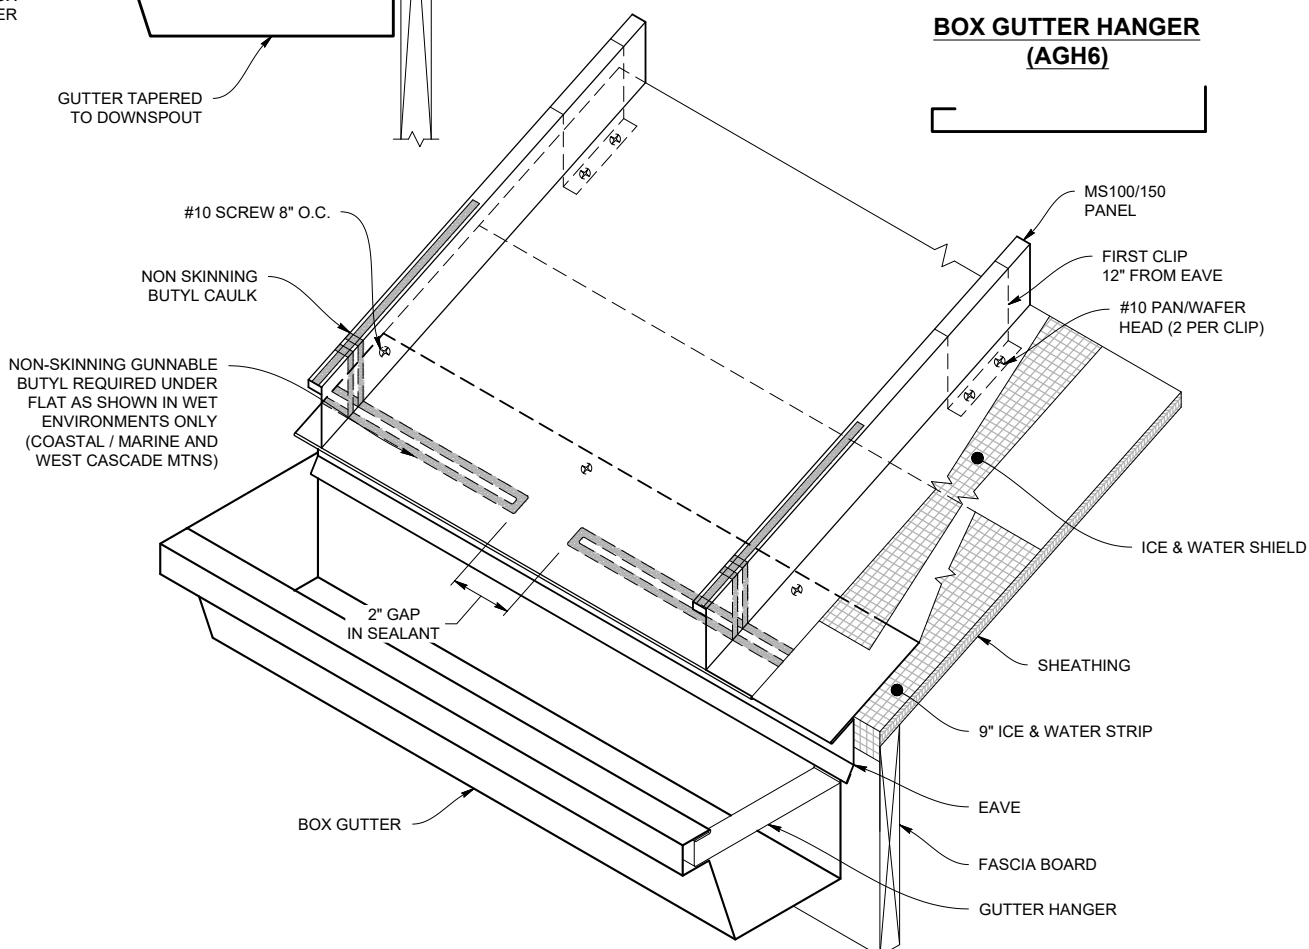


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Standard Ridge


STANDARD RIDGE DETAIL

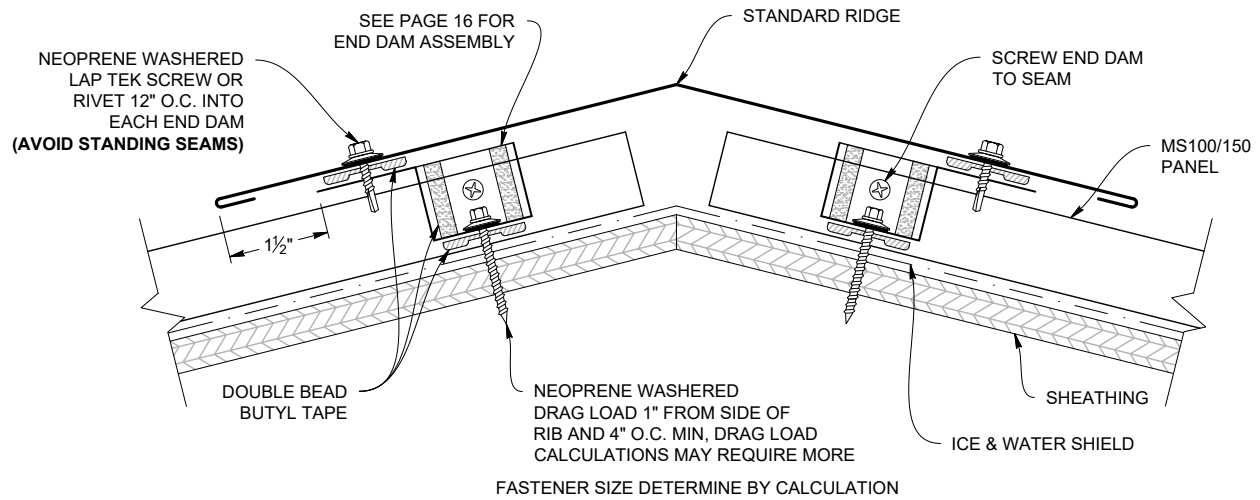

STANDARD RIDGE (MS100RS / MS150RS)

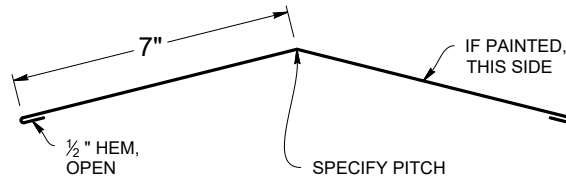


STANDARD RIDGE LAP

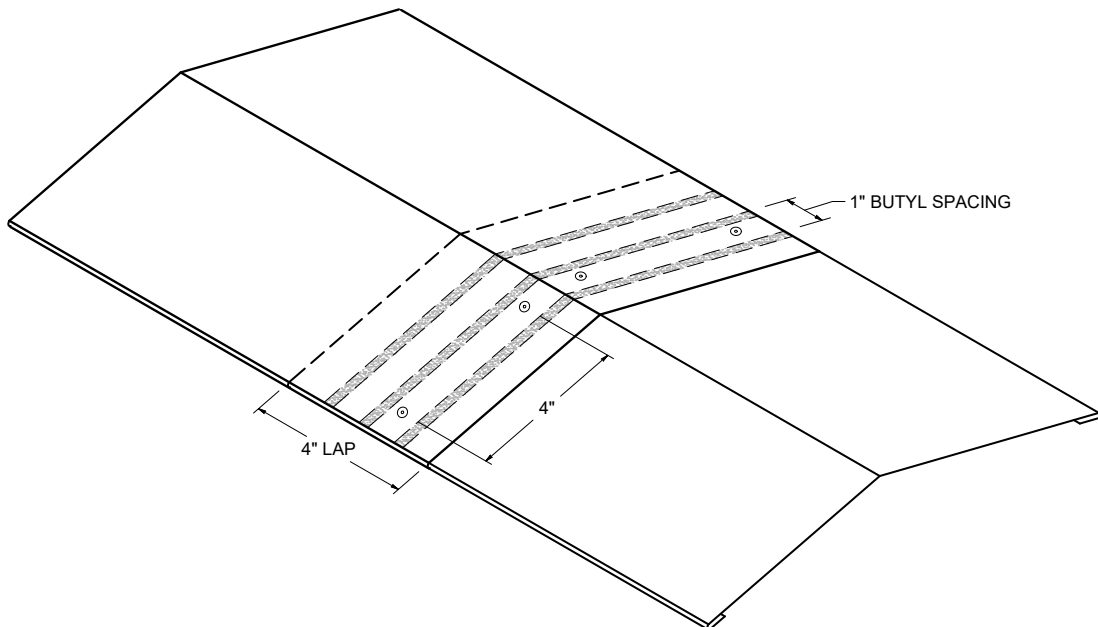


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.


WT VENTED RIDGE DETAIL

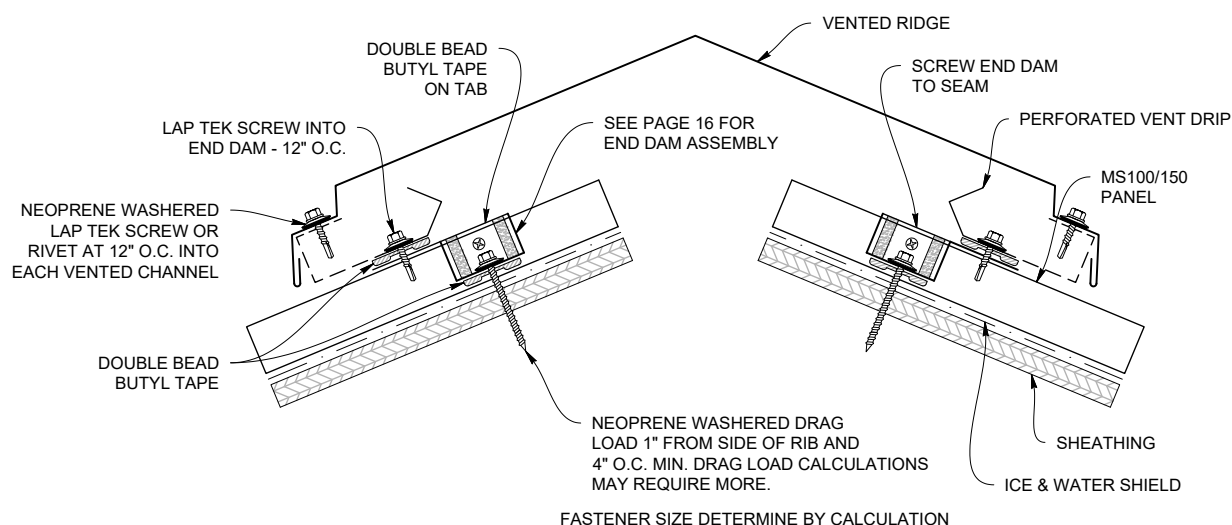

WT RIDGE VENTED (MS100WTRFV / MS150WTRFV)

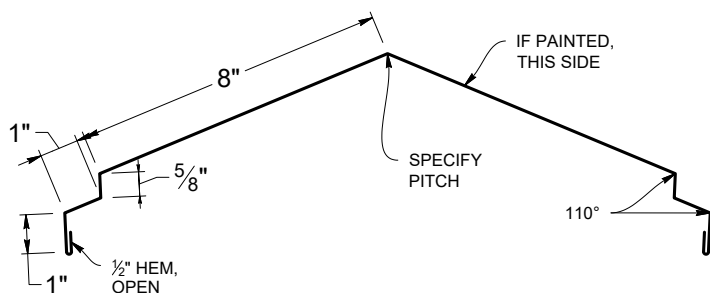


PERFORATED VENT DRIP: E2886 EMBER RESISTANT (MS100PVD / MS150PVD)

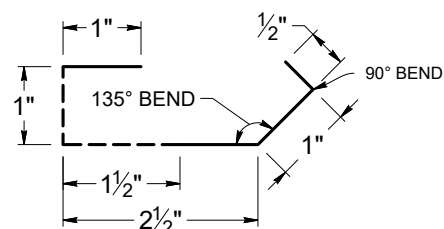




****NOTE: PERFORATED VENT DRIP IS COMPATIBLE WITH WT VENTED RIDGE ONLY****

VENTED RIDGE LAP

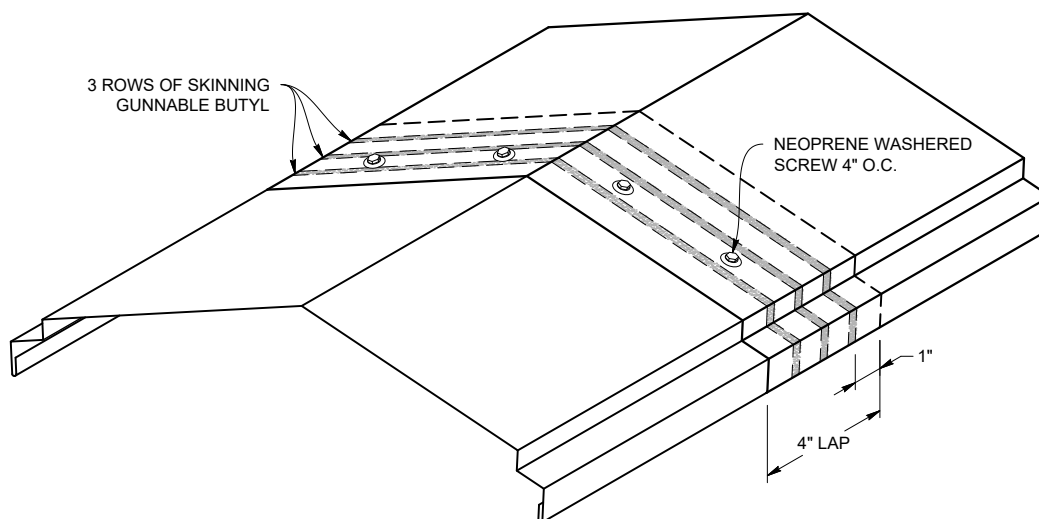

Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

End Dam

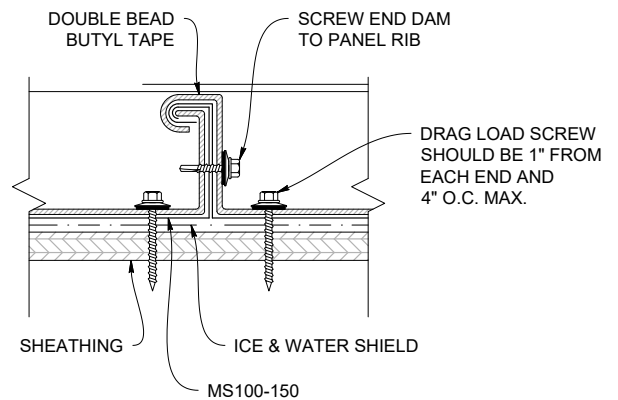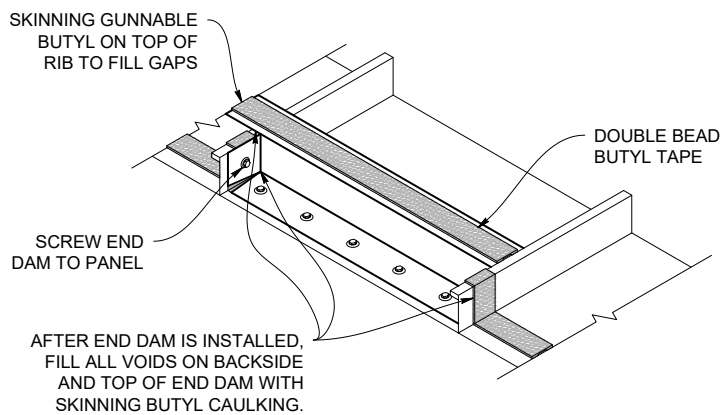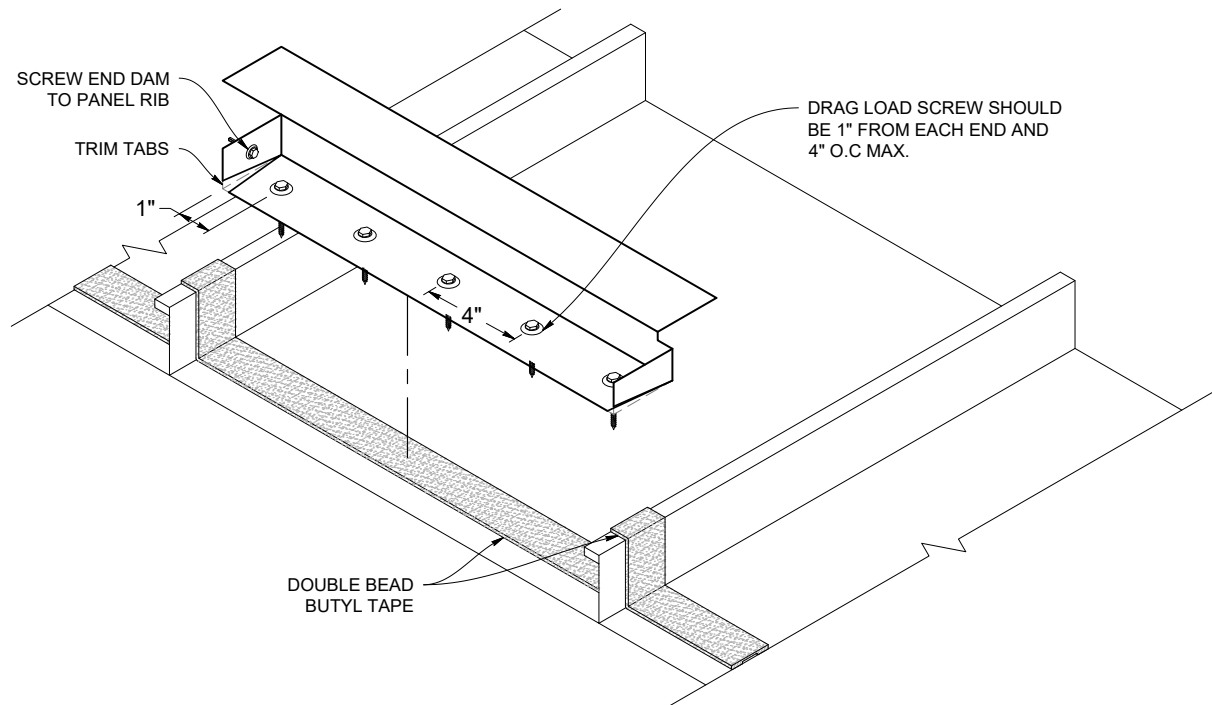


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.


Valley Flashing

Slope 3:12 or Greater


VALLEY 24" FLASHING (MS100VF / MS150VF)

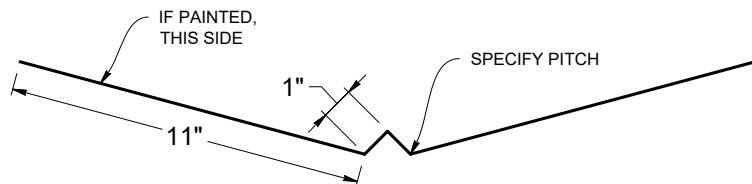


OFFSET CLEAT (MS100OC / MS150OC)



VALLEY 24" DETAIL (3:12 Or Greater Pitch)

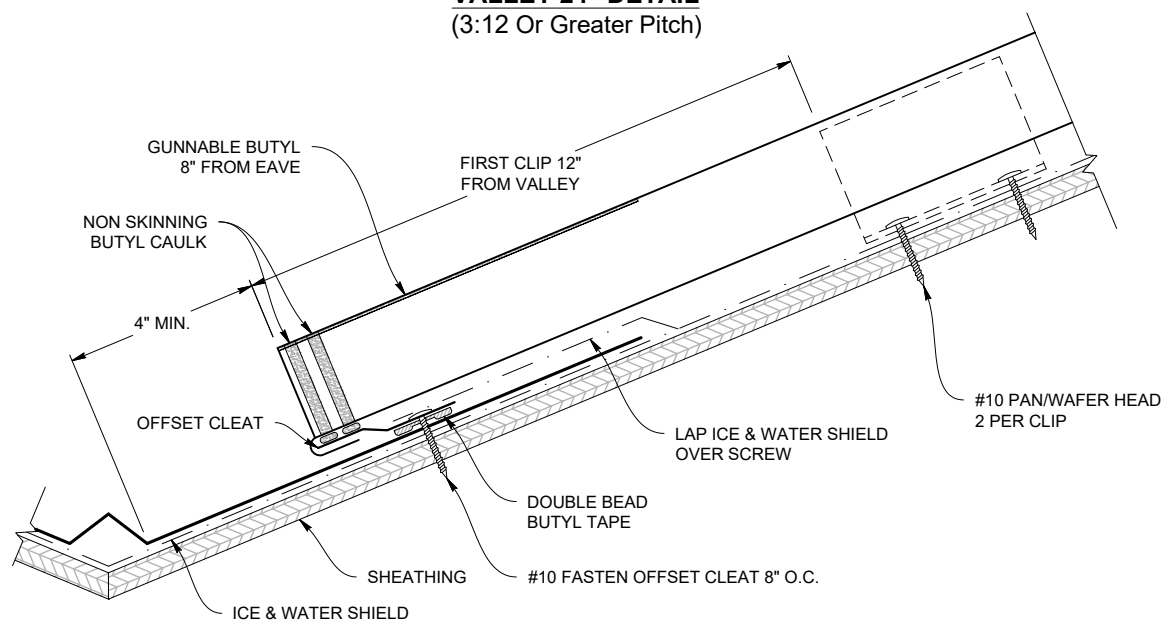

VALLEY LAP (3:12 Or Greater Pitch)

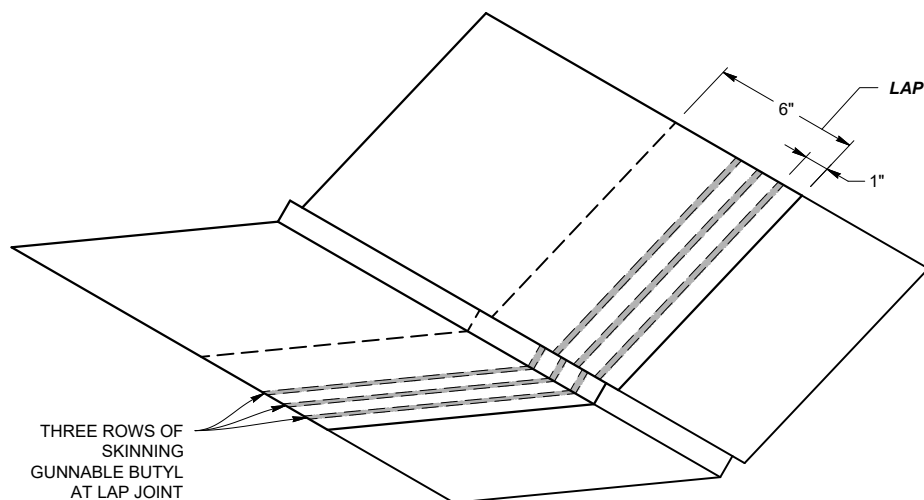


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Valley Flashing - Low Slope


Slope Less than 3:12




LOW SLOPE VALLEY DETAIL (Less Than 3:12 Pitch)

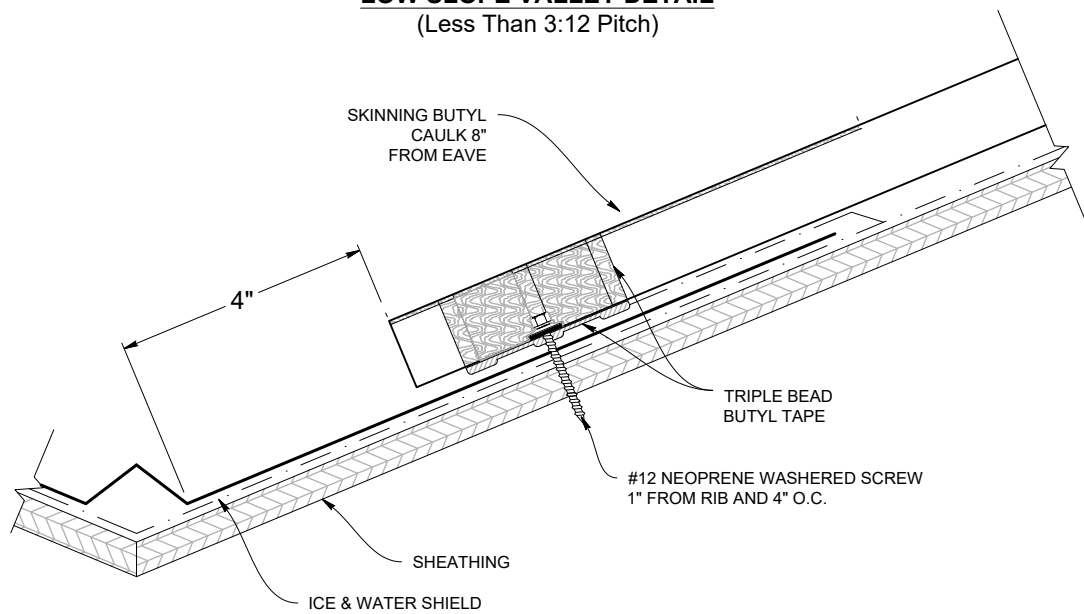

VALLEY FLASHING (MS100VF / MS150VF)

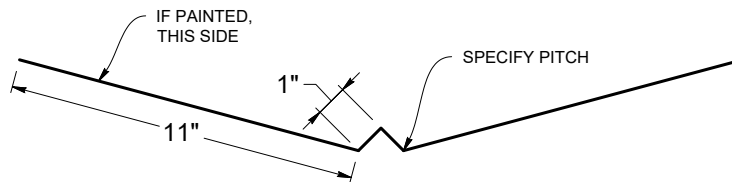


LOW SLOPE VALLEY LAP (Less Than 3:12 Pitch)

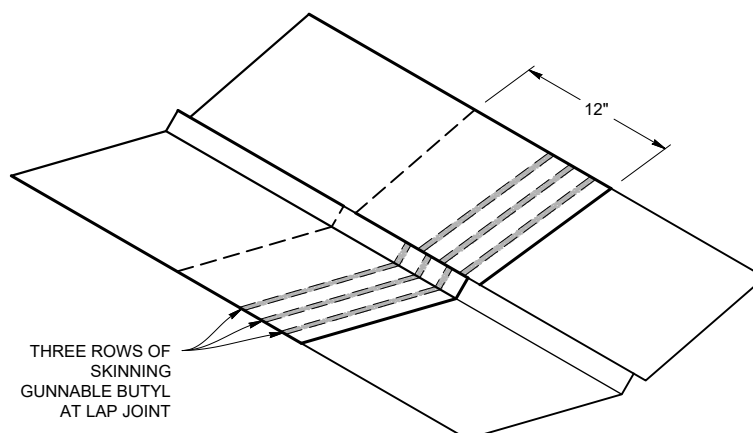


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.



STANDARD GABLE DETAIL

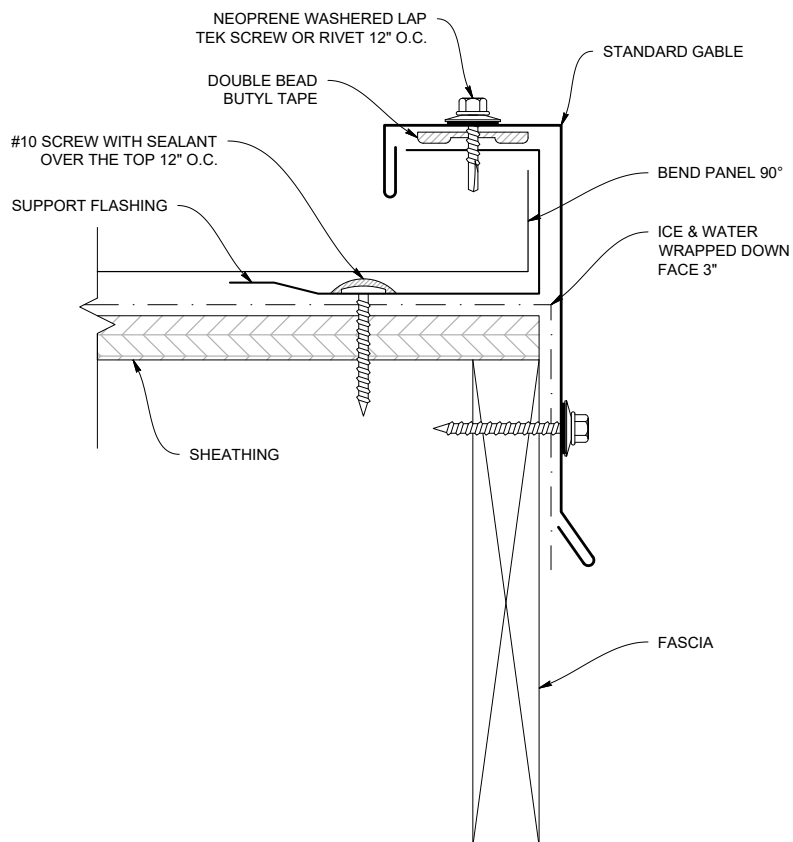

STANDARD GABLE (MS100GB / MS150GB)

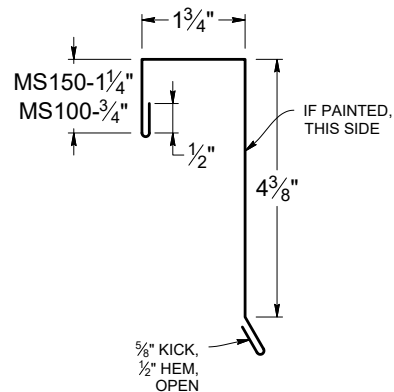


SUPPORT FLASHING (MS100SF / MS150SF)

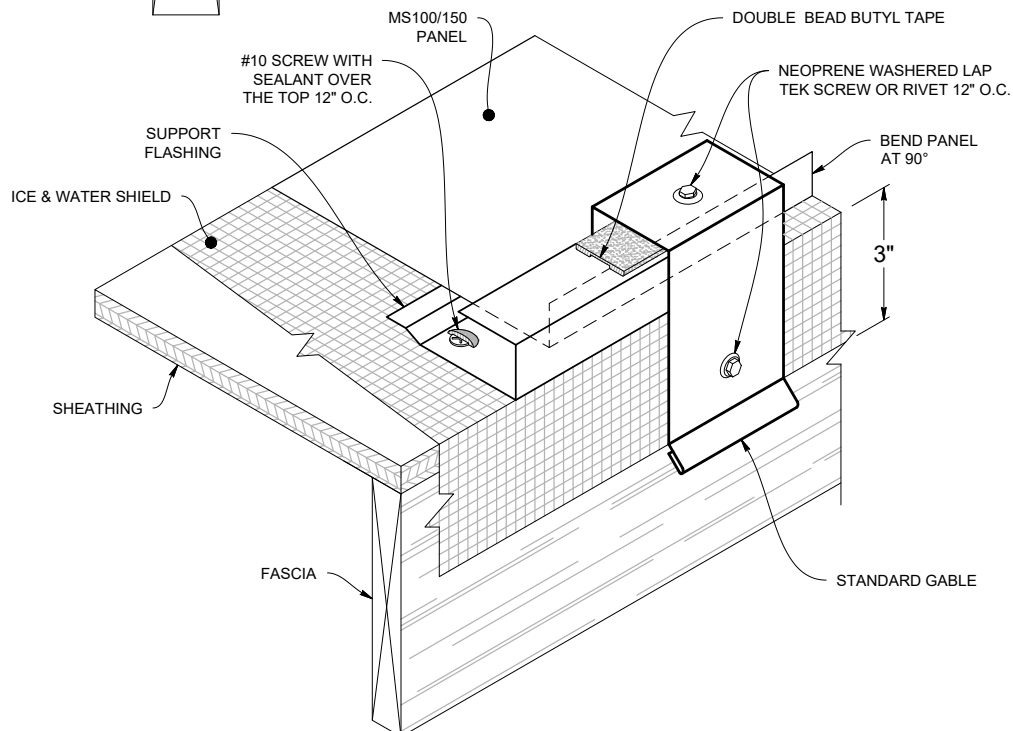


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Alternate Gable


SUPPORT FLASHING (MS100SF / MS150SF)

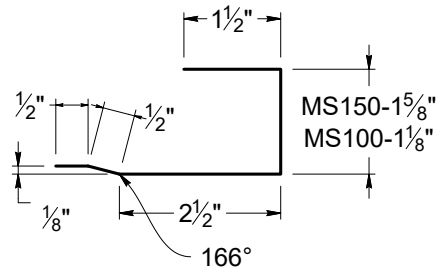


ALTERNATE GABLE (MS100AT / MS150AT)

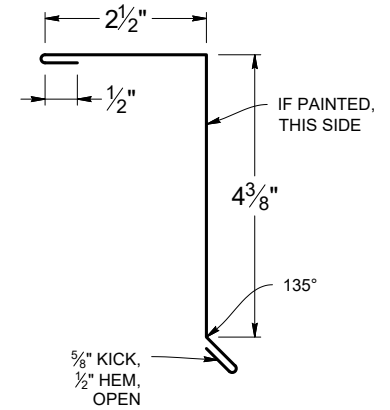

ALTERNATE GABLE DETAIL

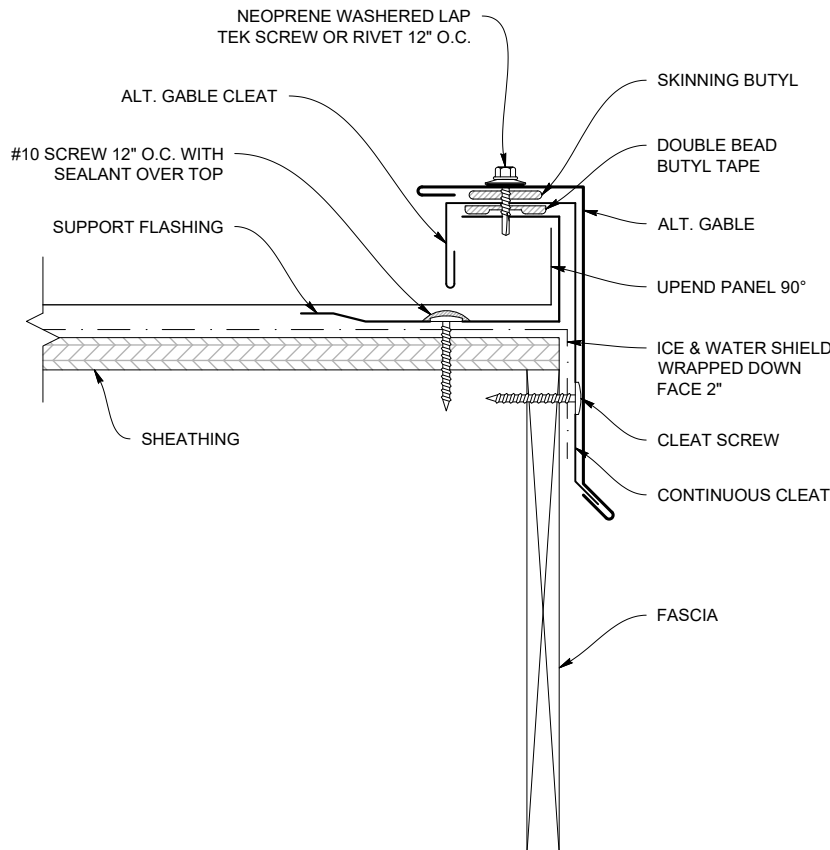


ALTERNATE GABLE CLEAT (MS100AGC / MS150AGC)

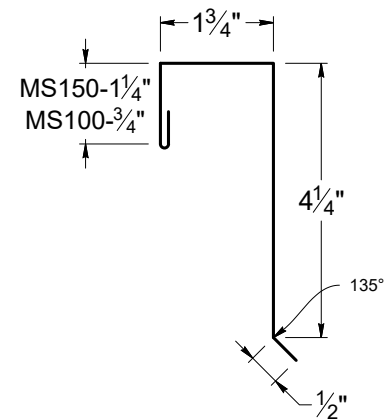


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.



SIDEWALL DETAIL

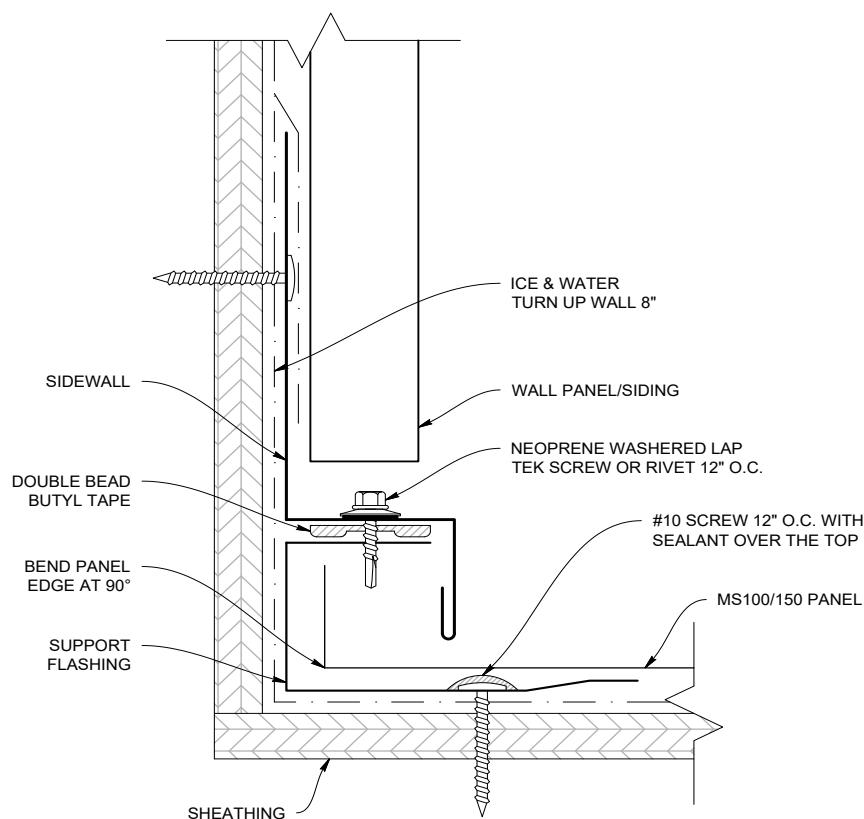

SIDEWALL (MS100SW / MS150SW)

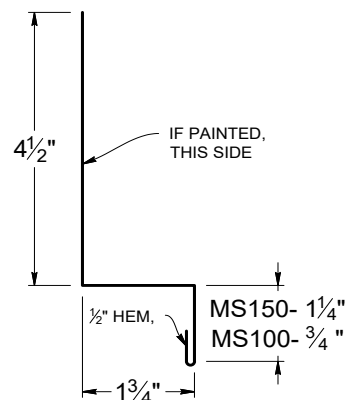

SUPPORT FLASHING (MS100SF / MS150SF)

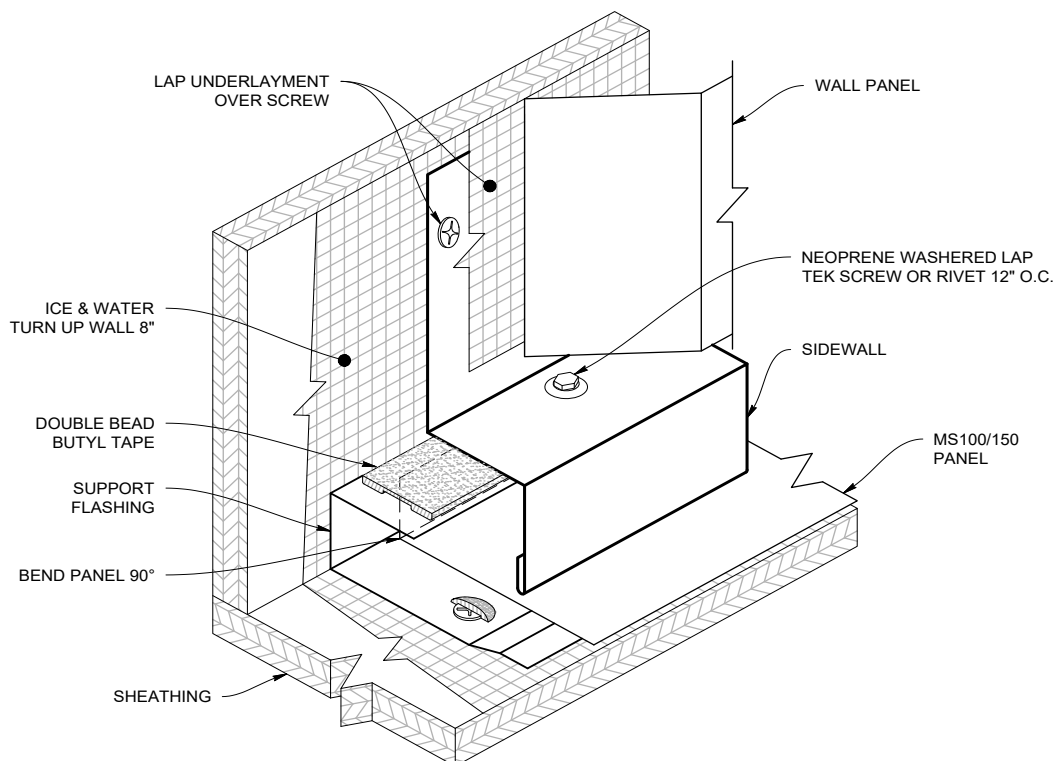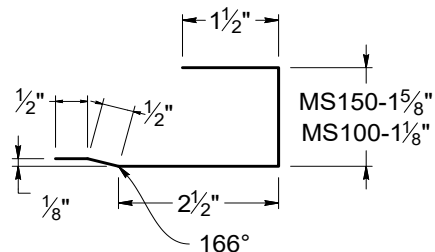


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.


Peak Flashing

(Ridge End Cap)


PEAK FLASHING DETAIL (RIDGE END CAP)

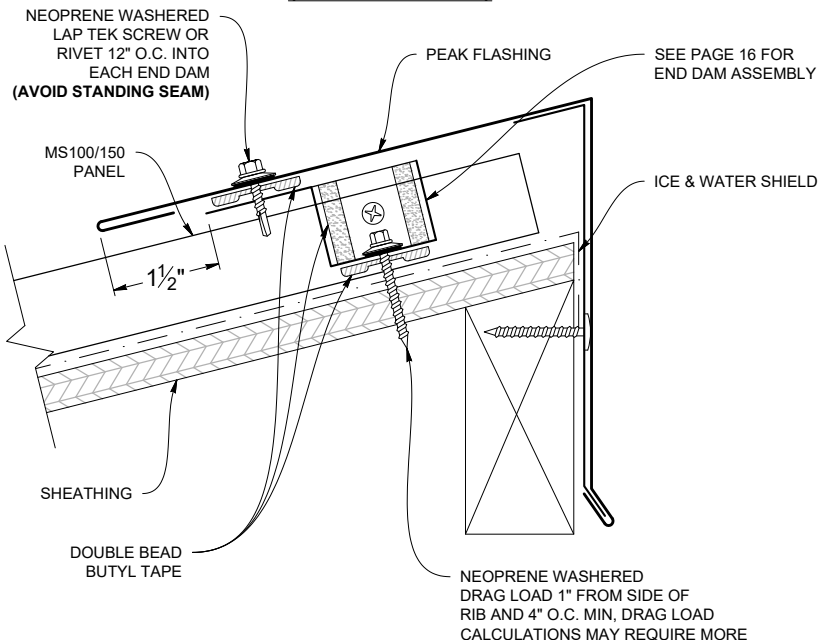


PEAK FLASHING (MS100REC / MS150REC)

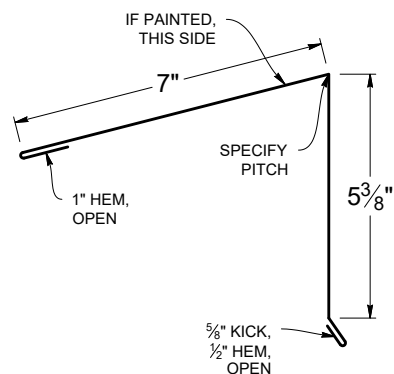

PEAK CLEAT (MS100RECC / MS150RECC)

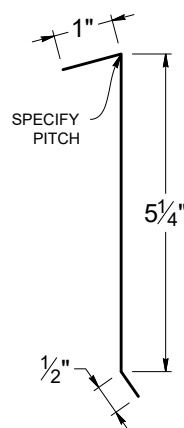

PEAK FLASHING LAP

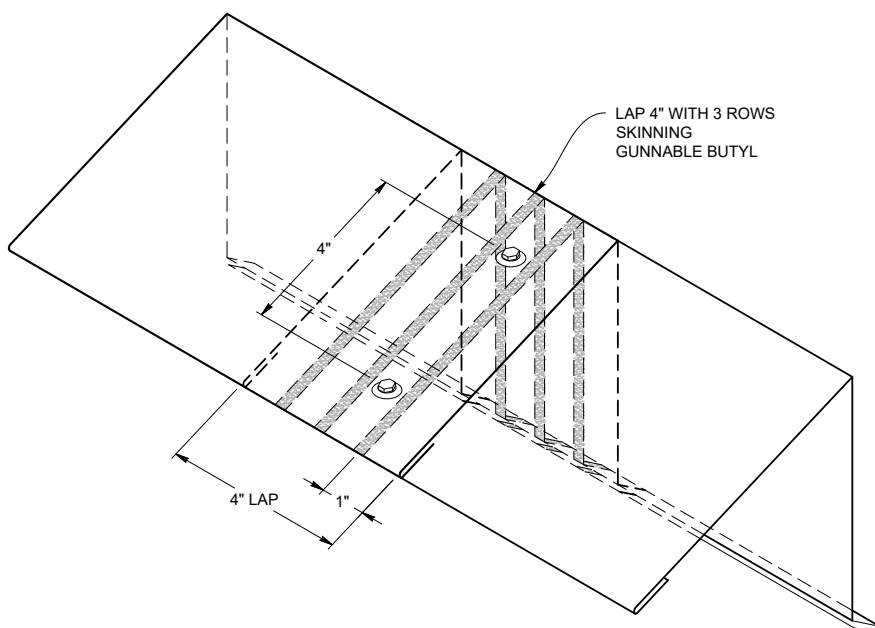


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.


Vented Peak Flashing

(Vented Ridge End Cap)


WT VENTED PEAK FLASHING DETAIL (Vented Ridge End Cap)

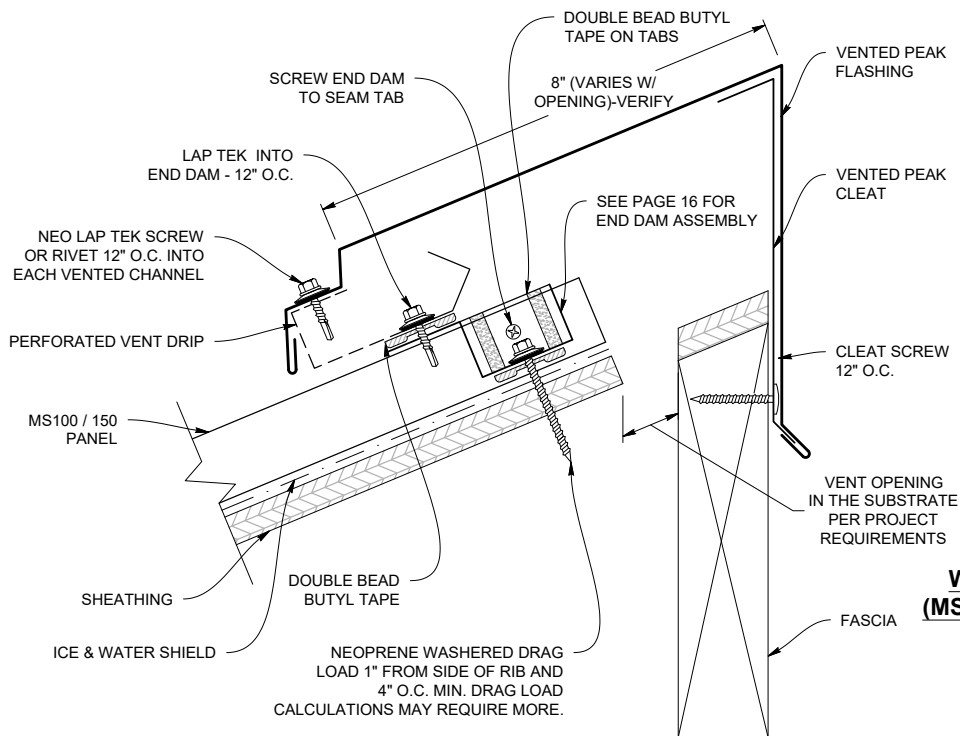


VENTED PEAK CLEAT (MS100VRECC / MS150VRECC)

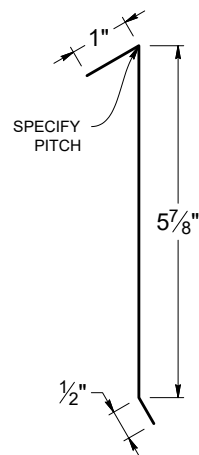


WT VENTED PEAK FLASHING (MS100WTRECV / MS150WTRECV)

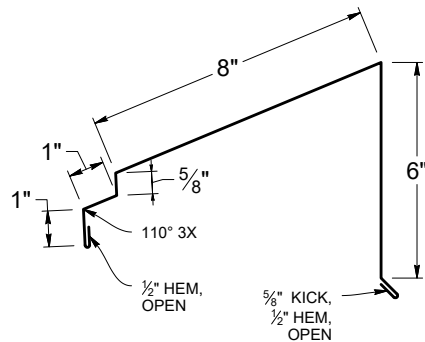

VENTED PEAK FLASHING LAP

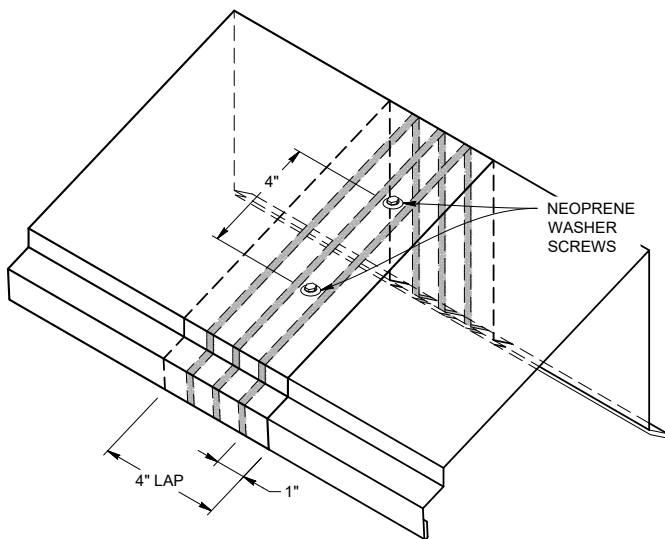

PERFORATED VENT DRIP: E2886 EMBER RESISTANT (MS100PVD / MS150PVD)

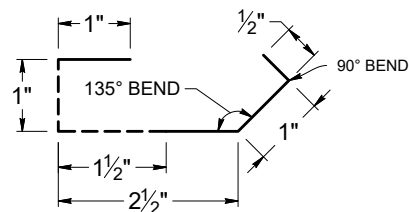


****NOTE: PERFORATED VENT DRIP IS COMPATIBLE WITH WT VENTED PEAK FLASHING ONLY****


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Pitch Change


PITCH CHANGE DETAIL

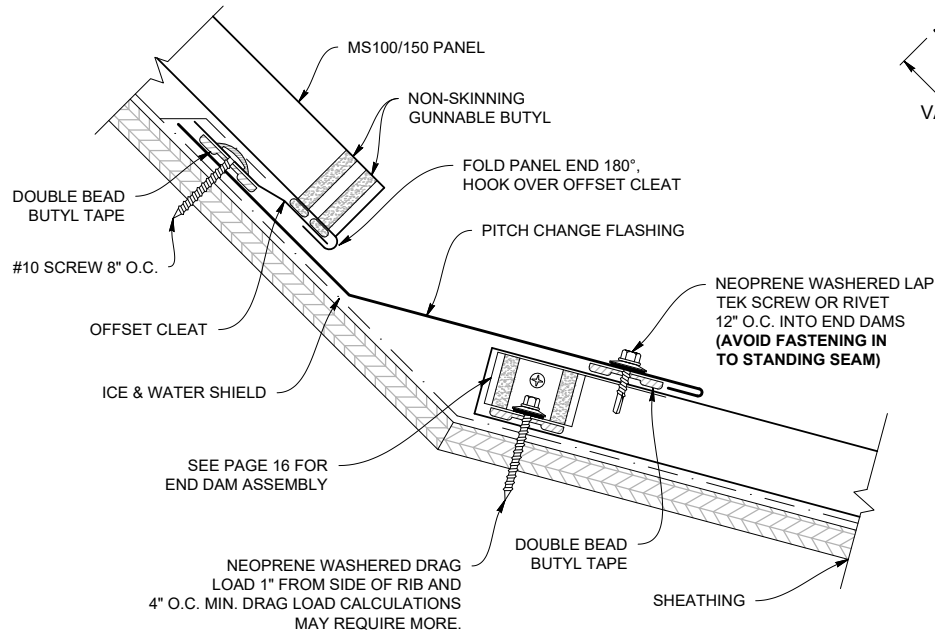


INSIDE PITCH CHANGE FLASHING

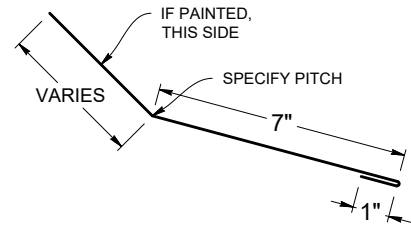

OFFSET CLEAT (MS100OC / MS150OC)




PITCH CHANGE LAP


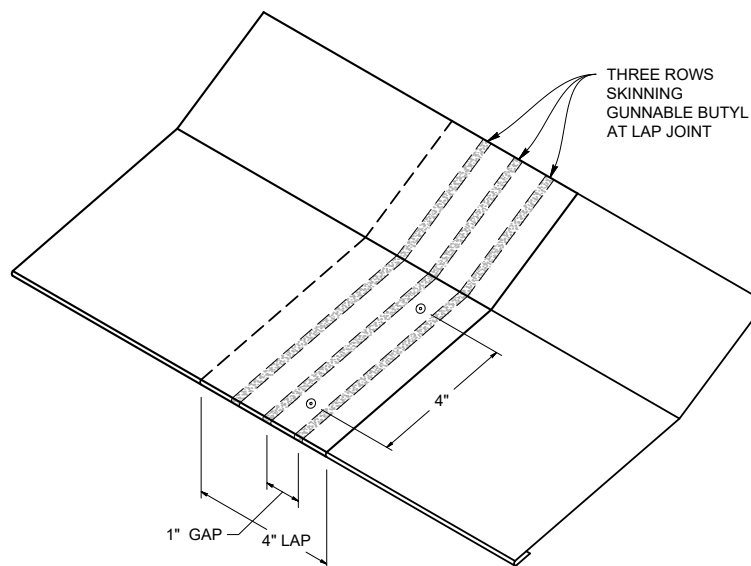


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

ENDWALL DETAIL

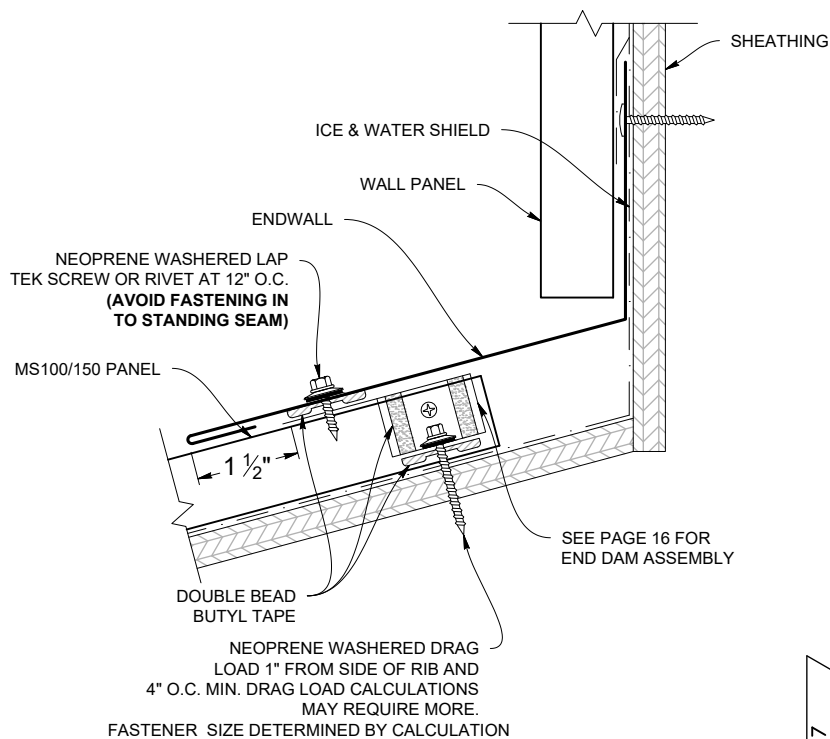


ENDWALL FLASHING (MS100EW / MS150EW)

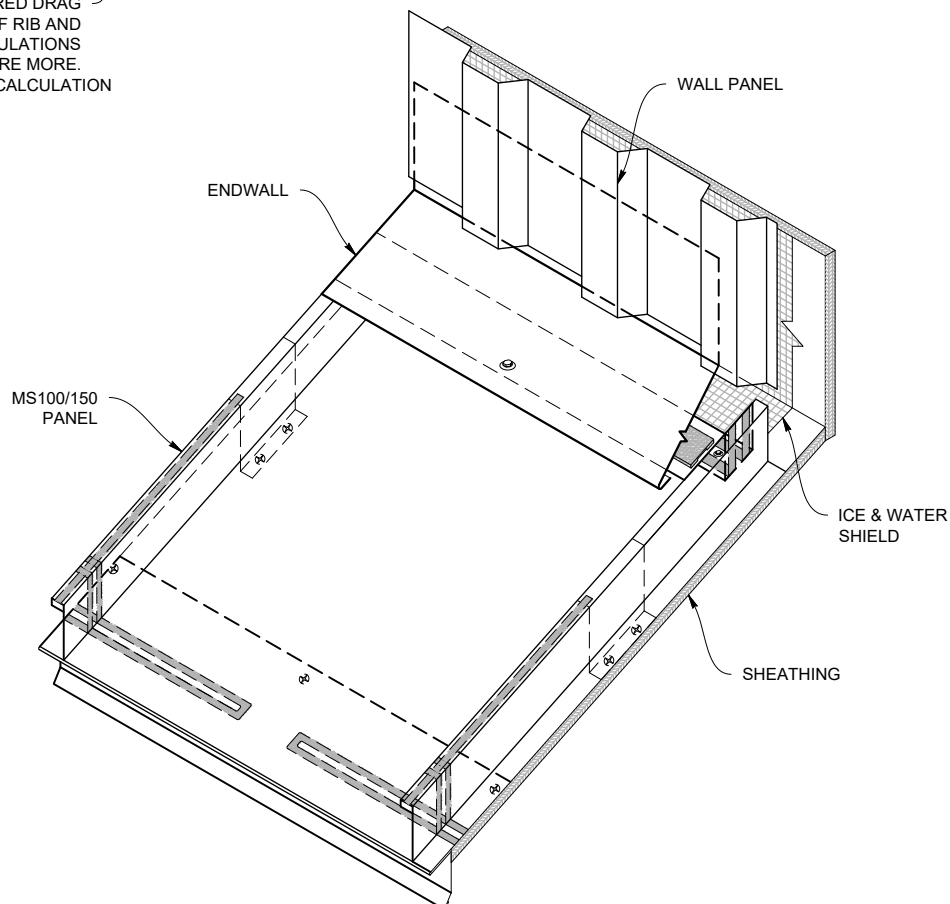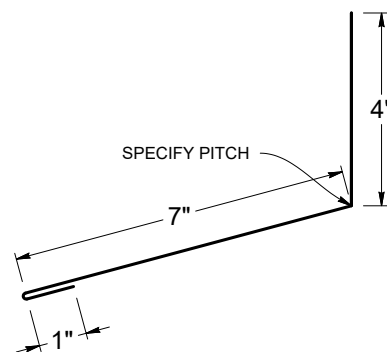


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Vented Endwall


WT VENTED ENDWALL DETAIL

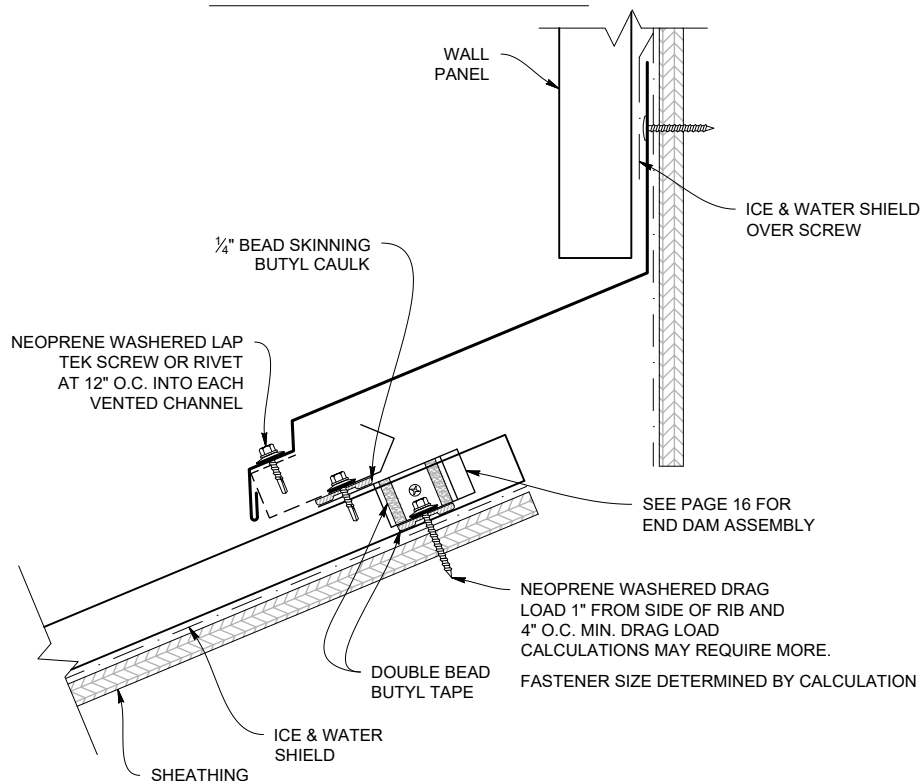


WT VENTED ENDWALL FLASHING (MS100WTEWV / MS150WTEWV)

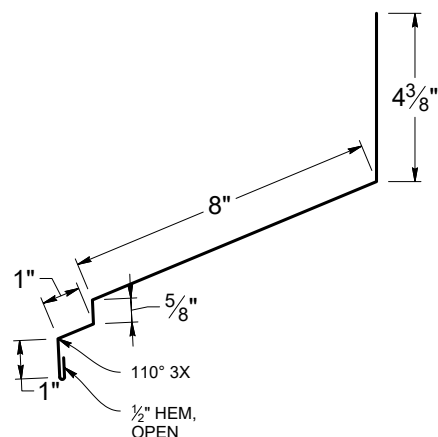

ENDWALL LAP

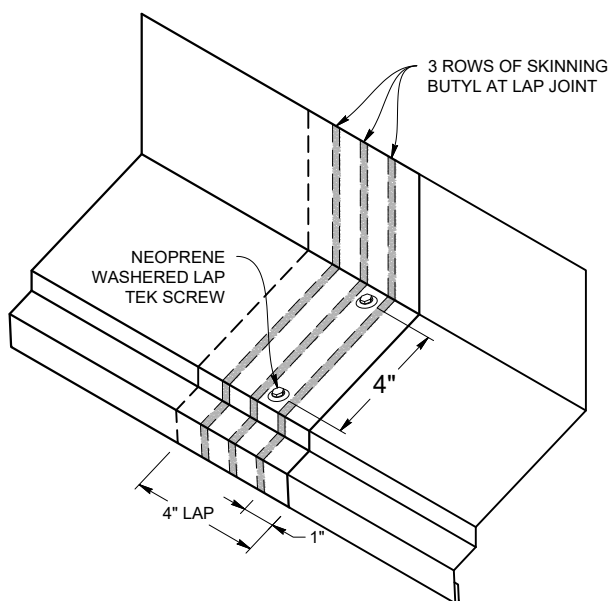


PERFORATED VENT DRIP: E2886 EMBER RESISTANT (MS100PVD / MS150PVD)

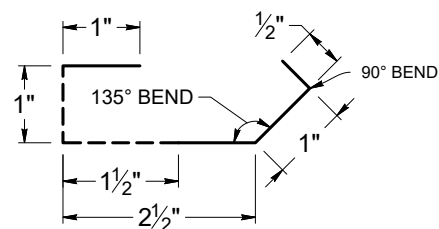


****NOTE: PERFORATED VENT DRIP IS COMPATIBLE WITH WT VENTED ENDWALL ONLY****

Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

STEP 1

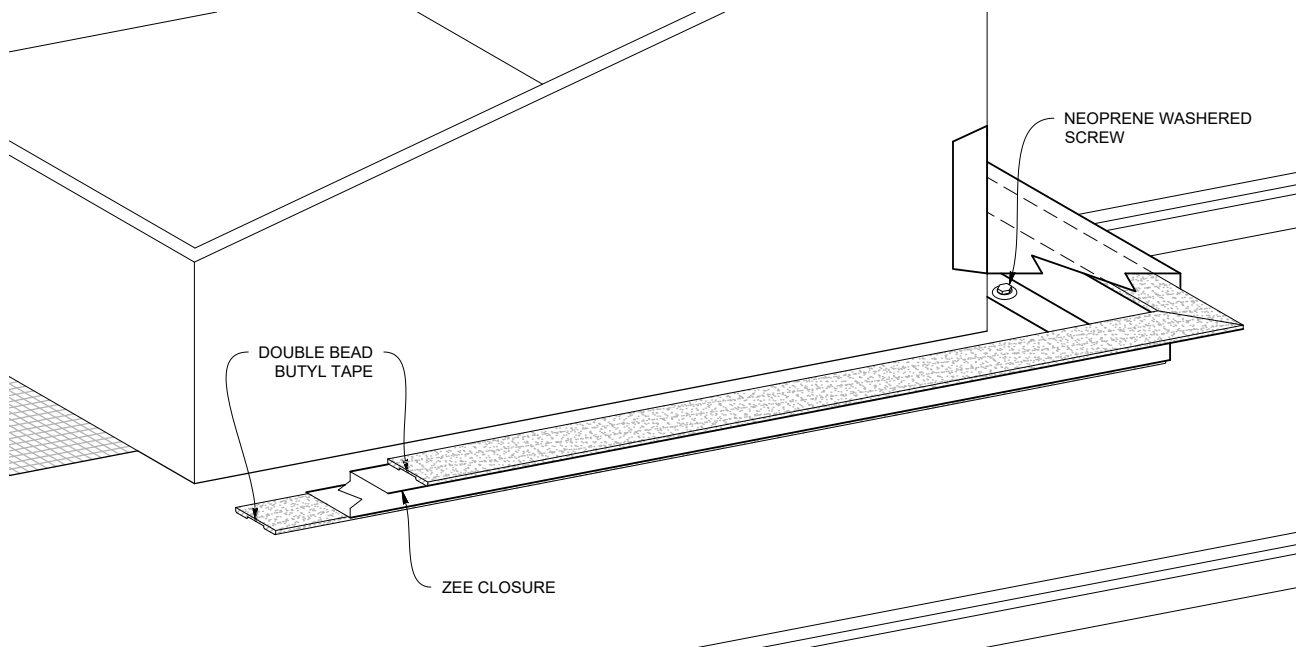


STEP 2

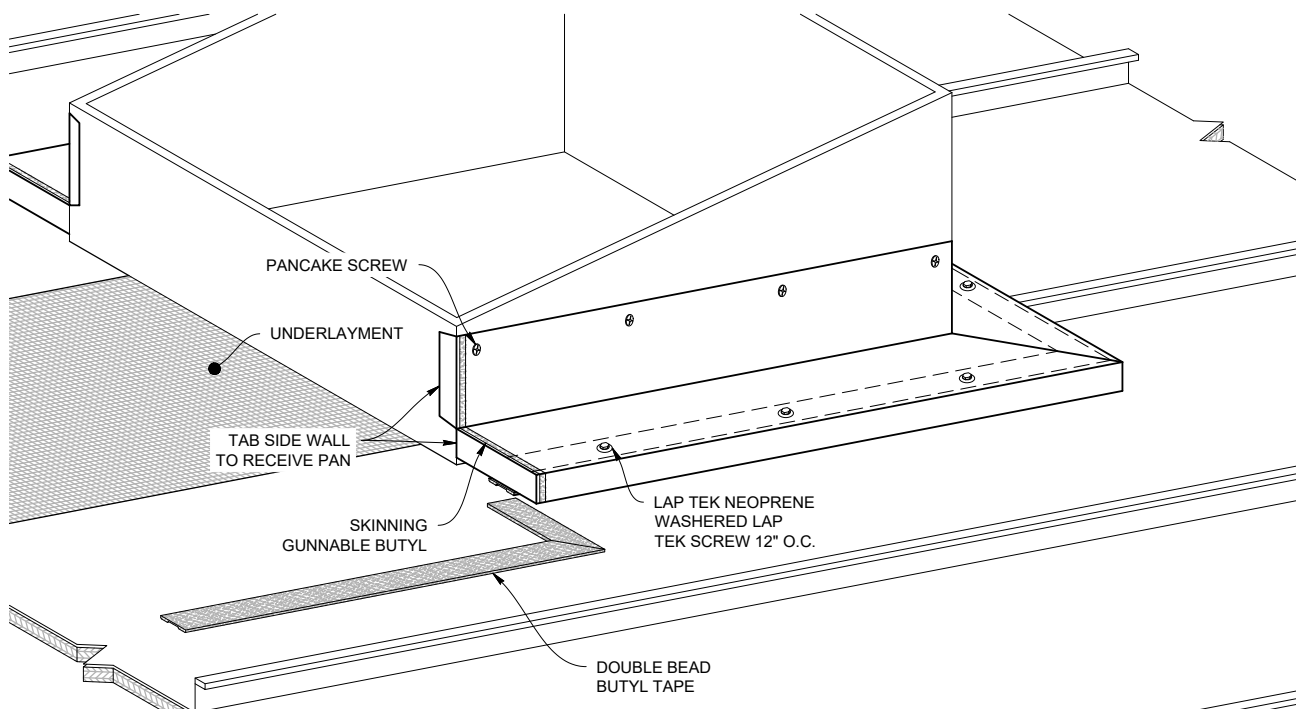


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.
Soldered or welded Stainless Steel crickets are allowed - except in corrosive environments

Curb Back Pan/Cricket

STEP 3

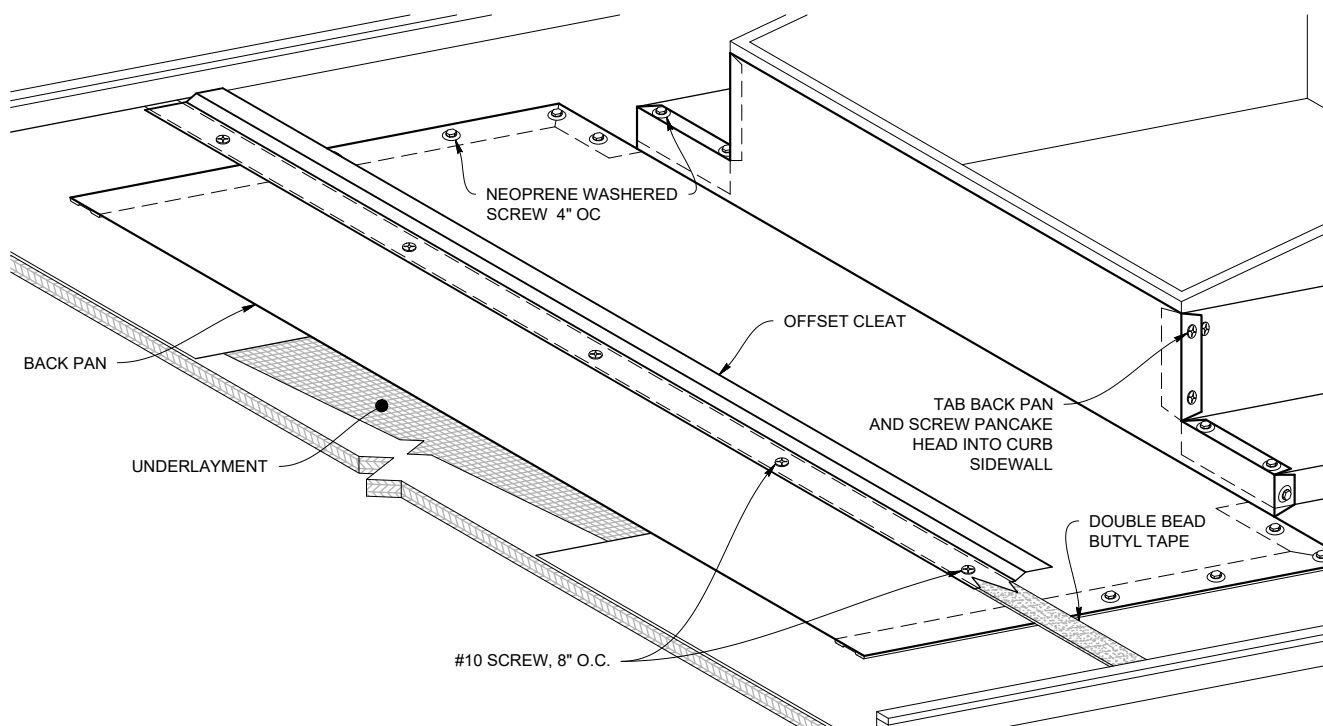


STEP 4

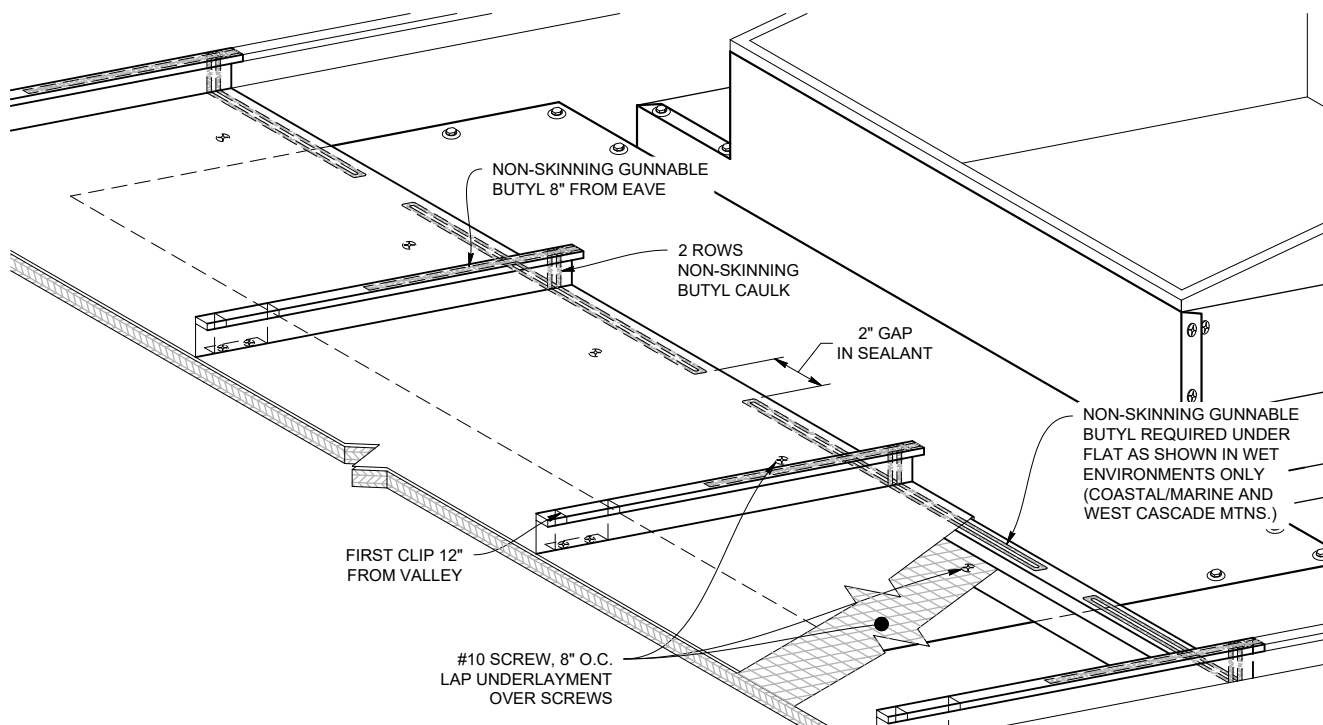


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.
Soldered or welded Stainless Steel crickets are allowed - except in corrosive environments

STEP 5

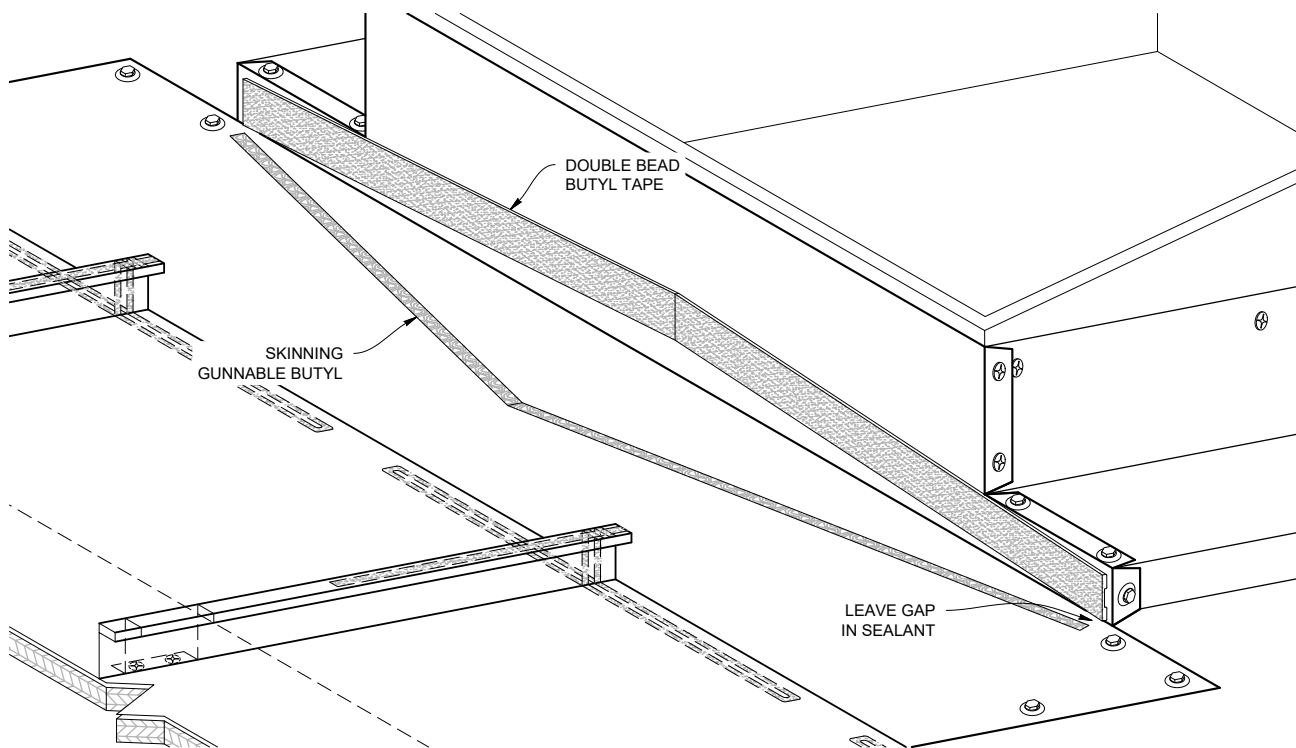


STEP 6

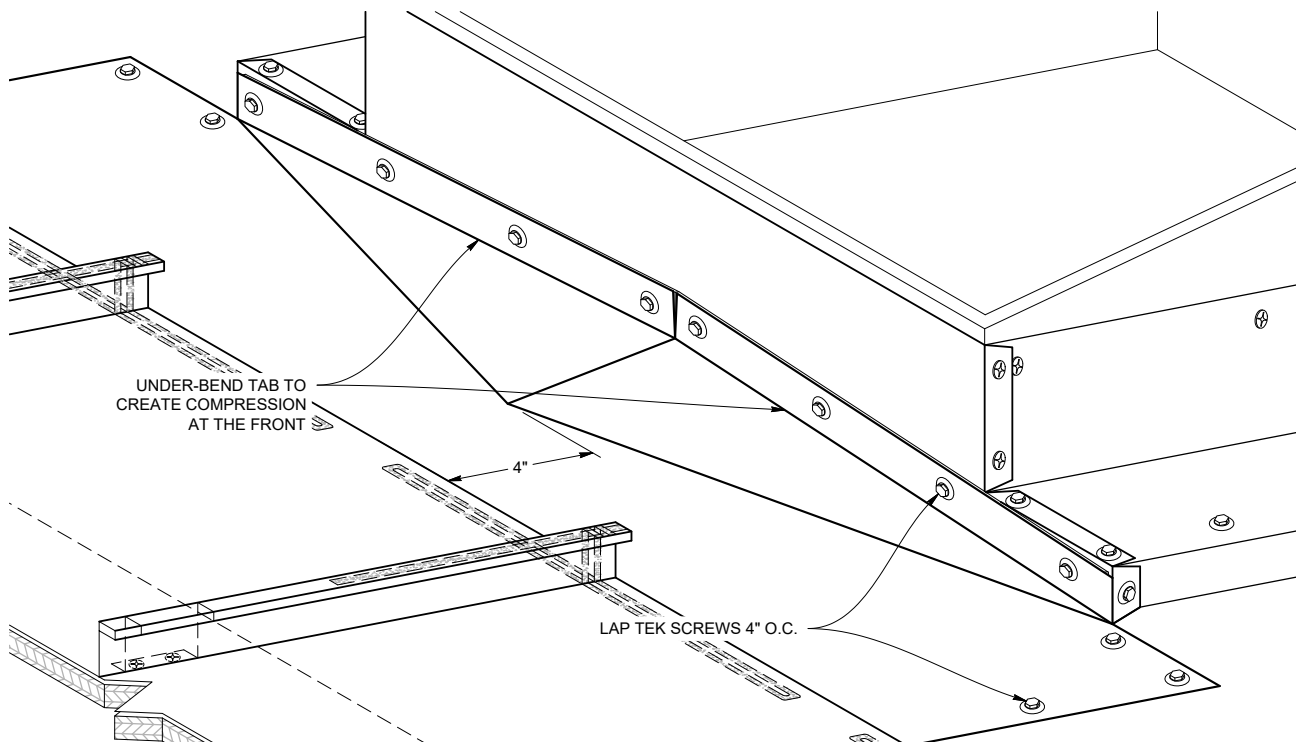


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.
Soldered or welded Stainless Steel crickets are allowed - except in corrosive environments


CURB SIDEWALL DETAIL

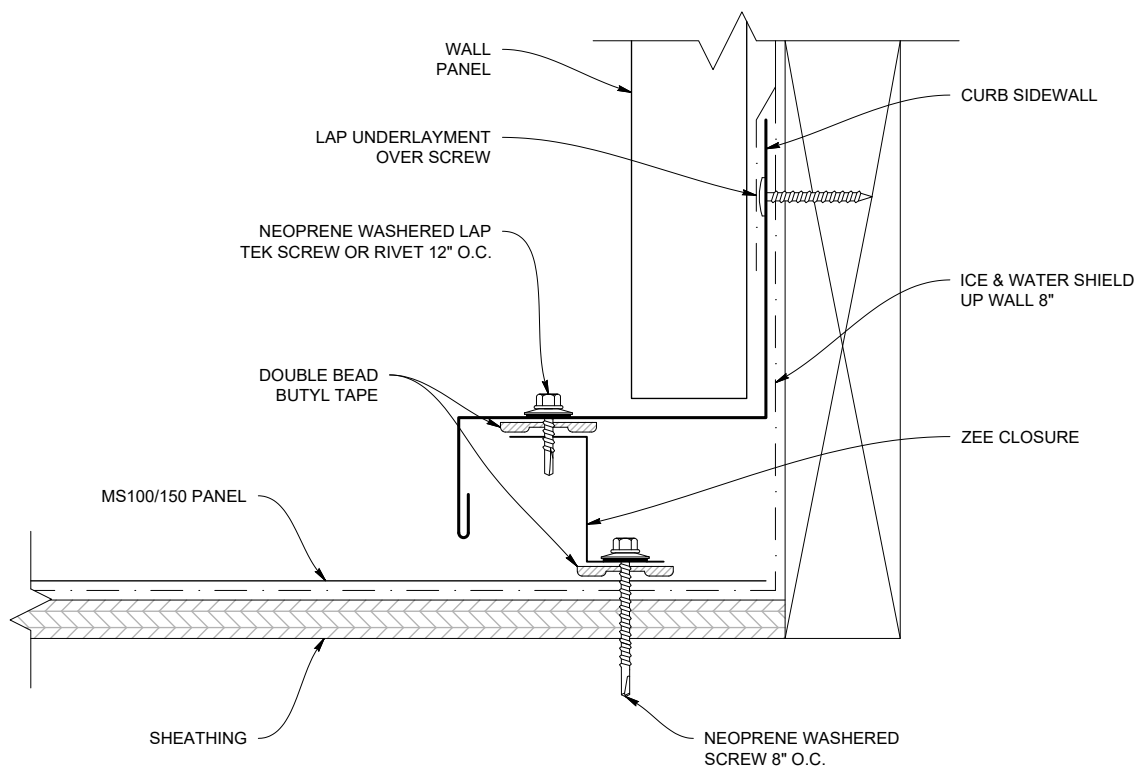

ZEE CLOSURE (MS100PVD / MS150PVD)




CURB SIDEWALL (MS100CSW / MS150CSW)

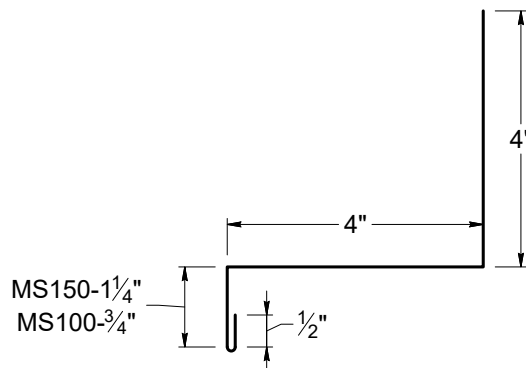


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.


CURB ENDWALL DETAIL

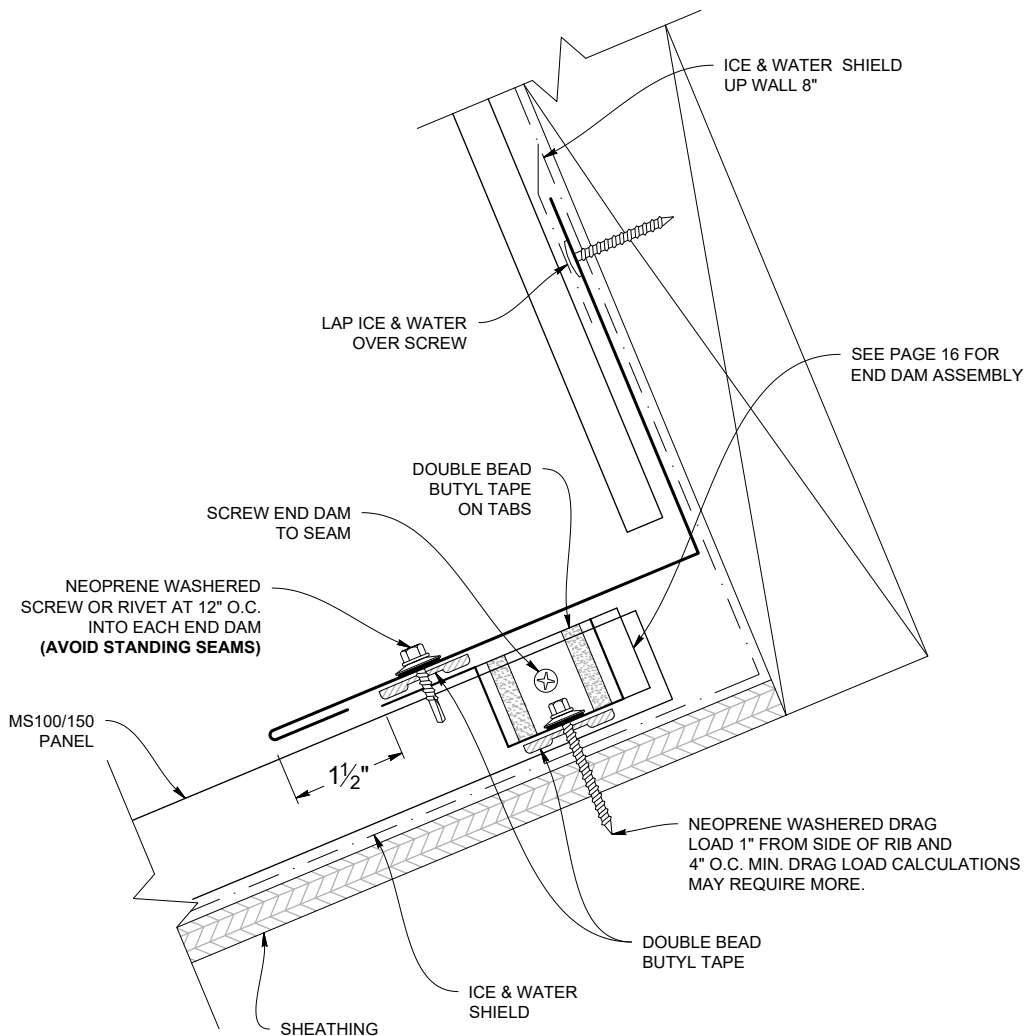

CURB ENDWALL FLASHING (MS100CH / MS150CH)

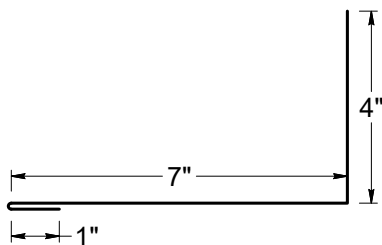

ENDWALL DETAIL

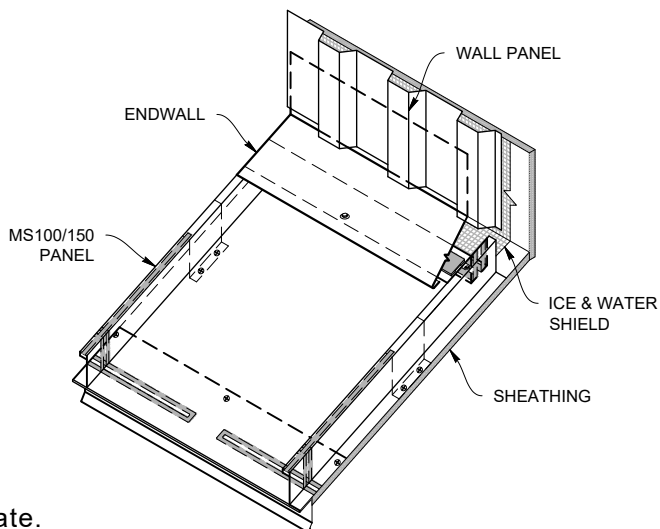

Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

TAYLOR
METAL PRODUCTS

UV RESISTANT SEALANT TOOL TO SHED WATER

FASTEN 4" O.C.

UNDER-BEND TAB TO CREATE COMPRESSION AT THE FRONT

DOUBLE ROW OF NON-SKINNING GUNNABLE BUTYL

4" MIN.

UV RESISTANT SEALANT TOOL TO SHED WATER

FIRST CLIP 12" FROM VALLEY

NON-SKINNING GUNNABLE BUTYL 8" FROM EAVE

LAP ICE & WATER SHIELD OVER SCREW

DOUBLE BEAD BUTYL TAPE

#10 SCREW 8" O.C.


22 GA. OFFSET CLEAT, SCREWED 8" O.C.

RUN ICE & WATER UP CURB 8"

CURB BACK PAN

32


CURB BACK PAN / CRICKET DETAIL (Less Than 3:12 Pitch)

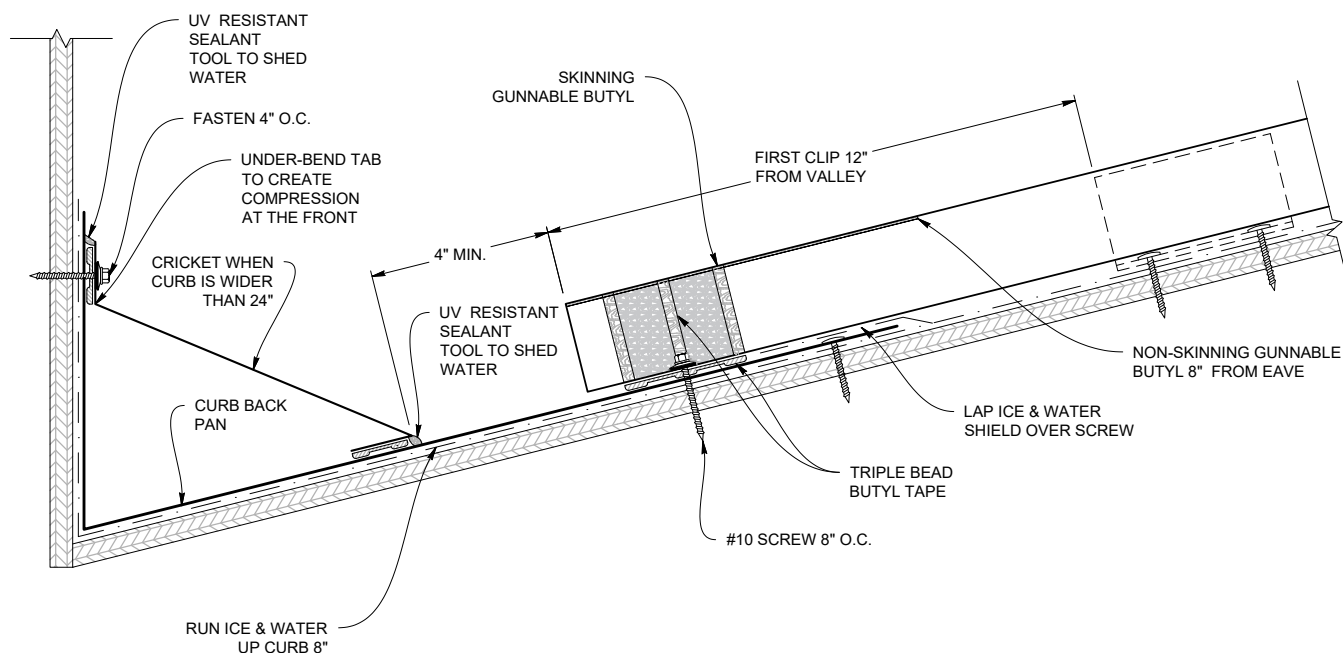


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Eave to Gable Transition


EAVE TO GABLE TRANSITION

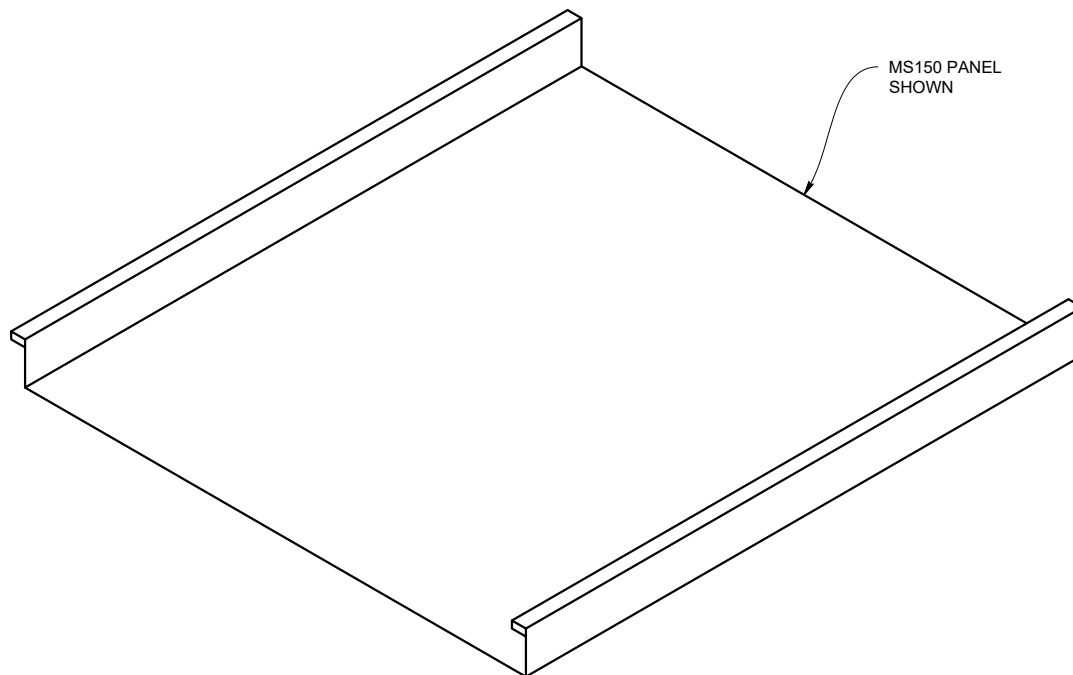


STEP 1

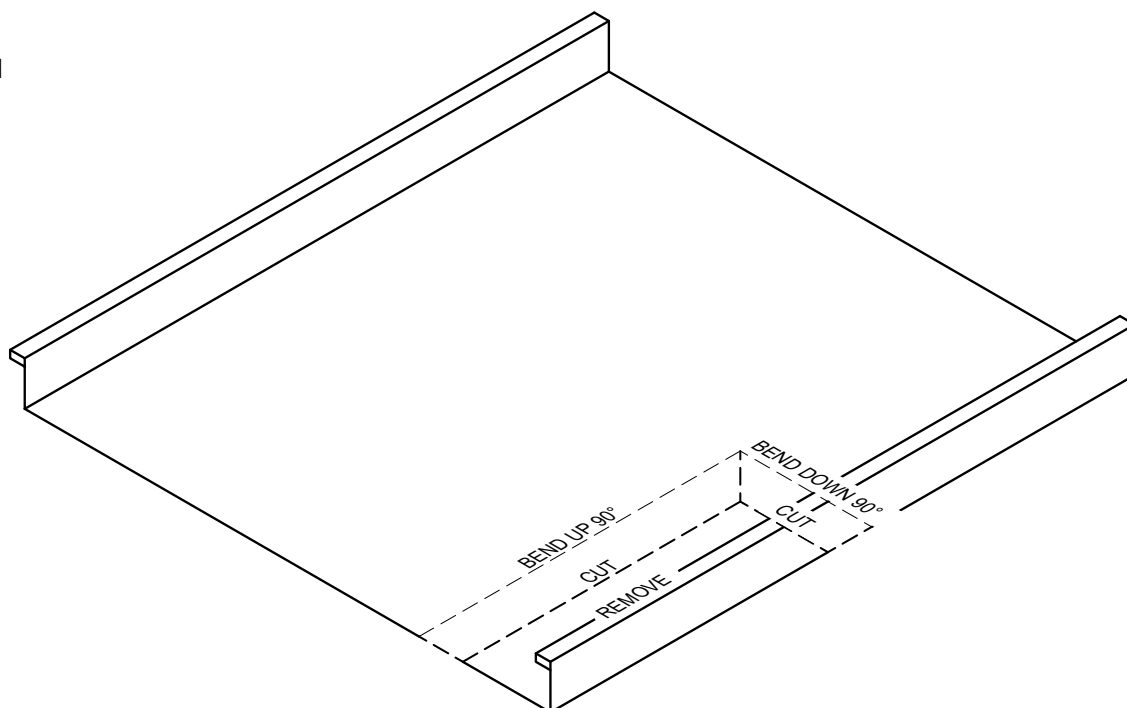

Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

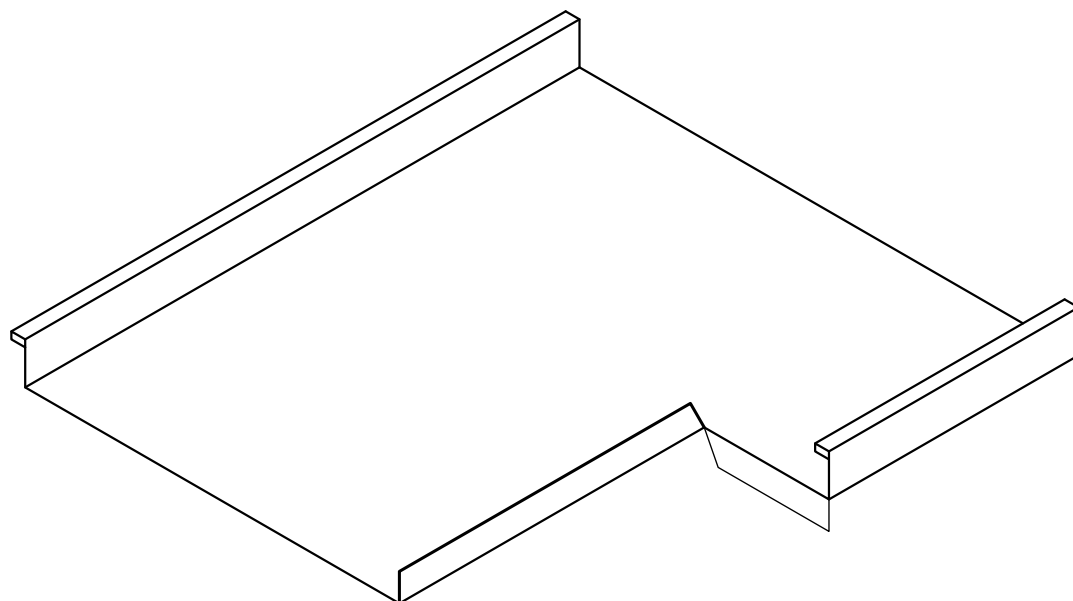


STEP 2

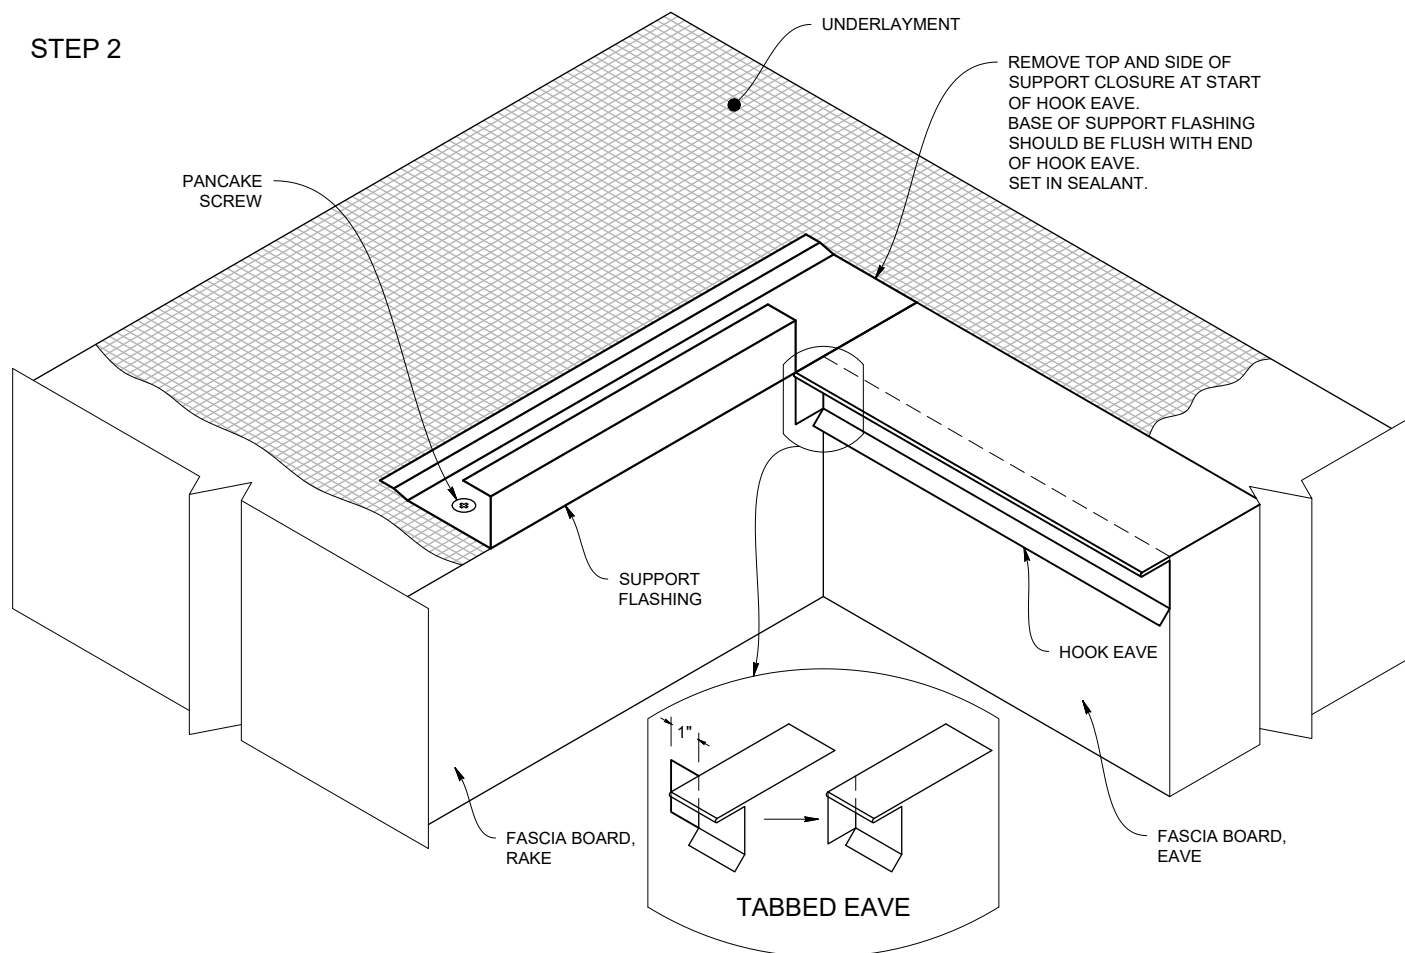


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

Eave to Gable Transition

STEP 3


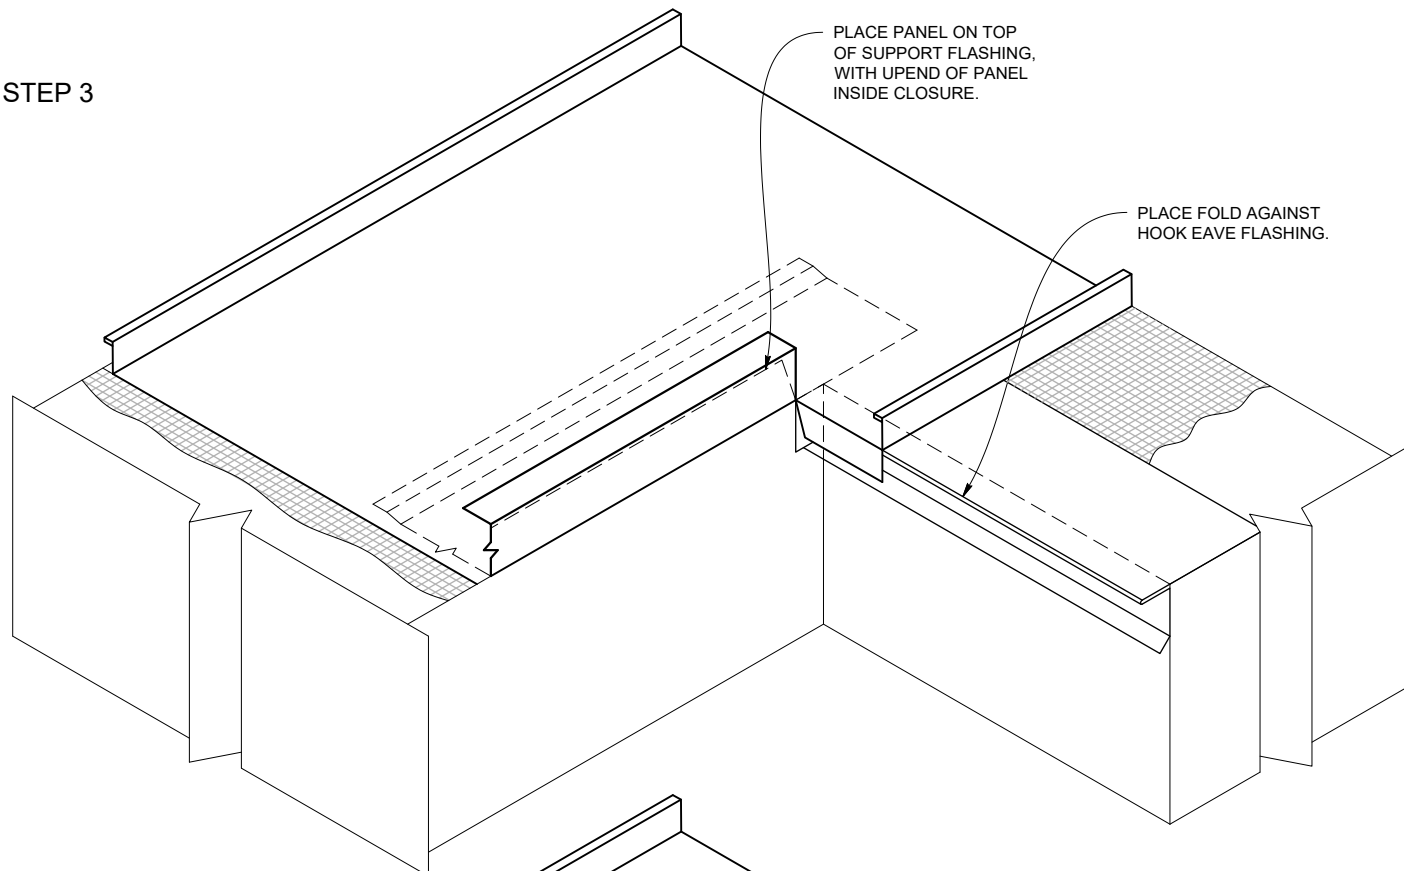


STEP 4

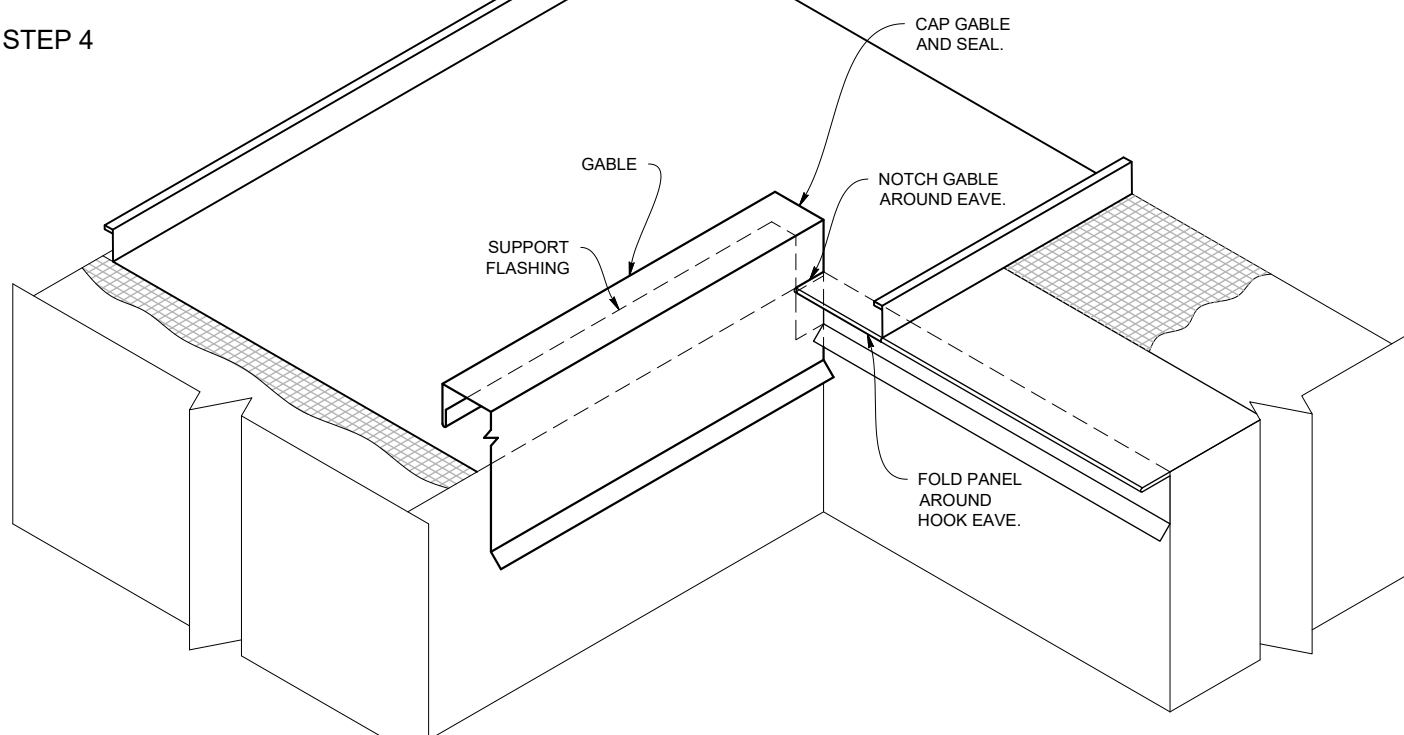


Note: All screws must be fastened into solid substrate.
Flashing must be lapped 4" with 3 rows of gunnable butyl caulk.

FOR PIPES LOCATED GREATER THAN 20' FROM PIN POINT

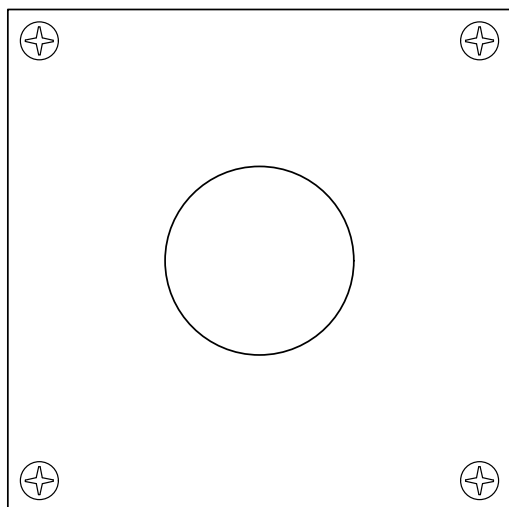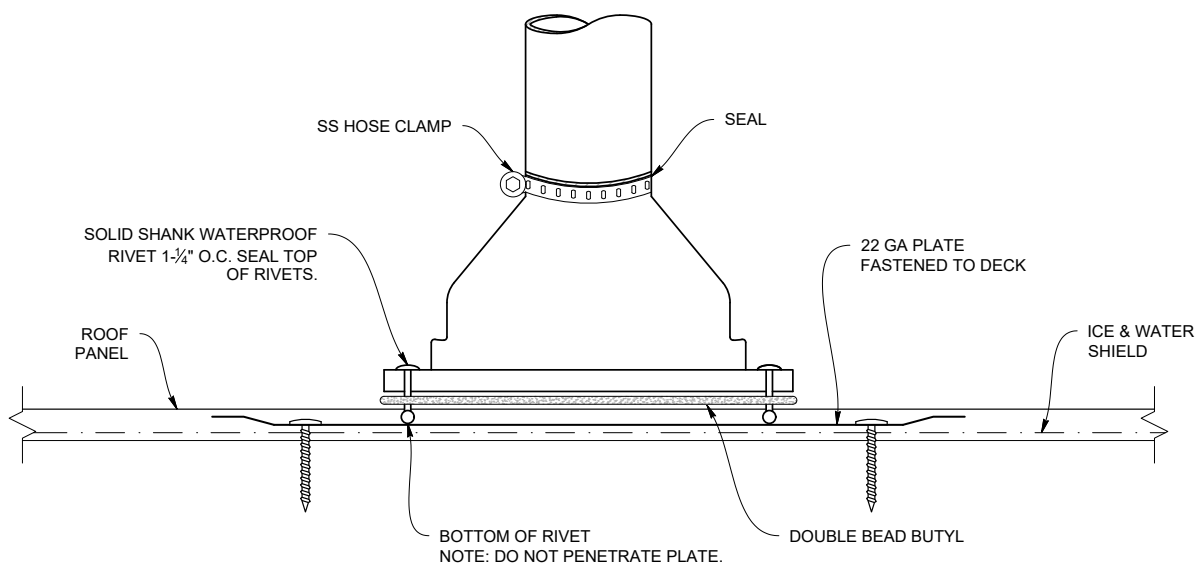

SINGLE 22 GAUGE PLATE

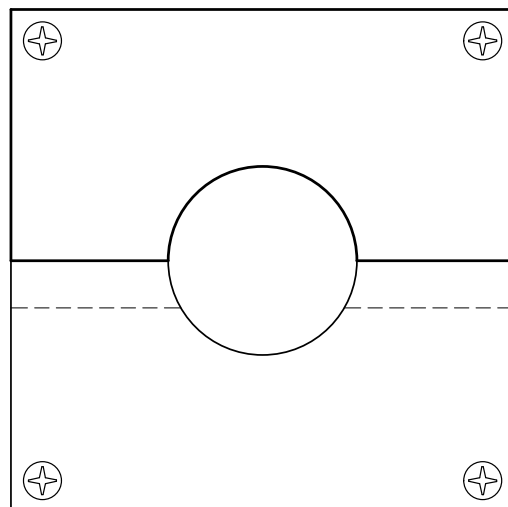

TWO OVERLAPPING 22 GAUGE PLATES


Note: If pipe penetration is over 20 ft. from PIN point, the Z closures shall be riveted to the panel the under layment covered by 22 ga. skid plate to protect the underlayment from rivets and thermal movement.

Pipe Penetration - on Rib


Home Plate Option



STEP 1

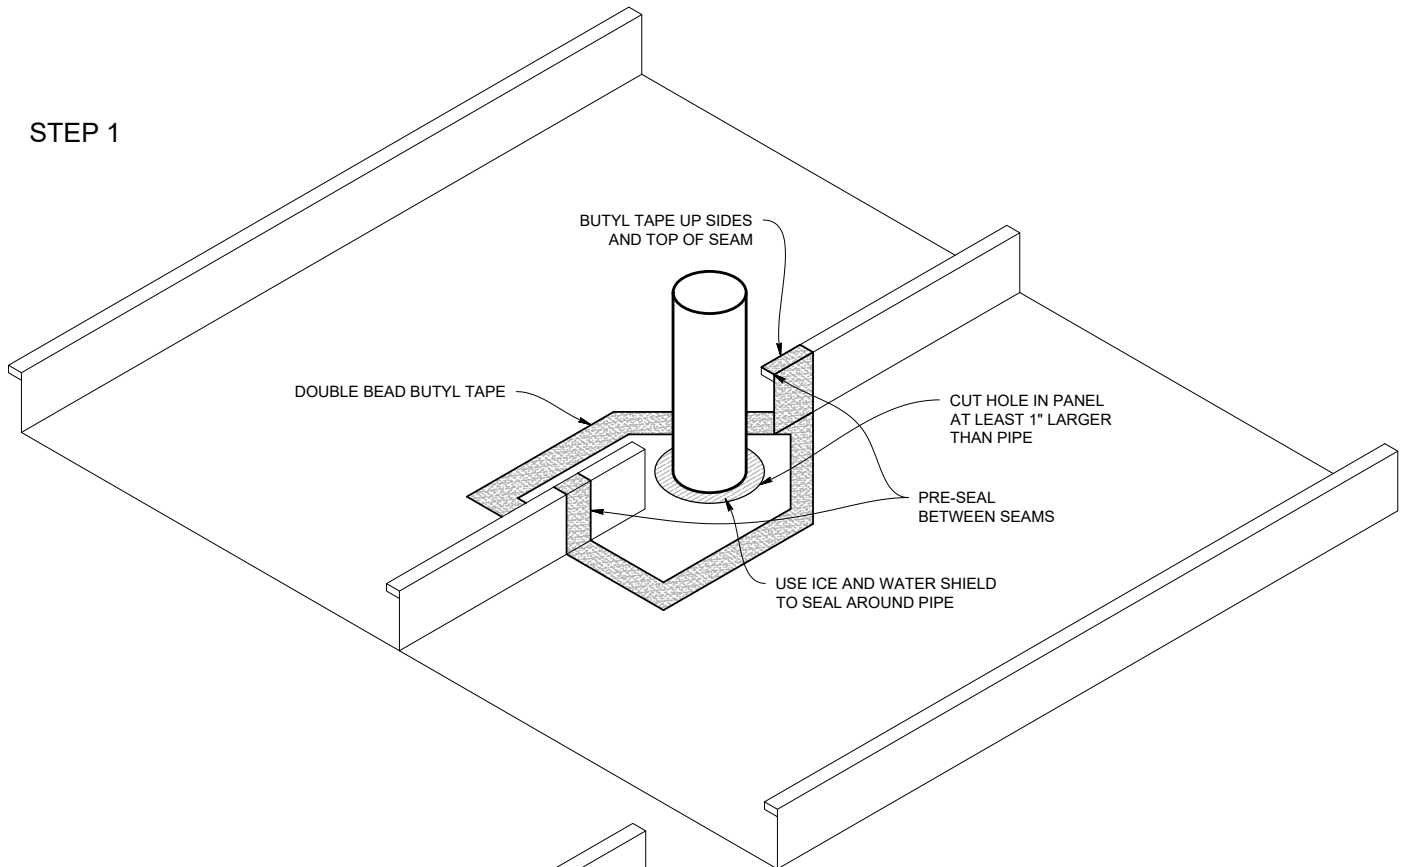


STEP 2

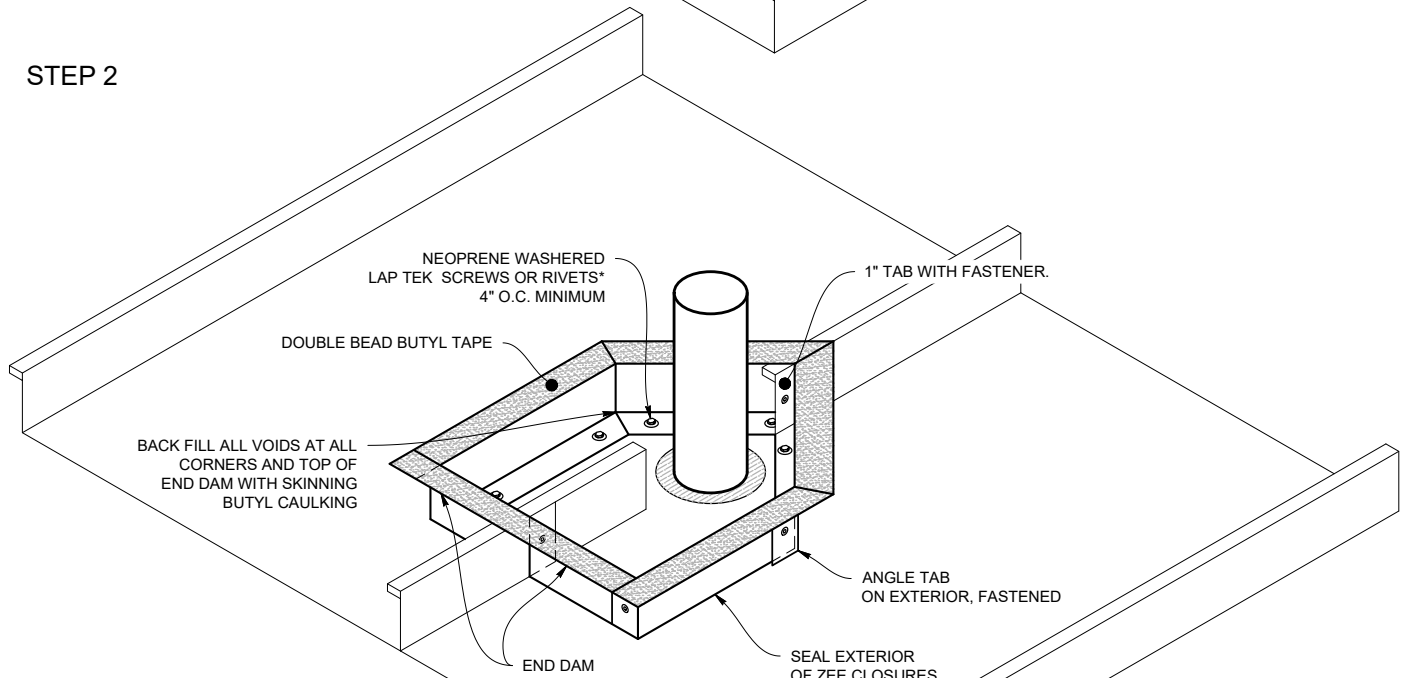


*Use #63 closed end (solid shank) rivets and skid plate when penetration is greater than 20' from fixed pin point when installations are over a solid deck.

Note: All screws must be fastened into solid substrate. Flashing must be lapped 4" with 3 rows of gunnable sealant.

STEP 3

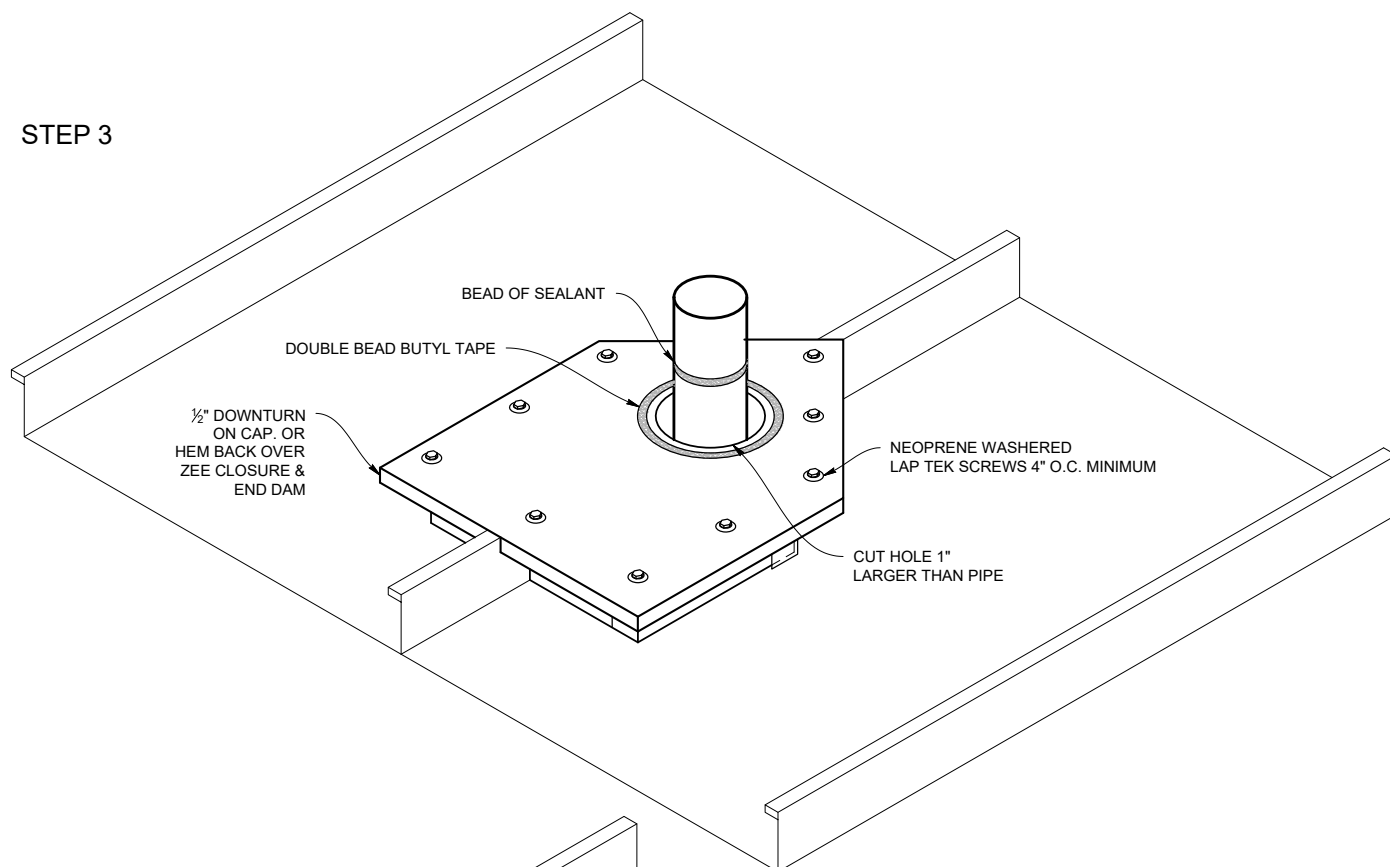


STEP 4

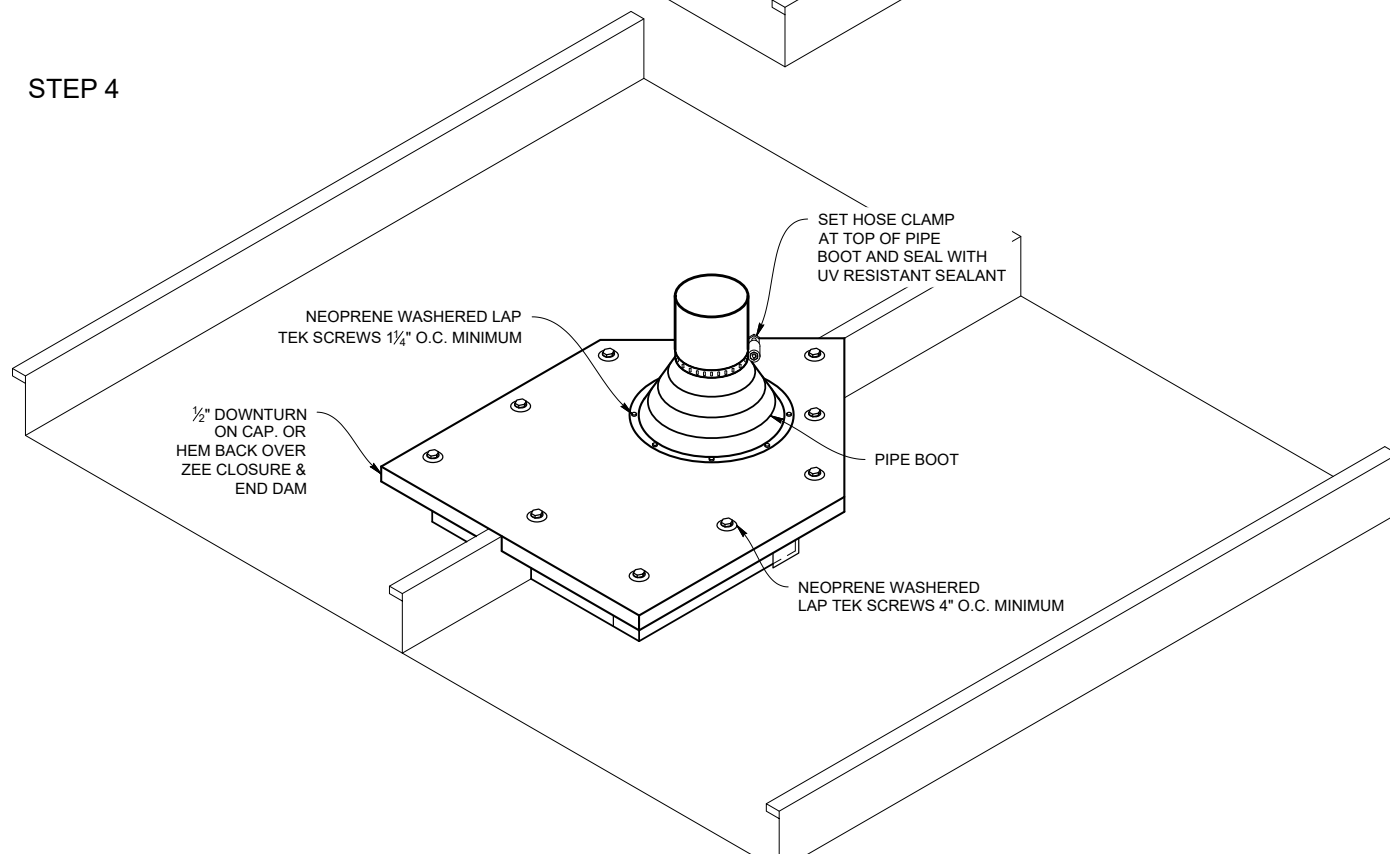


Note: All screws must be fastened into solid substrate. Flashing must be lapped 4" with 3 rows of gunnable sealant.

Pipe Penetration - on Pan

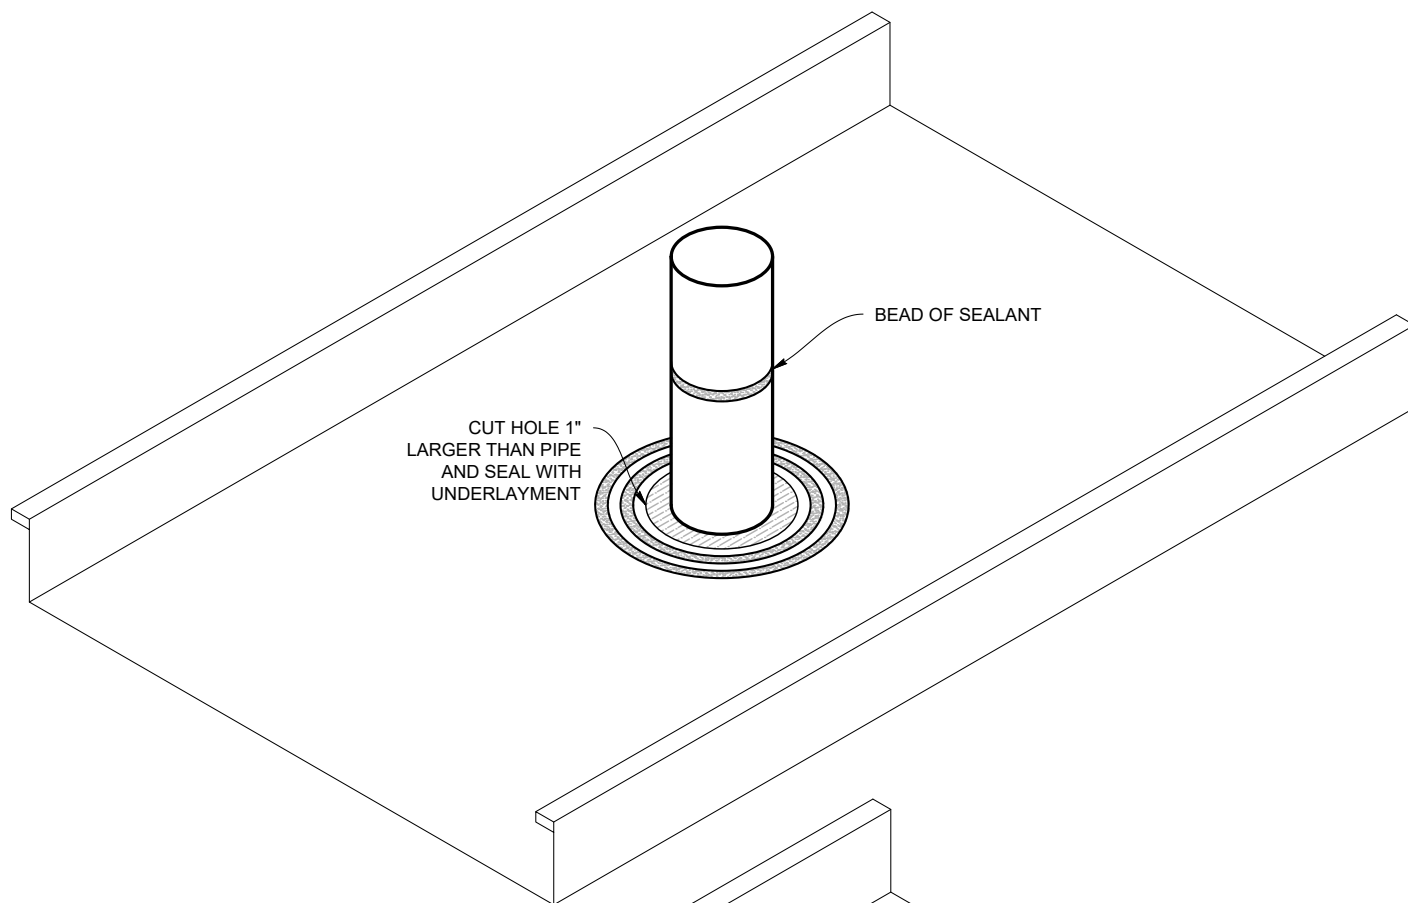


Note: Allow a minimum of 2" between the base of the pipe flashing and the standing seam.

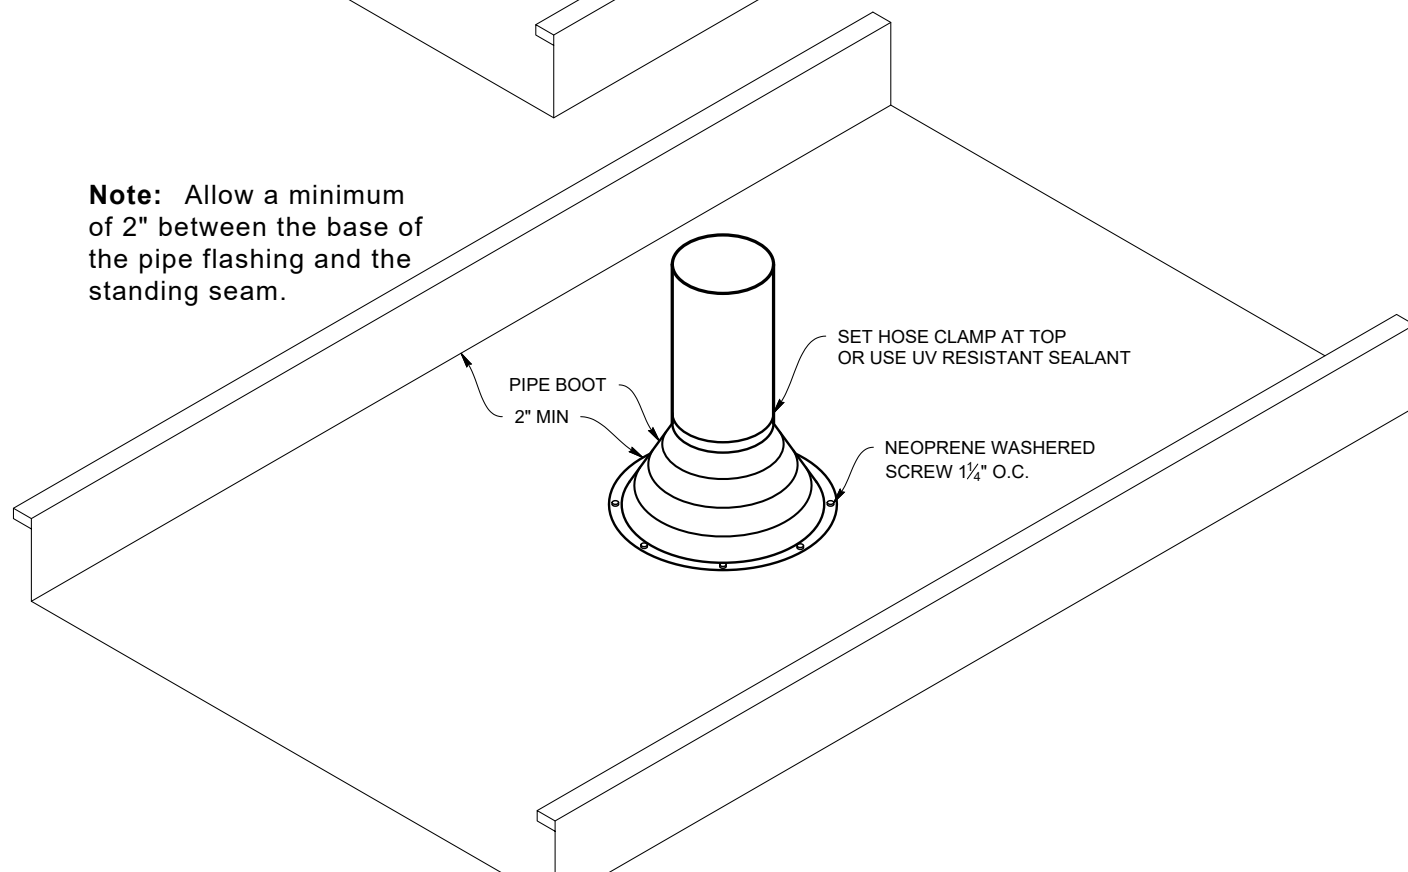


Note: If pipe penetration is over 20 ft. from PIN point, the pipe flashing shall be riveted to the panel the underlayment covered by 22 ga. skid plate to protect the underlayment from rivets and thermal movement.

EAVE STANDARD (MS100ES / MS150ES)

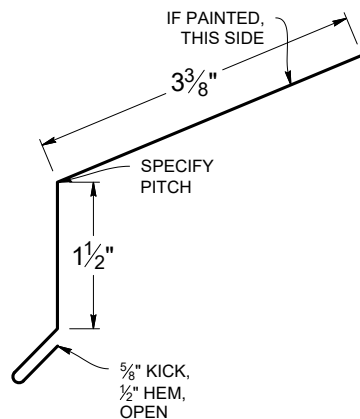

SCALE 1:2 S.O. 6" WEIGHT: 4.9 LBS.


EAVE HOOK (MS100EH / MS150EH)

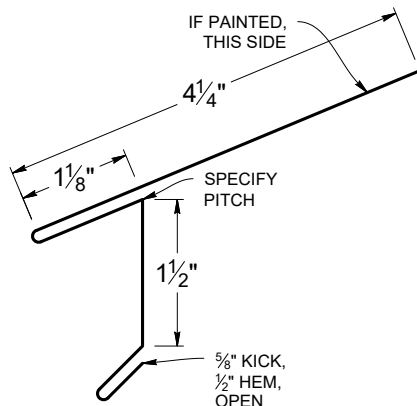

SCALE 1:2 S.O. 8" WEIGHT: 6.5 LBS.

OFFSET CLEAT (MS100OC / MS150OC)

NON-VISIBLE /
SUB-FLASHINGS ARE NOT
PROVIDED IN SPECIFIC
COLORS UNLESS SPECIFIED




SCALE 1:2 S.O. 3" WEIGHT: 2.5 LBS.

GUTTER HANGER (AGH6)


S.O. 8"

WEIGHT: 6.5 LBS.

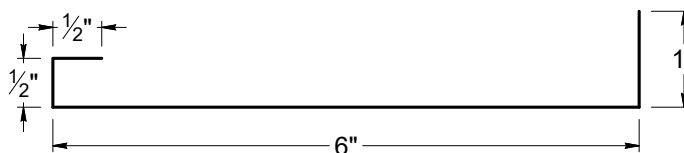


SCALE 1:2

BOX GUTTER (MS10065BG / MS15065BG)

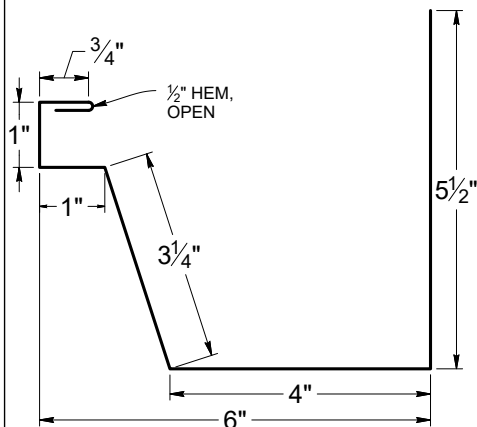


SCALE 1:3 S.O. 16" WEIGHT: 13.3 LBS.

STANDARD GABLE (MS100GB / MS150GB)

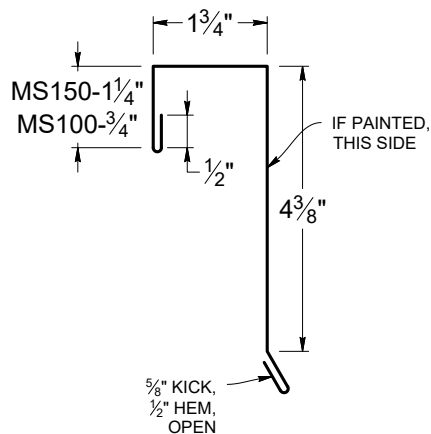

SCALE 1:3 S.O. 8.5"/9" WEIGHT: 7.6 LBS.

GABLE SUPPORT CLEAT (MS100GC / MS150GC)

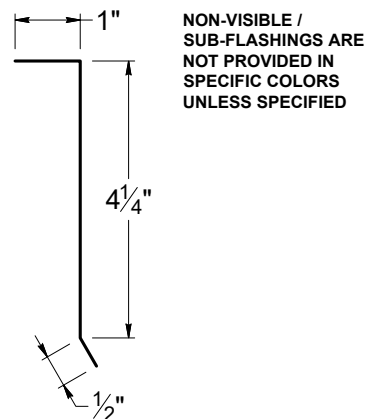


SCALE 1:3 S.O. 5.75" WEIGHT: 4.7 LBS.

MS-100™/MS-150™ WTW

Flashing and Details Selection
Flashing: 10' Standard




WT VENTED PEAK FLASHING (MS100WTRECV / MS150WTRECV)

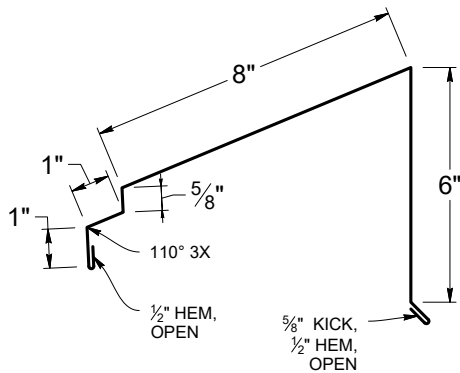


SCALE 1:4 S.O. 18.25" WEIGHT: 14.85 LBS.

PEAK FLASHING (MS100REC / MS150REC)

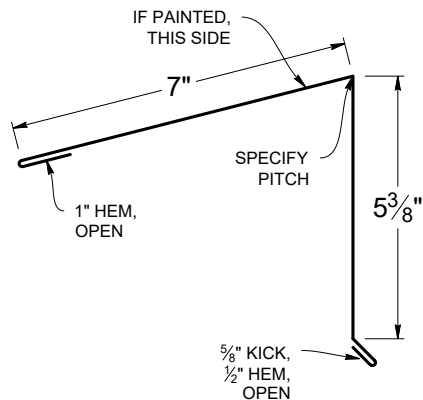


SCALE 1:4 S.O. 14.5" WEIGHT: 11.9 LBS.

PEAK CLEAT / VENTED PEAK CLEAT (MS100RECC / MS150RECC) (MS100VRECC / MS150VRECC)

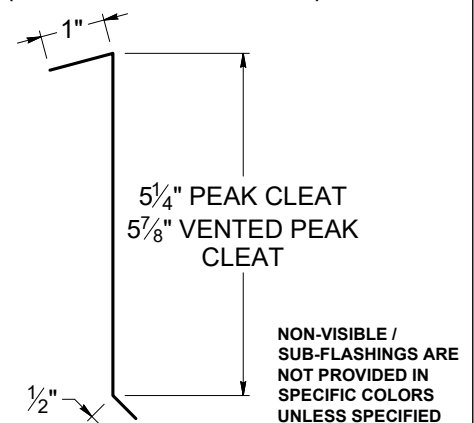


SCALE 1:3 S.O. 6.75" WEIGHT: 5.49 LBS.

ALTERNATE GABLE (MS100AT / MS150AT)

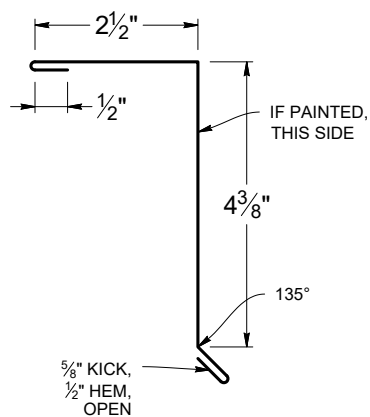


SCALE 1:3 S.O. 8.5" WEIGHT: 7 LBS.

ALTERNATE GABLE CLEAT (MS100AGC / MS150AGC)

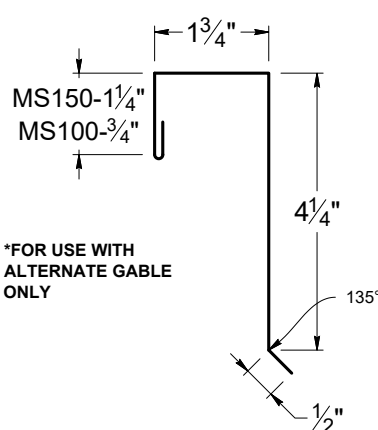


SCALE 1:3 S.O. 7.25"/7.75" WEIGHT: 4.7 LBS.

SUPPORT FLASHING (MS100SF / MS150SF)

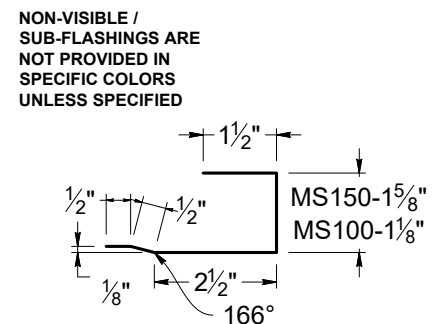


SCALE 1:3 S.O. 6.125"/6.625" WEIGHT: 6 LBS.

STANDARD RIDGE (MS100RS / MS150RS)

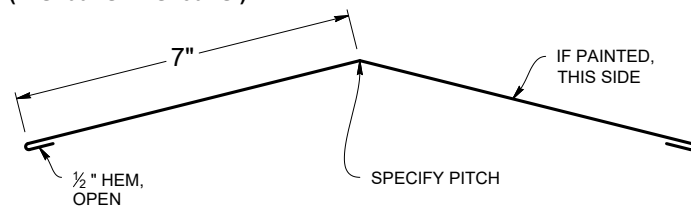


SCALE 1:4 S.O. 15" WEIGHT: 13.1 LBS.

WT RIDGE FULL VENTED (MS100WTRFV / MS150WTRFV)

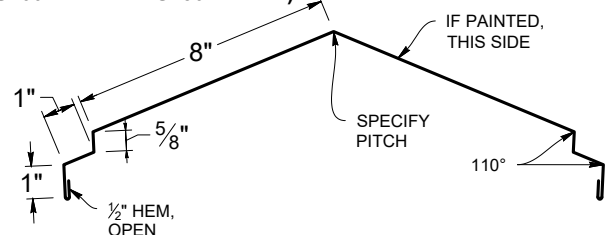


SCALE 1:6 S.O. 22.25" WEIGHT: 18.1 LBS.


VALLEY WIDE FLASHING (MS100VFW / MS150VFW)

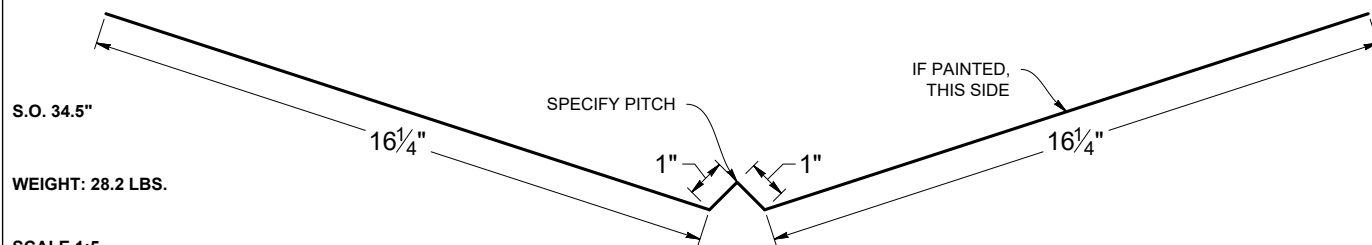


VALLEY FLASHING (MS100VF / MS150VF)

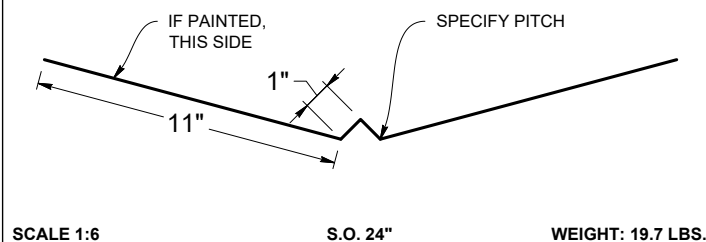


OFFSET CLEAT (MS100OC / MS150OC)




SIDEWALL (MS100SW / MS150SW)

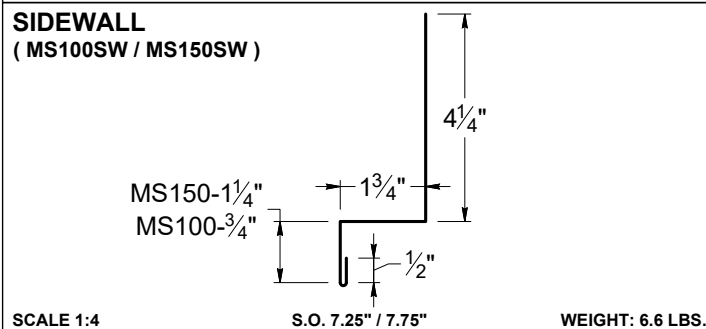


CURB SIDEWALL (MS100CSW / MS150CSW)

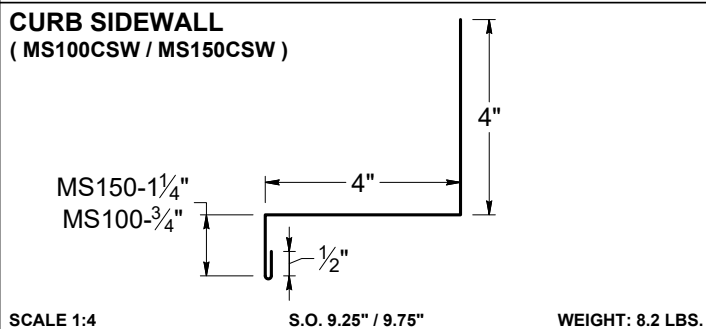


ENDWALL (MS100EW / MS150EW)

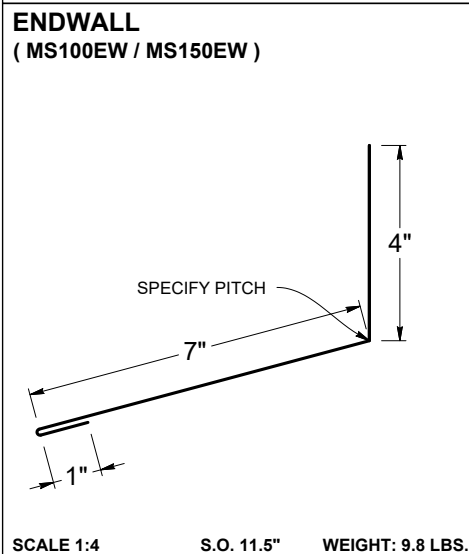

WT VENTED ENDWALL (MS100WTEWV / MS150WTEWV)

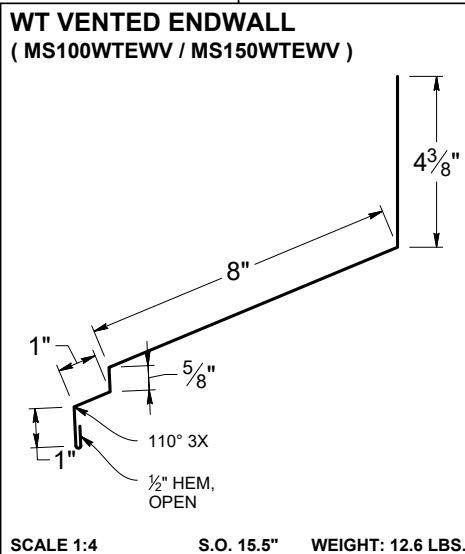

CURB ENDWALL (MS100CH / MS150CH)

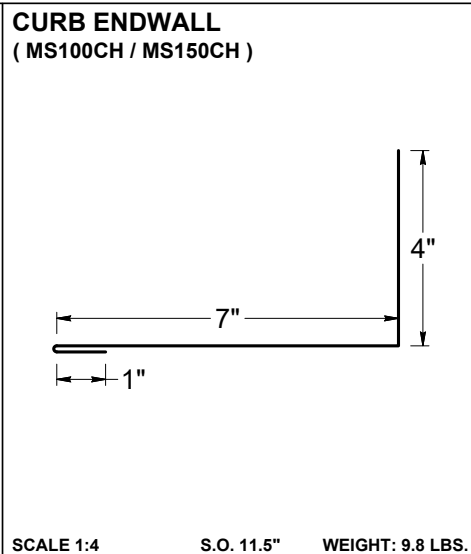


MS-100™/MS-150™ WTW

Flashing and Details Selection
Flashing: 10' Standard



BACK PAN (MS100PAN / MS150PAN)

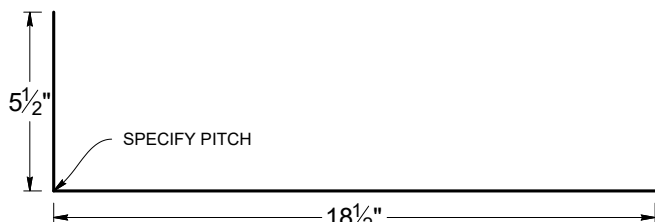


SCALE 1:6

S.O. 24"

WEIGHT: 21.3 LBS.

REGLET (MS100RF / MS150RF)




NON-VISIBLE /
SUB-FLASHINGS ARE NOT
PROVIDED IN SPECIFIC
COLORS UNLESS SPECIFIED

SCALE 1:3

S.O. 5.625"

WEIGHT: 4.6 LBS.

END DAM

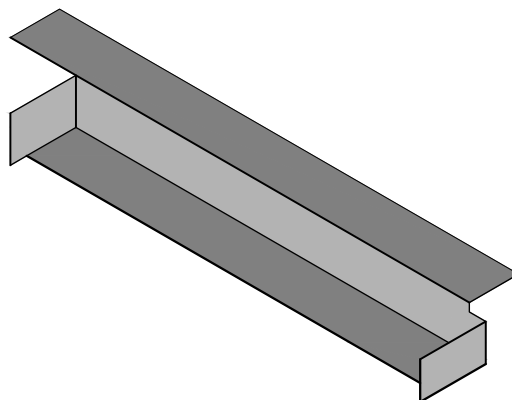


S.O. VARIES

WEIGHT: VARIES

PERFORATED VENT DRIP: E2886 EMBER RESISTANT (MS100PVD / MS150PVD)

NON-VISIBLE /
SUB-FLASHINGS
ARE NOT
PROVIDED IN
SPECIFIC COLORS
UNLESS SPECIFIED

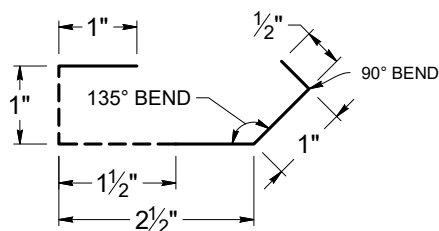


SCALE 1:2

S.O. 6"

WEIGHT: 4.88 LBS.

ZEE CLOSURE (MS100ZF / MS150ZF)

NON-VISIBLE / SUB-FLASHINGS
ARE NOT PROVIDED IN
SPECIFIC COLORS UNLESS
SPECIFIED




*HEIGHT ALLOWS
FOR DOUBLE BEAD
BUTYL TAPE

SCALE 1:3

S.O. 2.875"/3.375"

WEIGHT: 3 LBS.

OFFSET CLEAT (MS100OC / MS150OC)



SCALE 1:2

S.O. 3"

WEIGHT: 2.5 LBS.

Custom Trim Order



Customer Name: _____ Job Name: _____

Gauge: _____ Color: _____ Status: ☐ Original ☐ New

Specify: ☐ Angles ☐ Color Side ☐ Dimensions ☐ Stretchout

SO _____

Dwg #: _____ Pitch: _____ # of Pieces: _____

Description: _____

Hems: ☐ Open ☐ Closed ☐ Slightly Open

SO _____

Dwg #: _____ Pitch: _____ # of Pieces: _____

Description: _____

Hems: ☐ Open ☐ Closed ☐ Slightly Open

SO _____

Dwg #: _____ Pitch: _____ # of Pieces: _____

Description: _____

Hems: ☐ Open ☐ Closed ☐ Slightly Open

SO _____


Dwg #: _____ Pitch: _____ # of Pieces: _____

Description: _____

Hems: ☐ Open ☐ Closed ☐ Slightly Open

Please provide a drawing for each flashing with precise measurements and angles

Fax to: 503-581-6877

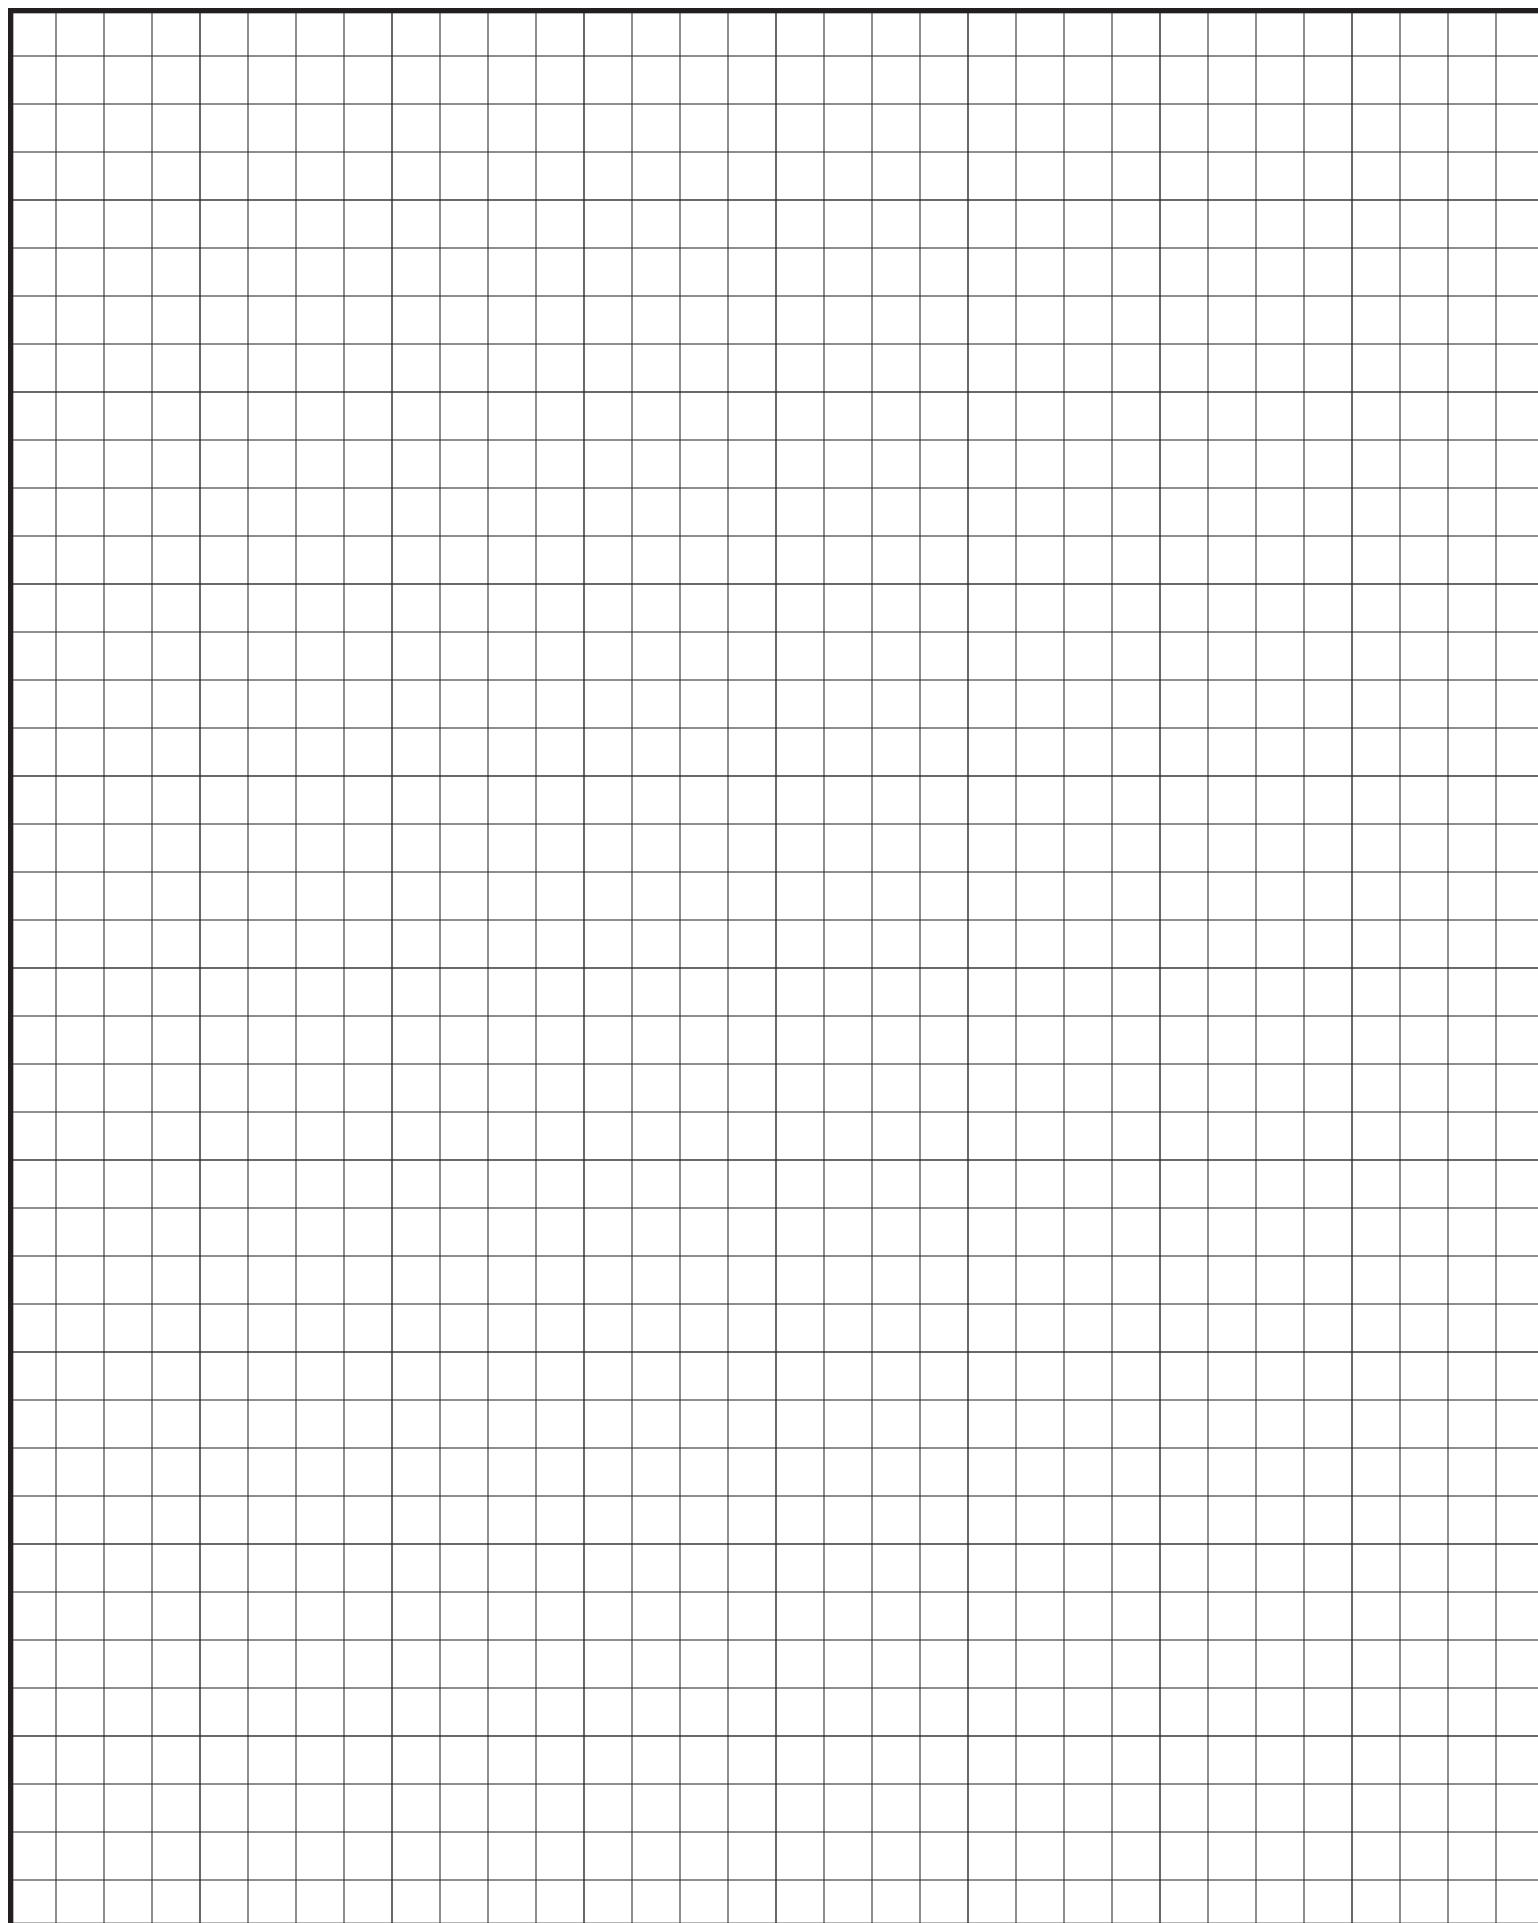



SALEM BRANCH

4566 Ridge Dr. NE
Salem, OR 97301

Office: 503-581-8338
Toll Free: 1-800-574-1388
Fax: 503-581-6877

SACRAMENTO BRANCH

3443 Airport Rd,
Sacramento, CA 95834

Office: 916-318-8844
Toll Free: 1-800-574-1388
Fax: 916-993-4123

SPOKANE BRANCH

1010 N Nelson St.,
Spokane, WA 99202
www.go-rsp.com

Office: 509-535-8667
Toll Free: 800-238-4057
Fax: 509-535-8682

AUBURN BRANCH

2601 C St SW,
Auburn, WA 98001

Office: 206-900-9923
Toll Free: 1-800-574-1388
Fax: 253-804-3545

RIVERSIDE BRANCH

4880 Felspar St.
Riverside, CA 92509

Office: 323-407-7457
Toll Free: 1-877-504-1594