




ROOF LAP DETAIL



WALL LAP DETAIL





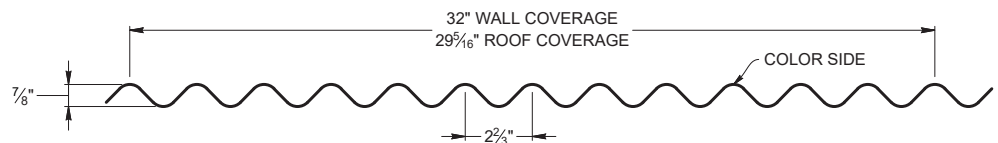ROOF & WALL PROFILE



KEY FEATURES

- 29, 26 and 24 Tru-Gauge™
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 45' (*For longer length panels, please inquire*)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Fiberglass panels available to match profile
- Manufactured in Spokane WA
- OverEZee™ Retro-fit systems available

TESTING


-  ICC EVALUATION SERVICE™ ICC-ESR #5045 & #5046 with CBC-CRC Supplement
-  Code compliance UL Evaluation Report UL ER #25913-01. Construction No. 649
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - ZINCALUME® Plus/Galvalume® AZ-50/55
- ASTM B209 - Aluminum Substrate

MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ Painted Steel .015" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 26 gauge ArmorTech™ Painted Steel .019" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 29 & 26 gauge bare ZINCALUME® Plus/ Galvanized® Plus (No finish warranty – 25 yr. perforation warranty)
- 29 & 26 gauge bare G-90 Galvanized (No finish warranty – 25 yr. perforation warranty)
- Zincalume and ZINCALUME® Plus is a registered trademark of Bluescope Ltd. Galvalume® Plus is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

FINISHES

- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

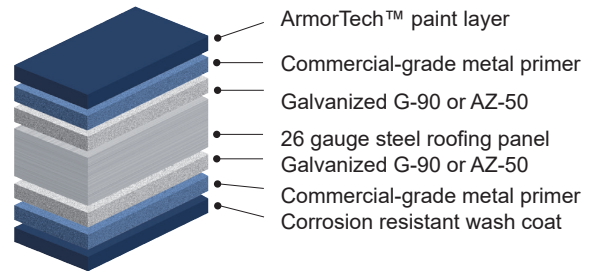

STANDARD ARMORTECH™ SMP COLORS

40-Year Residential Manufacturer's Limited Warranty



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing.***Oil Canning is not a cause for material rejection***



Rev. Date 04-26