

TAYLOR METAL PRODUCTS

HR-34™ CA
Roof & Wall


ICC EVALUATION SERVICE® **ICC-ES EVALUATION REPORT #5045 AND #5046 with CBC-CRC Supplement**

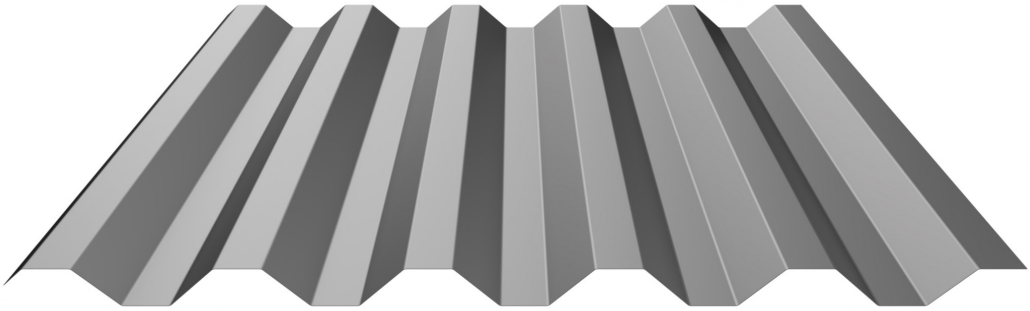


LAP DETAIL

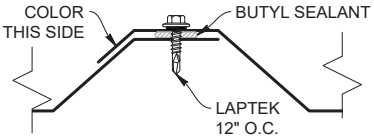


ROOF & WALL PROFILE

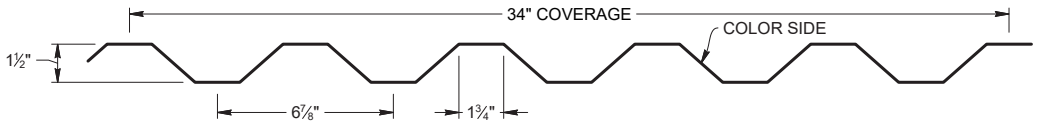

LAP DETAIL

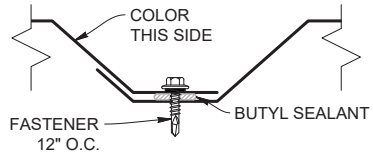

OPTIONAL WALL PROFILE

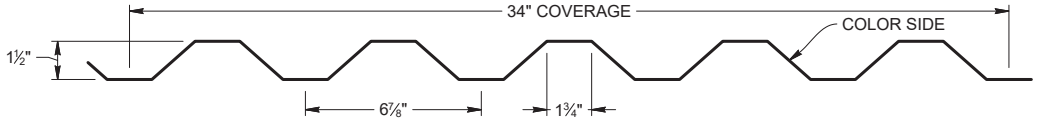

KEY FEATURES

- Manufactured in Riverside CA
- 24 and 22 Tru-Gauge™ and .032" Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040", .050" & .063" Aluminum (*please inquire*)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 20' 10" (*For longer length panels, please inquire*)
- Long length flashings available up to 20' 11" (*For longer length flashing, please inquire)*
- Aluminum recommended within 1000 ft of salt water (*not required*)
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Structural panel that will span up to 6'
- OverEZee™ Retro-fit systems available

TESTING

- ICC-ESR #5045 & #5046 with CBC-CRC Supplement
- Code compliance UL Evaluation Report UL ER #25913-01. Construction No. 137, 244
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate


TAYLOR METAL PRODUCTS

MATERIAL SPECIFICATIONS

- 24 & 22 Tru-Gauge™ Kynar 500® (PVDF) Painted Steel G-90 Galvanized or AZ-50 ZINCALUME®
- ✦.032" & .040" Kynar 500® (PVDF) Painted aluminum
- 24 & 22 Tru-Gauge™ bare ZINCALUME® Plus AZ-55 *(No finish warranty – 25 yr. perforation warranty)*
- 24 Tru-Gauge™ Bonderized
- 22 Tru-Gauge™ Rusteel Plus™ (A606)
- Custom 20 & 18 Tru-Gauge™ and .050" & .063" aluminum (*please inquire*)
- 16 & 20 oz. Copper (*Inquire for availability & price*)
- Kynar 500® (PVDF) and substrate testing data available (See website)
- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar®(PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.


FINISHES

- Limited Lifetime residential paint warranty
- 40 year commercial paint warranty
- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Materials
- Kynar 500® (PVDF) Paint System - the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- "Oil Canning" is an inherent characteristics of roof and wall products, and not a defect, which is not a cause for panel rejection.




STANDARD COOL KYNAR 500® COLORS


▲22 Tru-Gauge™ ✦.032 Aluminum

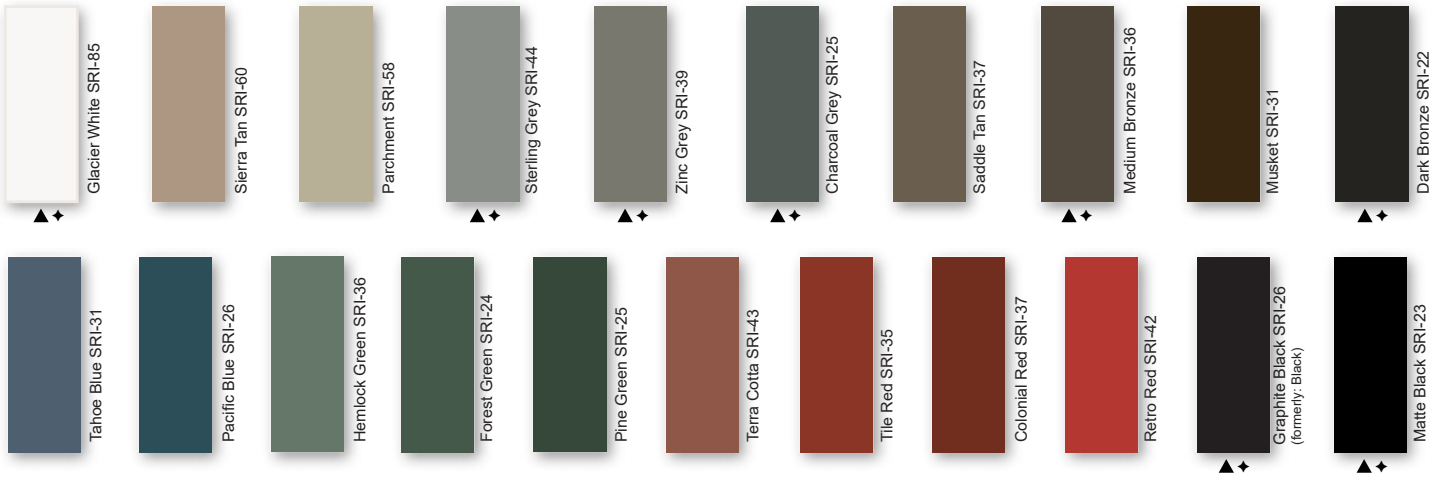

PREMIUM METALLIC COOL KYNAR® COLORS

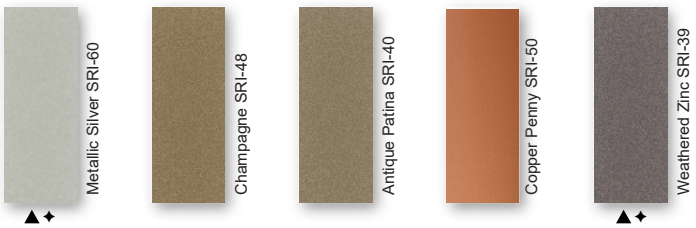

SPECIALIZED MATERIAL

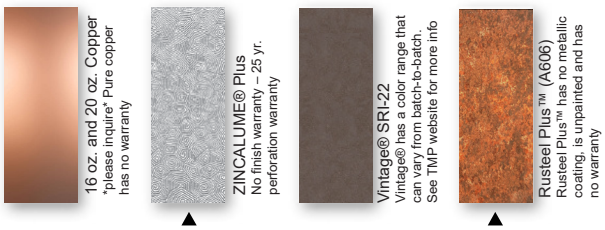

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
*SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.***Oil canning is not a cause for material rejection****

steelscape PPG ENERGY STAR CRRC MEMBER

Rev. Date 10-26