

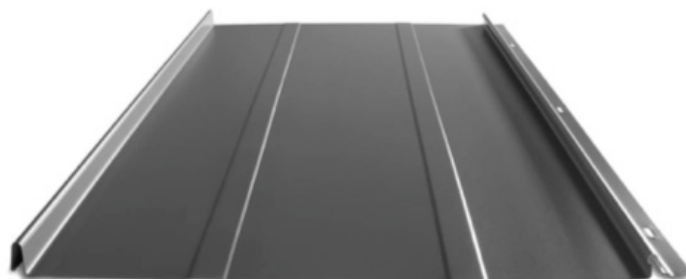


STRIATIONS



ACCENT RIBS 2 or 3 Ribs available

SEAM DETAIL

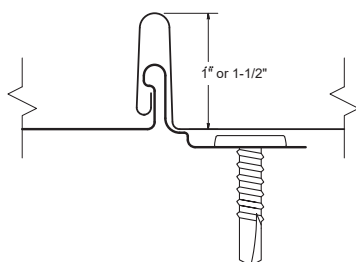

KEY FEATURES

- Standard width for Premier-Lock 100 is 15-3/4"
Standard width for Premier-Lock 150 is 14-3/4"
- 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum
- Factory-notched panels available
- Anti-Capillary dry lock seam
- Pre-slotted fasteners flange: allows expansion / contraction of panel
- Premier-Lock 100 - 1" rib height
- Premier-Lock 150 - 1-1/2" rib height
- Concealed fastener system
- 3:12 minimum pitch recommended
(For lower pitches please inquire)
- Standard panel lengths 2' to 35'
(For longer panels, please inquire)
- Panel options: Striations, Accent Ribs, and Flat Pan
- Manufactured in Sacramento CA & Riverside CA

TESTING

-  Code compliance UL Evaluation Report
UL ER #25913-01
 - UL Construction No. 589
 - UL 580 Class 90 - Wind Uplift
 - UL 790 Class A (ASTM E108) - Fire rated
 - UL 2218 Class 4 - Impact (hail) rated
 - ASTM A653/A924 - G90 Galvanized
 - ASTM A792 - Zincalume/Galvalume AZ-50/55
 - ASTM B209 - Aluminum Substrate
 - ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available
- (Premier-Lock™ 100 carries its UL Classification under the Easy-Lock™ profile designation)




The Premier-Lock™ Standing Seam has the anti-capillary dry lock seam. It's designed with softer, less industrial lines to provide a more architecturally pleasing appearance.

MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲22 Tru-Gauge™ Kynar 500® Painted Steel
- ♦.032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge™ bare Zincolume® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .040" Kynar 500® Painted Aluminum (please inquire)
- 24 Tru-Gauge™ Bonderized
- 16 OZ & 20 OZ Real Copper (please inquire)
- Kynar 500® and substrate testing data available (See website)
- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar® (PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. Zincolume & Zincolume® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.


FINISHES

- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Colors
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications
- “Oil Canning” is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection

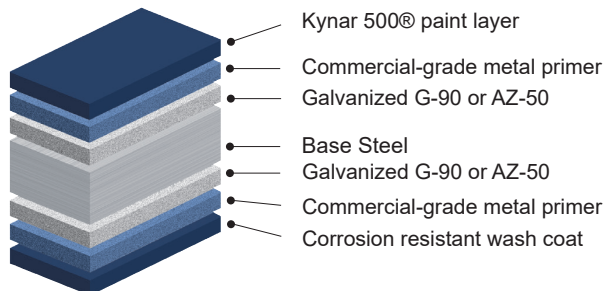


STANDARD COOL KYNAR 500® COLORS

▲22 Tru-Gauge™
♦.032 Aluminum

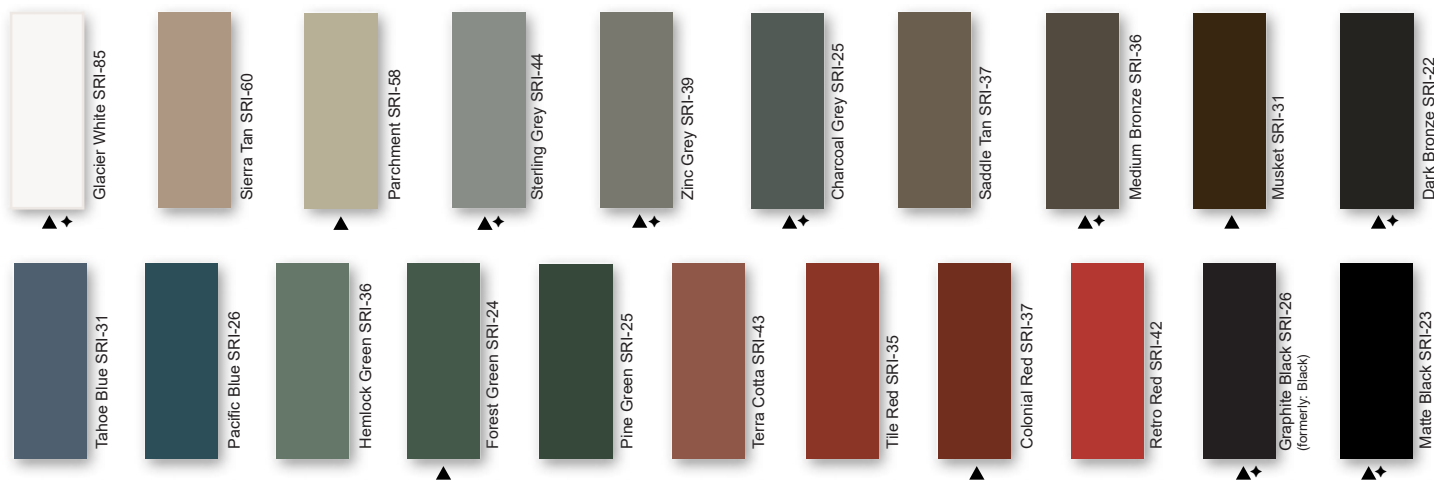

PREMIUM METALLIC COOL KYNAR® COLORS

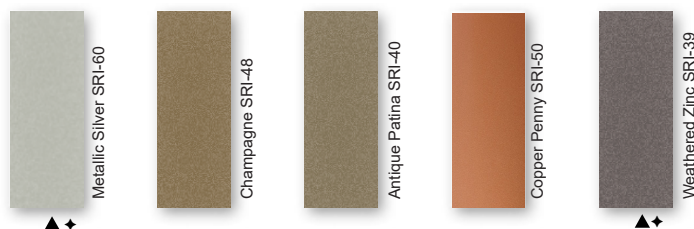

SPECIALIZED MATERIAL



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing. ***Oil canning is not a cause for material rejection***



Rev. Date 10-25