




16" coverage options

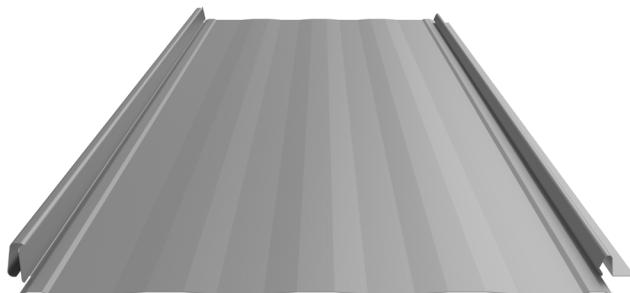

STRIATIONS

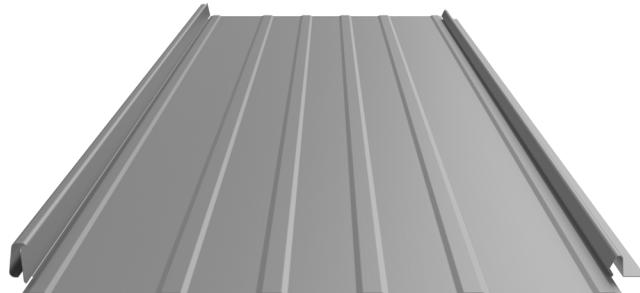


ACCENT RIBS

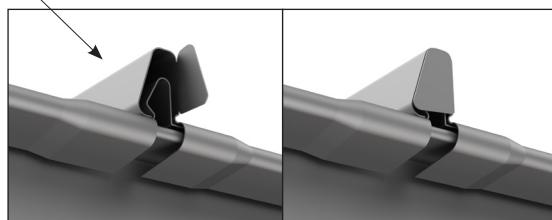


Tabbing feature can help minimize debris from entering in between seams, and gives a more finished appearance.

LOCK SEAM DETAIL

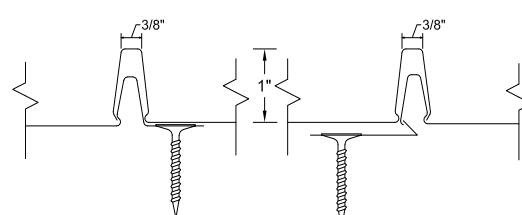

REVERSE LAP DETAIL

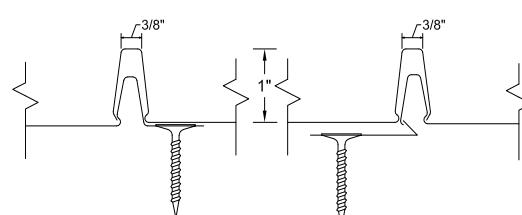

KEY FEATURES

- 16" Coverage Option
- 26 Tru-Gauge™ ArmorTech™ SMP Painted Steel
- Factory-notched and tabbed panels available
- Vertical interlocking application: allows installation from both directions starting at any location
- Patented no-siphon lock seam
- 1" vertical rib with 3/8" flat top for ease of flashing attachment
- Concealed fasteners: fasteners cannot leak
- Pre-slotted fastener flange: allows expansion / contraction of panel (high wind clips available for panel lengths over 35 ')
- 3:12 minimum pitch recommended
(*For lower pitches, please inquire*)
- Standard panel lengths 4' to 35' - not notched
Standard panel lengths 1' to 35' - notched and tabbed
(*For longer panels, please inquire*)
- Manufactured in Salem OR, Auburn WA, Sacramento CA and Riverside CA
- Panel options: Striations and Accent Ribs

TESTING

-  Code compliance UL Evaluation Report
UL ER #25913-01
- UL Construction No. 529
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available



The StreamLine™ Standing Seam is the only metal roofing panel with a patented no-siphon dry lock seam, with a unique reversing feature to allow installation of panels from both directions starting at any location. The panel is designed with softer, less industrial lines to provide an architecturally pleasing appearance.


MATERIAL SPECIFICATIONS

- 26 gauge ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 26 gauge bare Zincalume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 26 gauge bare G-90 Galvanized (No finish warranty – no perforation warranty)
- Zincalume & Zincalume® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

Standard Weight				
Width	Gauge	Color	LBS SQFT	LBS LF
16"	26	ArmorTech	1.054	1.402

FINISHES

- 18 Standard Colors, Zincalume® Plus, and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

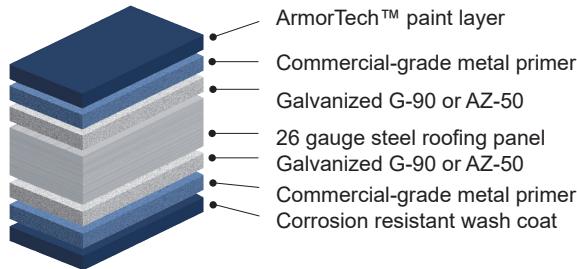

40-Year Residential Manufacturer's Limited Warranty

STANDARD COOL ARMORTECH™ SMP COLORS



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***



Rev. Date 02-26