



16" coverage options

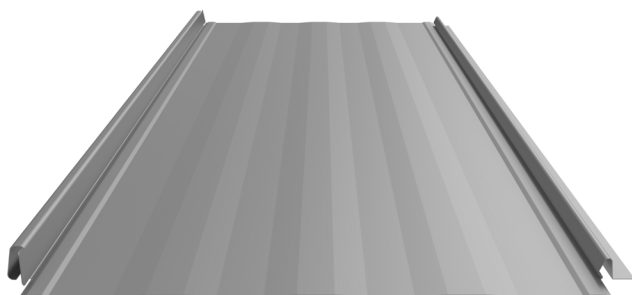


STRIATIONS

Best choice to help mitigate oil canning

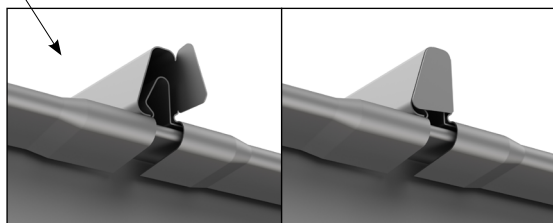


Tabbing feature can help minimize debris from entering in between seams, and gives a more finished appearance.

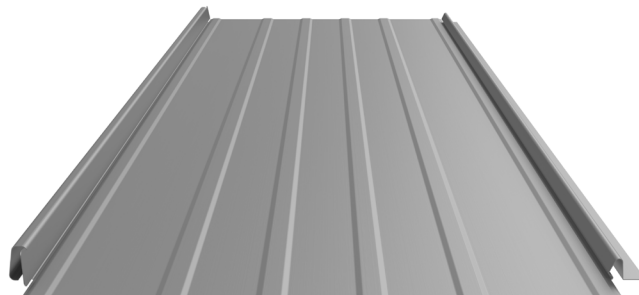

ACCENT RIBS

LOCK SEAM DETAIL

REVERSE LAP DETAIL

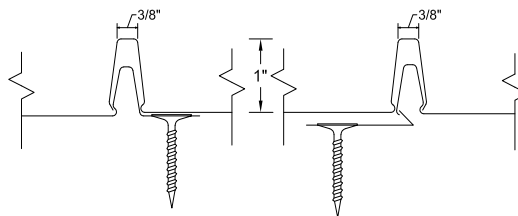

KEY FEATURES

- Manufactured in Salem, OR, Auburn, WA, Sacramento, CA and Riverside, CA
- 16" coverage options
- 1" rib height with 3/8" flat top for ease of flashing attachment
- 26 Tru-Gauge™ ArmorTech™ SMP Painted Steel
- Aluminum recommended within 1000 ft of salt water (*not required*)
- 3' to 35' panel lengths
(*Inquire for longer panel lengths*)
- Panel options: Striations and Accent Ribs
- 3:12 minimum pitch recommended
(*Inquire for lower pitches*)
- Factory-notched and tabbed panels available
- Pre-slotted fastener flange: allows expansion & contraction of panel (high wind clips available for panel lengths over 35')
- Vertical interlocking application: allows installation from both directions starting at any location
- Patented no-siphon lock seam
- Concealed fasteners: fasteners cannot leak

TESTING

-  Code compliance UL Evaluation Report UL ER #25913-01
- UL Construction No. 529
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G-90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume® AZ-50/55
- ASTM B209 - Aluminum Substrate
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available



The StreamLine™ Standing Seam is the only metal roofing panel with a patented no-siphon dry lock seam, with a unique reversing feature to allow installation of panels from both directions starting at any location. The panel is designed with softer, less industrial lines to provide an architecturally pleasing appearance.


MATERIAL SPECIFICATIONS

- 26 Tru-gauge™ ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 26 Tru-gauge™ bare ZINCALUME® Plus AZ-55 (*No finish warranty – 25 yr. perforation warranty*)
- 26 Tru-gauge™ bare G-90 Galvanized (*No finish warranty – no perforation warranty*)
- ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

Standard Weight				
Width	Gauge	Color	LBS SQFT	LBS LF
16"	26	ArmorTech	1.054	1.402


FINISHES

- 18 Standard Colors, ZINCALUME® Plus, and G-90 Galvanized
- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

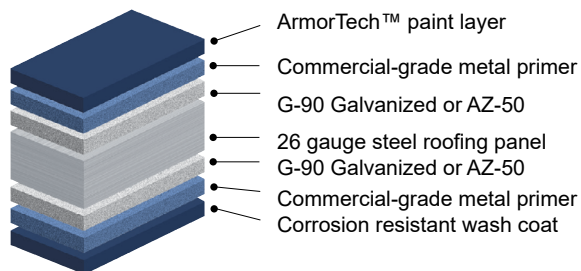

40-Year Residential Manufacturer's Limited Warranty

STANDARD ARMORTECH™ SMP COLORS

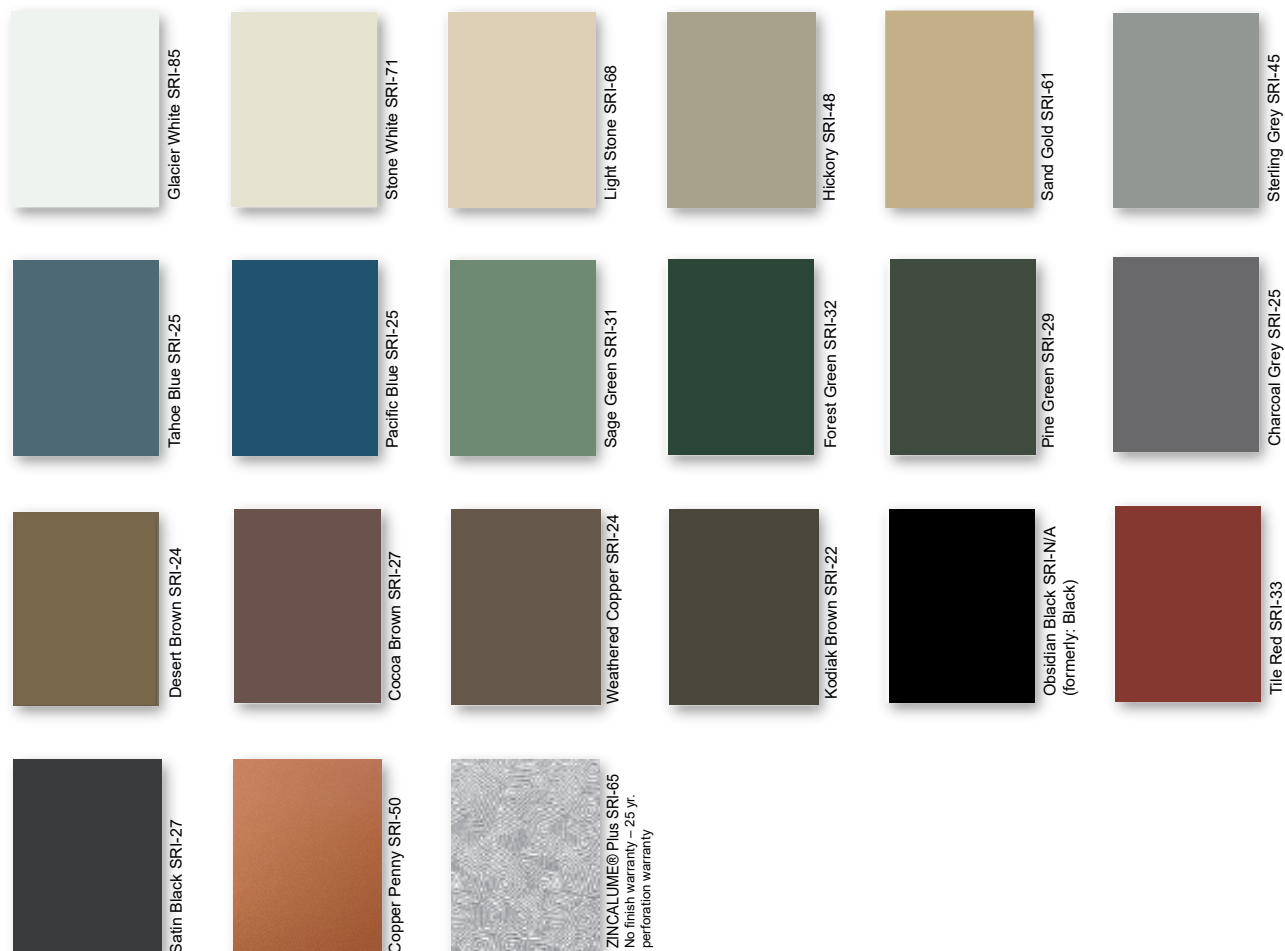

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***



Rev. Date 08-26