

TAYLOR METAL PRODUCTS

Tuff Rib
Roof & Wall



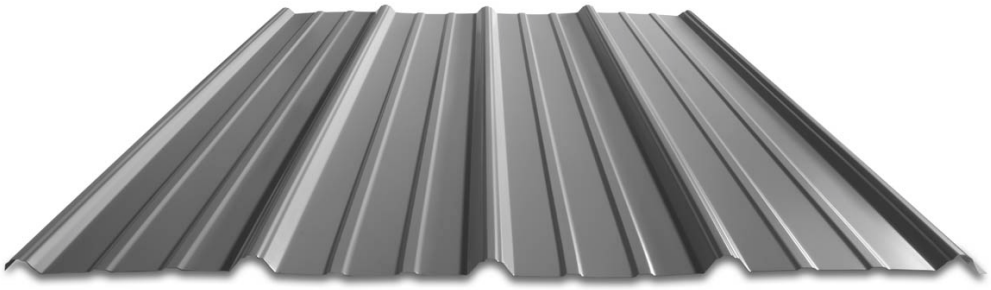

ROOF & WALL PROFILE LAP

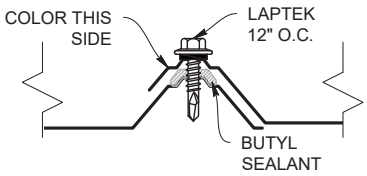

ROOF & WALL PROFILE



KEY FEATURES

- Manufactured in Salem OR and Riverside CA
- 29 and 26 Tru-Gauge™
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1’ to 45’ (*For longer length panels, please inquire*)
- Long length flashings available up to 20’ 11” (*for longer length flashing, please inquire)*
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Fiberglass & Polycarbonate panels available to match profile
- OverEZee™ Retro-fit systems available

TESTING

- Code compliance UL Evaluation Report UL ER #25913-01
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume AZ-50/55
- ASTM E455-19 - Shear and Diaphragm. *(For engineering data, please inquire)*

TAYLOR METAL PRODUCTS


MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ Painted Steel .015" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 26 gauge ArmorTech™ Painted Steel .019" (Thickness prior to painting) G-90 Galvanized or AZ-50
- 29 & 26 gauge bare ZINCALUME® Plus AZ-55 *(No finish warranty – 25 yr. perforation warranty)*
- 29 & 26 gauge bare G-90 Galvanized *(No finish warranty – 25 yr. perforation warranty)*

- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar®(PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

KEY FEATURES

- 21 Standard Colors, ZINCALUME® and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
  - fading
  - chalking
  - chipping
  - cracking
  - peeling



40-Year Residential Manufacturer's Limited Warranty

STANDARD COOL ARMORTECH™ SMP COLORS

Polar White SRI-90 *(new color, inquire)*
Glacier White SRI-85
Stone White SRI-71
Ivory SRI-68
Light Stone SRI-68
Sandstone SRI-55
Hickory SRI-48
Ash Grey SRI-58
Sand Gold SRI-61
Desert Brown SRI-24
Cocoa Brown SRI-27
Kodiak Brown SRI-22
Weathered Copper SRI-24
Obsidian Black SRI-NA
Sterling Grey SRI-45
Charcoal Grey SRI-25
Sage Green SRI-31
Forest Green SRI-32
Pine Green SRI-29
Tahoe Blue SRI-25
Pacific Blue SRI-25
Tile Red SRI-32
Copper Penny SRI-60
Satin Black SRI-27
ZINCALUME® Plus SRI-65 No finish warranty – 25 yr. perforation warranty
Galvanized G-90 No finish warranty – no perforation warranty

These printed chips provide a close representation of the colors.
Metal samples are available upon request.
Coatings are low gloss 10-15% sheen.
*SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing.***Oil Canning is not a cause for material rejection****

steelscape PPG ENERGY STAR

Rev. Date 10-26