


# Versa Span TM STANDING SEAM



\*wide batten options

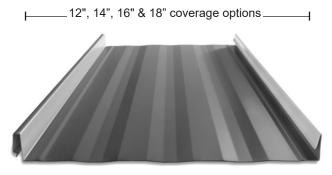

### **STRIATIONS**



**FLAT PAN** 



**FLAT ACCENT RIBS** 

2 Accent ribs for 12" & 14" panels 3 Accent ribs for 16" & 18" panels




# **KEY FEATURES**

- 12", 14", 16" & 18" coverage options
- 24 and 22 Tru-Gauge<sup>™</sup> and .032" and .040 Aluminum
- Floating clip system: allows for expansion and contraction of panels in longer lengths
- 1-3/4" vertical rib, factory notching available
- 2:12 minimum pitch recommended (For lower pitches, please inquire)
- Standard panel lengths 1' to 60' (For longer length panels, please inquire)
- · On-site roll forming available for longer panels
- · Factory injected Butyl sealant available
- Clip Relief is not standard, available upon request
- Wide Batten incorporates nicely over Versa-Span<sup>™</sup> standing seam panel (separate clip required)
- Weathertightness warranty available (Contact TMP representative for details)
- · Manufactured in Salem OR

# **TESTING**





- UL Construction No. 254, 255, 261, 303, 342, 343, 414, 436, 445, 447, 448, 486, 508, 508A, 543, 544
- · UL 580 Class 90 Wind Uplift
- UL 790 Class A (ASTM E108) Fire rated
- · UL 2218 Class 4 Impact (hail) rated
- ASTM E1680 Air infiltration (roof)
- · ASTM E1646 Water infiltration (roof)
- · ASTM E1592 Structural uniform static air pressure
- ASTM E1514 Standard for Structural Standing steel roof panels systems.
- · ASTM E331 Water infiltration (wall)
- ASTM E283 Air infiltration (wall)
- ASTM A653/A924 G90 Galvanized
- ASTM A792 Zincalume/Galvalume AZ-50/55
- · ASTM B209 Aluminum Substrate
- ASTM E2886 Ember Resistant ridge/endwall/peak flashings available




# MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲ 22 Tru-Gauge<sup>™</sup> Kynar 500® Painted Steel
- .032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge™ bare Zincalume® Plus AZ-55 (No finish warranty 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .040" Kynar 500® Painted Aluminum (please inquire)
- 24 Tru-Gauge™ Bonderized
- 22 gauge Rusteel Plus™ (A606)
- Custom 20 & 18 Tru-Gauge™ and .050" and .063" Aluminum (please inquire)
- 16 OZ & 20 OZ Real Copper (please inquire)
- Kynar 500® and substrate testing data available (See website)
- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar®(PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. Zincalume & Zincalume® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema. Inc.


## **FINISHES**

- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Colors
- Kynar 500® Paint System the ultimate in exterior durability and color retention
- "Cool" color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications


"Oil Canning" is an inherent characterisite of roof and wall products, and not a defect, which is not a cause for panel rejection

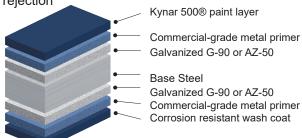

### STANDARD COOL KYNAR 500® COLORS

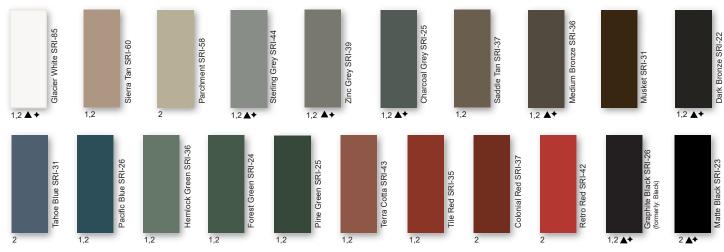

### PREMIUM METALLIC COOL KYNAR® COLORS

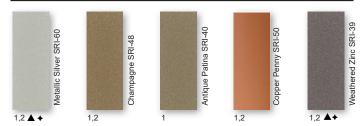

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.\*\*\*Oil canning is not a cause for material rejection\*\*



SPECIALIZED MATERIAL

Copper



steelscape











Rev. Date 10-25