



**STRIATIONS**

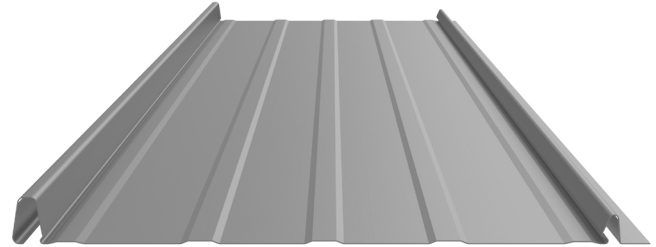


**ACCENT RIBS**

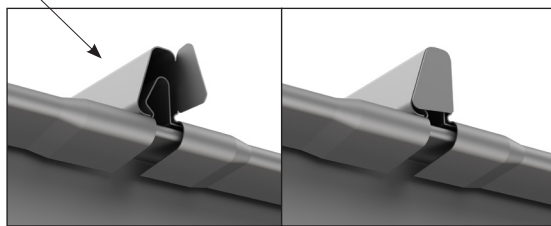

Tabbing feature can help minimize debris from entering in between seams, and gives a more finished appearance.

**LOCK SEAM DETAIL**


**REVERSE LAP DETAIL**

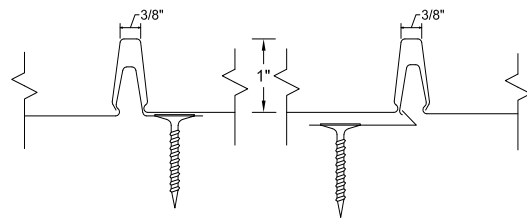

## KEY FEATURES

- 12" Coverage Option
- 26 Tru-Gauge™ ArmorTech™ SMP Painted Steel
- Factory-notched and tabbed panels available
- Vertical interlocking application: allows installation from both directions starting at any location
- Patented no-siphon lock seam
- 1" vertical rib with 3/8" flat top for ease of flashing attachment
- Concealed fasteners: fasteners cannot leak
- Pre-slotted fastener flange: allows expansion / contraction of panel (high wind clips available for panel lengths over 35')
- 3:12 minimum pitch recommended  
(For lower pitches, please inquire)
- Standard panel lengths 4' to 35' - not notched  
Standard panel lengths 1' to 35' - notched and tabbed  
(For longer panels, please inquire)
- Manufactured in Auburn WA
- Panel options: Striations and Accent Ribs

## TESTING

-  Code compliance UL Evaluation Report  
UL ER #25913-01
- UL Construction No. 529
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - ZINCALUME/Galvalume AZ-50/55
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available



The StreamLine™ Standing Seam is the only metal roofing panel with a patented no-siphon dry lock seam, with a unique reversing feature to allow installation of panels from both directions starting at any location. The panel is designed with softer, less industrial lines to provide an architecturally pleasing appearance.


## MATERIAL SPECIFICATIONS

- 26 gauge ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 26 gauge bare ZINCALUME® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- ZINCALUME & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

Standard Weight				
Width	Gauge	Color	LBS SQFT	LBS LF
12"	26	ArmorTech	1.054	1.76

## FINISHES

- 14 Standard Colors, ZINCALUME® Plus
- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
  - fading
  - chalking
  - chipping
  - cracking
  - peeling

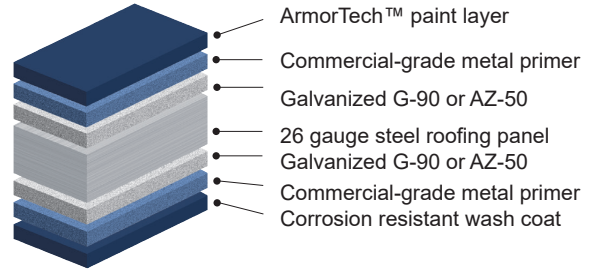

### 40-Year Residential Manufacturer's Limited Warranty

## STANDARD ARMORTECH™ SMP COLORS



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. \*\*\*Oil Canning is not a cause for material rejection\*\*\*



Rev. Date 05-26