



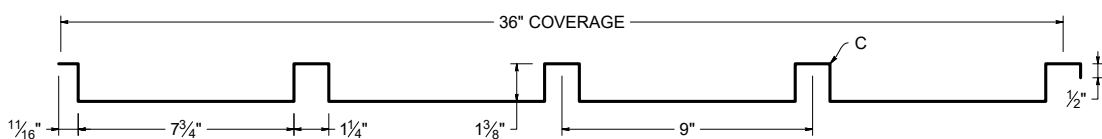



ICC
EVALUATION
SERVICE®

ICC-ES EVALUATION REPORT #5045 with CBC-CRC Supplement (Siding only)

ROOF LAP DETAIL



WALL LAP DETAIL

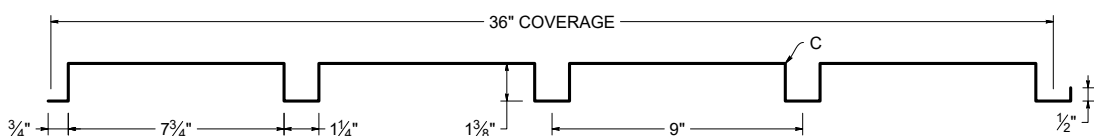

KEY FEATURES

- 24, 22 Tru-Gauge™ and .032" Aluminum
- Custom 20 & 18 Tru-Gauge™ and .040" Aluminum (please inquire)
- 1:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 2' to 20' 10"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Manufactured in Salem OR, Sacramento CA, and Riverside CA
- OverEZee™ Retro-fit systems available

TESTING

-  ICC-ESR #5045 with CBC-CRC Supplement (Siding only)
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1592 - Structural uniform static air pressure (Siding only)
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM B209 - Aluminum Substrate

WEIGHT CHART

TMP-10 DELTA	WIDTH	24 GA STEEL	22 GA STEEL	.032 ALUM	.040 ALUM
THICKNESS		0.0236"	0.0285"	0.032"	0.040"
WEIGHT/LINFT	36"	3.851 LBS.	4.651 LBS	1.825 LBS	2.281 LBS
WEIGHT/LSQFT	36"	1.284 LBS	1.550 LBS	0.608 LBS	0.760 LBS

ASTM E 1680/E283 Air Penetration	ASTM E 1646/E331 Water Penetration
25 PSF<0.01 CFM/ft²-PASS	50 PSF - PASS

NEGATIVE LOAD CHART WITH 2 SCREWS


				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)								
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Negative Load								
				I _{xx} in ⁴ /ft.	I _{xx} (eff) in ⁴ /ft.	S _{xx} in ³ /ft.	I _{xx} in ⁴ /ft.	I _{xx} (eff) in ⁴ /ft.	S _{xx} in ³ /ft.	1'	1.5'	2'	2.5'	3'	3.5'	4'	4.5'	5'
36	24	50	1.28	0.0503	0.0604	0.0700	0.0853	0.0752	0.0795	115.0	105.3	95.6	85.9	76.3	66.6	56.9	47.2	37.5
36	22	50	1.51	0.0633	0.0758	0.0905	0.1067	0.0942	0.0993	125.0	114.1	103.1	92.2	81.3	70.3	59.7	48.4	37.5
36	20	33	1.84	0.0900	0.1026	0.1181	0.1333	0.1207	0.1286	125.0	114.1	103.1	92.2	81.3	70.3	59.7	48.4	37.5
36	18	33	2.39	0.1333	0.1449	0.1563	0.1733	0.1617	0.1663	125.0	114.1	103.1	92.2	81.3	70.3	59.7	48.4	37.5

- Theoretical section properties for still panels have been calculated per AISI S100 Specifications for Design of Cold-Formed Steel Structural Members.
- Charted Load/Span values are based on ASTM E1592-05, divided by a 2.00 Factor-of-Safety.
- Minimum recommended substrate (structure) recommendations:
 - Open-Framing (i.e. purlins)-16ga (design thickness 0.0566")
 - Plywood/OSB-15/32" or thicker is recommended to assure an effective degree of fastener thread engagement.
 - METAL DECK - 22ga (design thickness 0.0283")


POSITIVE LOAD CHART WITH 2 SCREWS

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)									
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Positive Load									
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
36	24	50	1.28	0.0503	0.0604	0.0700	0.0853	0.0752	0.0795	554.6	277.3	184.9	109.4	70.0	48.6	35.7	27.3	21.6	17.5
36	22	50	1.51	0.0633	0.0758	0.0905	0.1067	0.0942	0.0993	759.6	379.55	251.39	141.4	90.5	62.9	46.17	35.4	27.9	22.6
36	20	33	1.84	0.0900	0.1026	0.1181	0.1333	0.1207	0.1286	764.6	382.27	216.52	121.8	78.0	54.1	39.8	30.5	24.1	19.5
36	18	33	2.39	0.1333	0.1449	0.1563	0.1733	0.1617	0.1663	1319.1	644.7	286.6	161.2	103.16	71.6	52.63	40.3	31.8	25.8

- Theoretical section properties for Steel panel have been calculated per 2020 AISI S100 North America Specifications for the Design of Cold-Formed Steel Structural Member.
- Allowable loads for Steel panels are calculated in accordance with 2020 AISI S100 specifications considering bending, shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
- When panels are installed over solid or closely fitted sheathing, the capacity is limited to the capacity of the underlying sheathing.

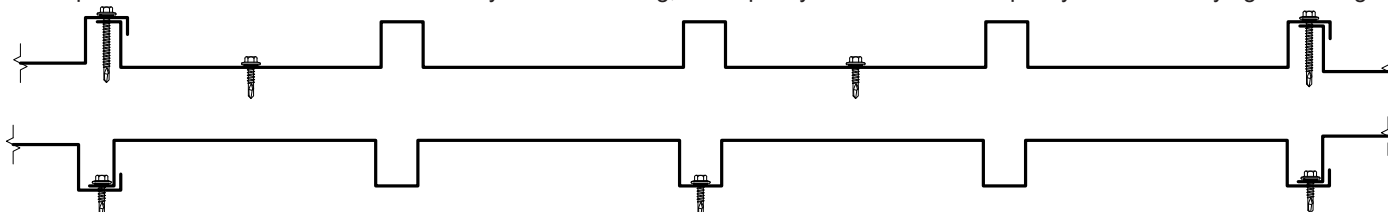

PANEL ATTACHMENT

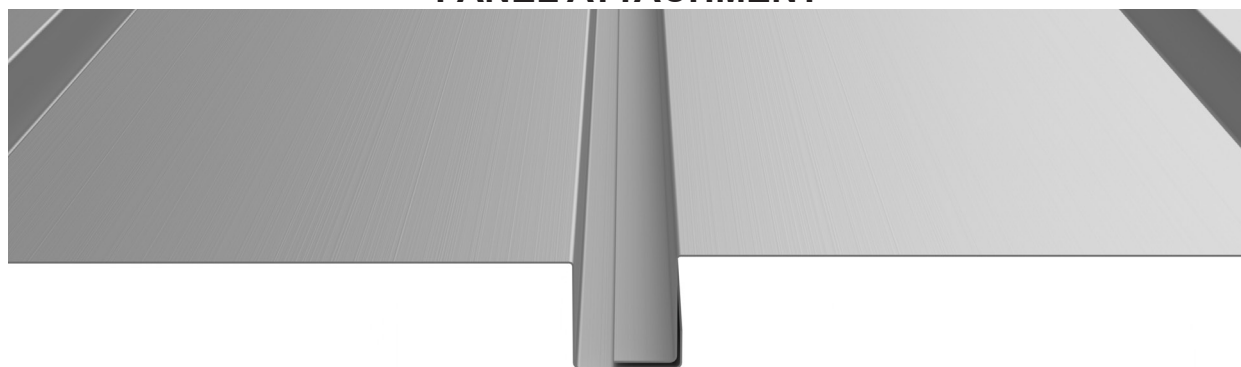

Fastener Notes:

- When possible, lap panels away from prevailing wind direction.
- 15/32" OSB: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- 15/32" Plywood: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- Dimensional lumber: #10 GP. Screws should penetrate the lumber 1".
- 16GA (or less) steel furring: #12 Fastener with DP-1
- Sidelaps fasten with #14 LapTek screws.
- All trim screws used for roof or wall applications should have EPDM sealing washers.
- Fastener spacing is based on project specific structural requirements. Consult a licensed engineer.

NEGATIVE LOAD CHART WITH 4 SCREWS


				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)								
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Negative Load								
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	1.5'	2'	2.5'	3'	3.5'	4'	4.5'	5'
36	24	50	1.28	0.0503	0.0604	0.0700	0.0853	0.0752	0.0795	200.0	185.0	170.0	155.0	140.0	125.0	110.0	95.0	80.0
36	22	50	1.51	0.0633	0.0758	0.0905	0.1067	0.0942	0.0993	185.0	168.1	151.3	134.4	117.5	100.6	83.8	66.9	50.0
36	20	33	1.84	0.0900	0.1026	0.1181	0.1333	0.1207	0.1286	185.0	168.1	151.3	134.4	117.5	100.6	83.8	66.9	50.0
36	18	33	2.39	0.1333	0.1449	0.1563	0.1733	0.1617	0.1663	185.0	168.1	151.3	134.4	117.5	100.6	83.8	66.9	50.0

- Theoretical section properties for still panels have been calculated per AISI S100 Specifications for Design of Cold-Formed Steel Structural Members.
- Charted Load/Span values are based on ASTM E1592-05, divided by a 2.00 Factor-of-Safety.
- Minimum recommended substrate (structure) recommendations:
 - Open-Framing (i.e. purlins)-16ga (design thickness 0.0566")
 - Plywood/OSB-15/32" or thicker is recommended to assure an effective degree of fastener thread engagement.
 - METAL DECK - 22ga (design thickness 0.0283")


POSITIVE LOAD CHART WITH 4 SCREWS

				SECTION PROPERTIES						ALLOWABLE UNIFORM LOADS, psf For various clip spacings (i.e. span values)									
Width, in.	Gauge	Yield ksi	Weight psf	Top in Compression			Bottom in Compression			Positive Load									
				I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	I_{xx} in ⁴ /ft.	I_{xx} (eff) in ⁴ /ft.	S_{xx} in ³ /ft.	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
36	24	50	1.28	0.0503	0.0604	0.0700	0.0853	0.0752	0.0795	554.6	277.3	184.9	109.4	70.0	48.6	35.7	27.3	21.6	17.5
36	22	50	1.51	0.0633	0.0758	0.0905	0.1067	0.0942	0.0993	759.6	379.55	251.39	141.4	90.5	62.9	46.17	35.4	27.9	22.6
36	20	33	1.84	0.0900	0.1026	0.1181	0.1333	0.1207	0.1286	764.6	382.27	216.52	121.8	78.0	54.1	39.8	30.5	24.1	19.5
36	18	33	2.39	0.1333	0.1449	0.1563	0.1733	0.1617	0.1663	1319.1	644.7	286.6	161.2	103.16	71.6	52.63	40.3	31.8	25.8

- Theoretical section properties for Steel panel have been calculated per 2020 AISI S100 North America Specifications for the Design of Cold-Formed Steel Structural Member.
- Allowable loads for Steel panels are calculated in accordance with 2020 AISI S100 specifications considering bending , shear, combined bending and shear and deflection. Allowable load considers a 3 or more equal span condition.
- When panels are installed over solid or closely fitted sheathing, the capacity is limited to the capacity of the underlying sheathing.

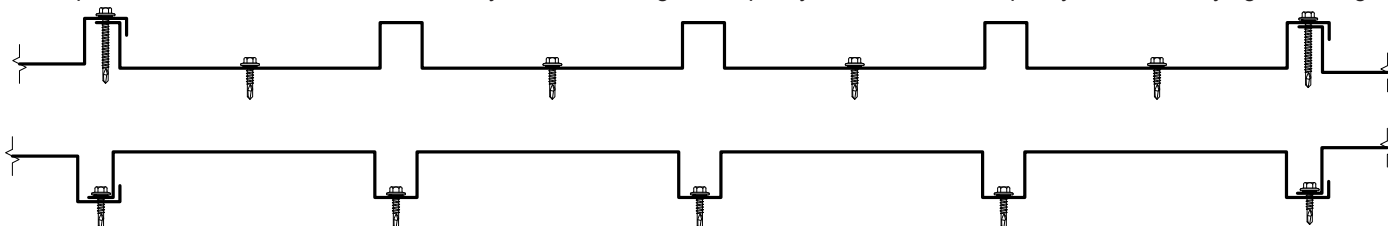

PANEL ATTACHMENT

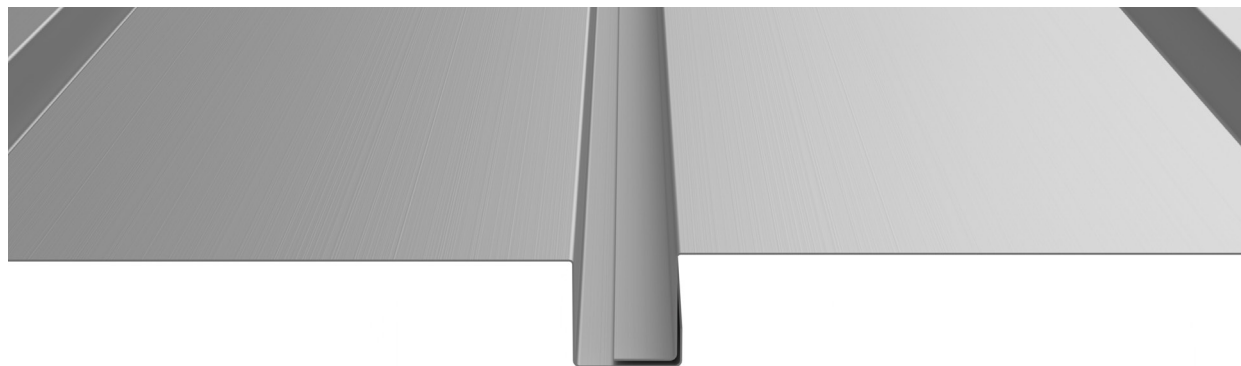

Fastener Notes:

- When possible, lap panels away from prevailing wind direction.
- 15/32" OSB: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- 15/32" Plywood: #14 GP Neoprene Washered fastener. Screws should be long enough to penetrate through the bottom of the plywood by 3/8".
- Dimensional lumber: #10 GP. Screws should penetrate the lumber 1".
- 16GA (or less) steel furring: #12 Fastener with DP-1
- Sidelaps fasten with #14 LapTek screws.
- All trim screws used for roof or wall applications should have EPDM sealing washers.
- Fastener spacing is based on project specific structural requirements. Consult a licensed engineer.

Rev Date: 02-26