


KEY FEATURES

- Manufactured in Spokane, WA
- 16" panel coverage
- 7/8" rib height
- 26 & 24 Tru-Gauge™ steel
- Aluminum recommended within 1000 ft of salt water (*not required*)
- 3' to 40' panel lengths (*Inquire for shorter or longer panels*)
- Panel options: Accent Ribs
- 3:12 minimum pitch recommended (*Inquire for lower pitches*)
- Concealed fasteners: fasteners cannot leak
- Snap lock rib — no mechanical seaming
- Made from high-tensile steel for superior load capacity
- All painted materials have corrosion resistant metallic finish under the primer and topcoat
- Interlocking rib with mastic recess insures a positive lock and a weathertight seal
- ArmorTech™ SMP paint system with a 40 year written paint warranty

TESTING

- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available

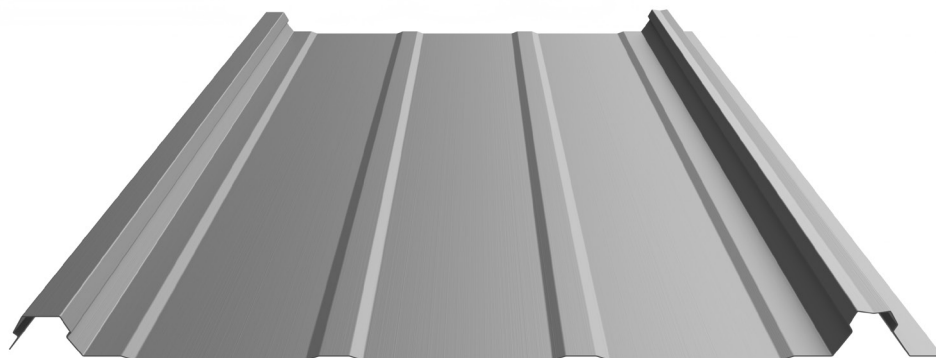


Each Loc-Rib™ panel snaps securely over the adjacent panel, eliminating the use of unsightly exposed fasteners. Loc-Rib™ panels are a snap to install and our design ensures that they stay locked without a need for “extras,” such as seaming tools, washers or clips!

MATERIAL SPECIFICATIONS

- 24 Tru-gauge™ Kynar 500® (PVDF) Painted Steel (*inquire*)
- 26 Tru-gauge™ bare ZINCALUME® Plus AZ-55 (*No finish warranty – 25 yr. perforation warranty*)
- 26 Tru-gauge™ bare G-90 Galvanized (*No finish warranty – no perforation warranty*)
- 26 Tru-gauge™ ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50

FINISHES

- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

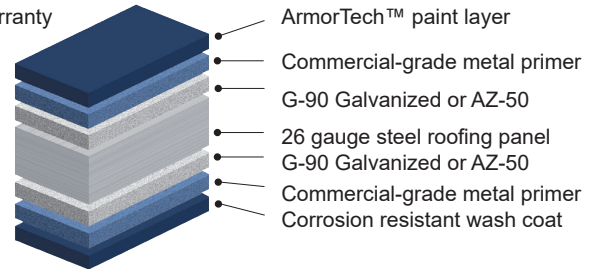

STANDARD ARMORTECH™ SMP COLORS

40-Year Residential Manufacturer's Limited Warranty



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***



Rev. Date 08-26