

TAYLOR METAL PRODUCTS

Rolled-Rib™ Roof & Wall



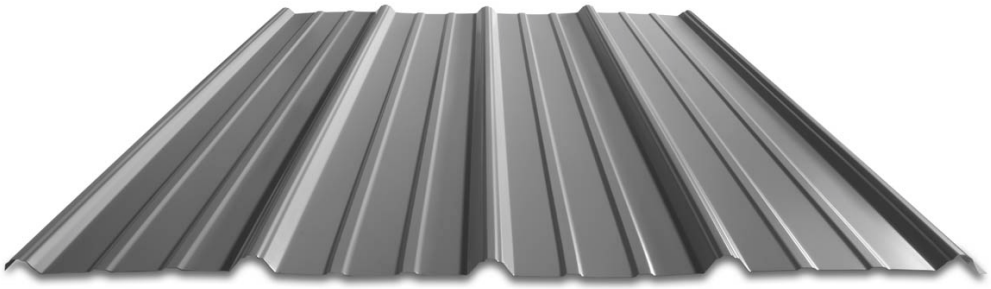

ROOF & WALL PROFILE LAP

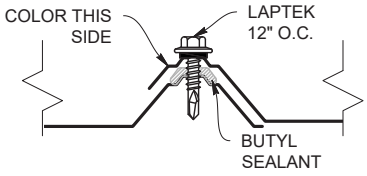

ROOF & WALL PROFILE



KEY FEATURES

- Manufactured in Spokane, WA
- 36” panel coverage
- 3/4” rib height
- 29 Tru-Gauge™ steel
- Aluminum is recommended within 1000 of salt water (*not required*)
- Custom lengths 1’ to 45’ (*For longer length panels, please inquire*)
- 3:12 minimum pitch recommended when installed with butyl sealant
- Long length flashings available up to 20’ 11” (*For longer length options, please inquire*)
- OverEZee™ retro-fit systems available
- Fiberglass & Polycarbonate panels available to match profile
- Roof and vertical or horizontal wall application
- Perforated options available (*please inquire*)
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws

TESTING

- UL Code compliance UL Evaluation Report UL ER #25913-01
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - ZINCALUME® Plus/Galvalume® AZ-50/55
- ASTM E283 - Air infiltration (wall)
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E455-19 - Shear and Diaphragm. *(For engineering data, please inquire)*
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E1646 - Water infiltration (roof)
- ASTM E1680 - Air infiltration (roof)


TAYLOR METAL PRODUCTS

MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 29 gauge bare ZINCALUME® Plus AZ-55 *(No finish warranty – 25 yr. perforation warranty)*
- 29 gauge bare G-90 Galvanized *(No finish warranty – no perforation warranty)*
- ZINCALUME® & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® Plus is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

KEY FEATURES

- 21 Standard Colors, ZINCALUME® Plus and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
  - fading
  - chalking
  - chipping
  - cracking
  - peeling

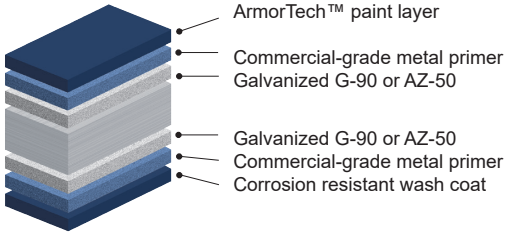

40-Year Residential Manufacturer's Limited Warranty

STANDARD ARMORTECH™ SMP COLORS

Polar White SRI-90
Glacier White SRI-85
Stone White SRI-71
Ivory SRI-68
Light Stone SRI-68
Sandstone SRI-55
Hickory SRI-48
Tahoe Blue SRI-25
Pacific Blue SRI-25
Sage Green SRI-31
Forest Green SRI-32
Pine Green SRI-29
Desert Brown SRI-24
Cocoa Brown SRI-27
Kodiak Brown SRI-22
Ash Grey SRI-58
Sterling Grey SRI-45
Charcoal Grey SRI-25
Weathered Copper SRI-24
Tile Red SRI-33
Obsidian Black SRI-N/A (formerly: Black)
Copper Penny SRI-50
Galvanized G-90 No finish warranty – no perforation warranty
ZINCALUME® Plus SRI-65 No finish warranty – 25 yr. perforation warranty

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
*SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing.***Oil Canning is not a cause for material rejection****

steelscape PPG ENERGY STAR

Rev. Date 07-26