


ROOF & WALL PROFILE LAP




ROOF & WALL PROFILE

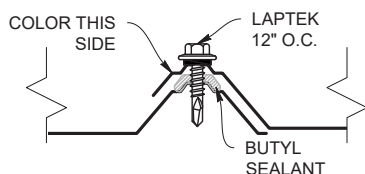

KEY FEATURES

- 36" Coverage Option
- 29 Tru-Gauge™
- 3/4" Vertical Rib
- 3:12 minimum pitch recommended when installed with butyl sealant
- Custom lengths 1' to 45'
(For longer length panels, please inquire)
- Long length flashings available up to 20' 11"
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws
- Roof and Vertical or Horizontal Wall application
- Perforated options available (please inquire)
- Fiberglass & Polycarbonate panels available to match profile
- Manufactured in Spokane WA
- OverEZee™ retro-fit systems available

TESTING


-  Code compliance UL Evaluation Report
UL ER #25913-01
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM E1680 - Air infiltration (roof)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1592 - Negative structural uniform static air pressure
- ASTM E330 - Positive structural uniform static air pressure
- ASTM E331 - Water infiltration (wall)
- ASTM E283 - Air infiltration (wall)
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - ZINCALUME® Plus/Galvalume® AZ-50/55
- ASTM E455-19 - Shear and Diaphragm.
(For engineering data, please inquire)

MATERIAL SPECIFICATIONS

- 29 gauge ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 29 gauge bare Zincolume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 29 gauge bare G-90 Galvanized (No finish warranty – no perforation warranty)
- Zincolume & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® Plus is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

KEY FEATURES

- 21 Standard Colors, ZINCALUME® Plus and Galvanized G-90
- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior Quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

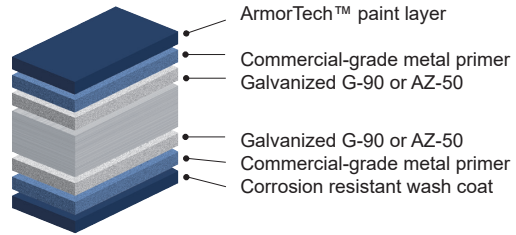

40-Year Residential Manufacturer's Limited Warranty

STANDARD ARMORTECH™ SMP COLORS



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***



Rev. Date 04-26