

## KEY FEATURES

- Center pencil rib
- Vented option for soffit application
- No visible fasteners
- On-site roll forming available
- Made from high-tensile steel for superior load capacity
- All painted materials have corrosion resistant metallic finish under the primer and topcoat
- ArmorTech™ SMP paint system with a 40 year written paint warranty
- Manufactured in Spokane WA
- Coverage: 16 inches
- Major Rib Height: 1"
- Major Rib Spacing: 16" O.C.
- Major Rib Configuration: Concealed, Interlocking
- Fastening: Concealed, screws or nails
- Thickness: 26ga, 24ga
- Base Metal: 80 ksi steel
- Options: Vented (5.1 sq in/sf), Non-Vented, Striated or Flat Pan

**26 GA SW-16 Allowable Gravity Loads (psf)**


Span	2'	2.5'	3'	3.5'	4'	4.5'	5'
<b>Simple Span</b>	120.2	94.2	64.5	45.4	31.2	21.9	16.0
<b>Two-Span</b>	106.5	69.1	48.4	35.7	27.5	21.7	20.5
<b>Multi-Span</b>	122.8	80.1	56.2	41.5	31.9	25.3	20.5

## MATERIAL SPECIFICATIONS

- 26 gauge ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 26 gauge bare ZINCALUME® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 26 gauge bare G-90 Galvanized (No finish warranty – no perforation warranty)
- 24 gauge Kynar 500® Painted Steel (inquire)

## FINISHES

- ArmorTech™ Paint System - excellent in exterior durability
- Color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
  - fading
  - chalking
  - chipping
  - cracking
  - peeling

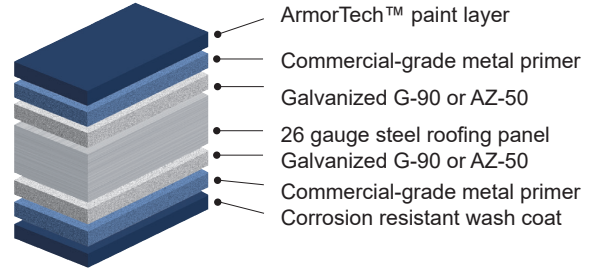

### 40-Year Residential Manufacturer's Limited Warranty

## STANDARD ARMORTECH™ SMP COLORS



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. \*\*\*Oil Canning is not a cause for material rejection\*\*\*



Rev. Date 6-25