

TAYLOR METAL PRODUCTS

Loc-Rib™
ROOF AND WALL

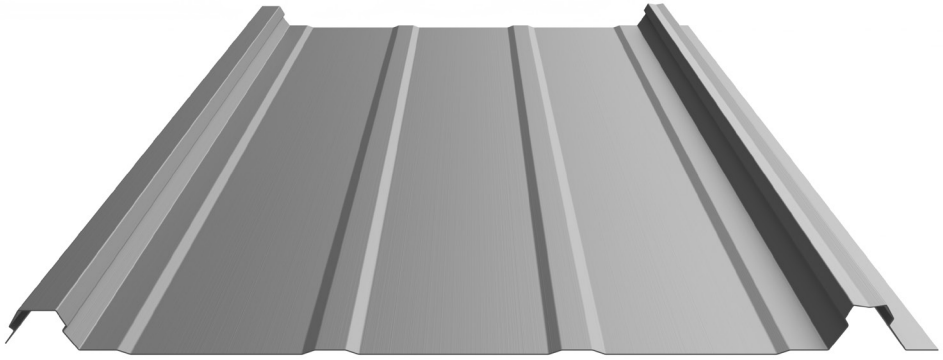



KEY FEATURES

- Manufactured in Spokane, WA
- 16” coverage option
- 7/8” rib height
- 26 & 24 Tru-Gauge™ steel
- Aluminum recommened within 1000 ft of salt water (*not required*)
- 3’ to 40’ panel lengths (*please inquire for shorter or longer panels*)
- Panel options: Accent Ribs
- 3:12 minimum pitch recommended (*Inquire for lower pitches*)
- Concealed fasteners: fasteners cannot leak
- Snap lock rib — no mechanical seaming
- Made from high-tensile steel for superior load capacity
- All painted materials have corrosion resistant metallic finish under the primer and topcoat
- Interlocking rib with mastic recess insures a positive lock and a weathertight seal
- ArmorTech™ SMP paint system with a 40 year written paint warranty

TESTING

- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available

WEIGHT TABLE

Loc-Rib	WIDTH	26 GA STEEL	24 GA STEEL
THICKNESS		0.019"	0.024"
WEIGHT/LINFT	16"	1.404 LBS	1.657 LBS
WEIGHT/SQFT	16"	1.053 LBS	1.243 LBS