




LAP DETAIL

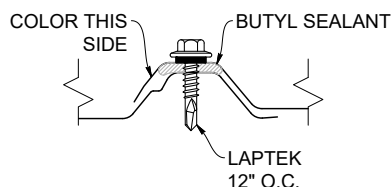


LAP DETAIL

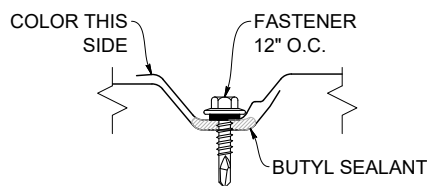

ROOF & WALL PROFILE



OPTIONAL WALL PROFILE



KEY FEATURES

- Manufactured in Auburn, WA.
- 36" panel coverage
- 5/8" rib height
- 29 Tru-GaugeTM steel
- 3:12 minimum pitch recommended when installed with butyl sealant
- 1' to 45' panel lengths
(*Inquire for longer length panels*)
- 20' 11" long length flashings
(*Inquire for longer length flashings*)
- OverEZeeTM Retro-fit systems available
- Polycarbonate panels available to match profile
- Roof & vertical or horizontal wall application
- Standard trim, custom trim and accessory packages available
- Color matched neoprene washered screws

TESTING

- UL 790 Class A (ASTM E108) - Fire rated (*Coming Soon*)
- UL 2218 Class 4 - Impact (hail) rated (*Coming Soon*)
- ASTM A653/A924 - G-90 Galvanized
- ASTM A792 - ZINCALUME®/Galvalume® AZ-50/55
- ASTM D6578 - Anti-Graffiti (Kynar only)
- ASTM E283 - Air infiltration (wall)
- ASTM E331 - Water infiltration (wall)
- ASTM E455-19 - Shear and Diaphragm (*Coming Soon*)
- ASTM E1646 - Water infiltration (roof)
- ASTM E1680 - Air infiltration (roof)

MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲22 Tru-Gauge™ Kynar 500® Painted Steel
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 & 22 Tru-Gauge™ bare ZINCALUME® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .040" Kynar 500® Painted Aluminum (please inquire)
- 24 Tru-Gauge™ Bonderized
- Custom 20 & 18 Tru-Gauge™ and .050" and .063" Aluminum (please inquire)
- 16 OZ & 20 OZ Real Copper (please inquire)
- Kynar 500® and substrate testing data available
(See website)
- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar®(PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar500® trademarked name. ZINCALUME & ZINCALUME® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

SMP MATERIAL SPECIFICATIONS

- 26 Tru-Gauge™ ARMORTECH™ Painted Steel .019" (Thickness prior to painting)

STANDARD ARMORTECH™ SMP COLORS


40-Year Residential Manufacturer's Limited Warranty




STANDARD COOL KYNAR 500® COLORS

Limited Lifetime Residential Warranty / 40 Year Commercial Manufacturer's Limited Warranty


▲.22 Tru-Gauge™ ◆.032 Aluminum

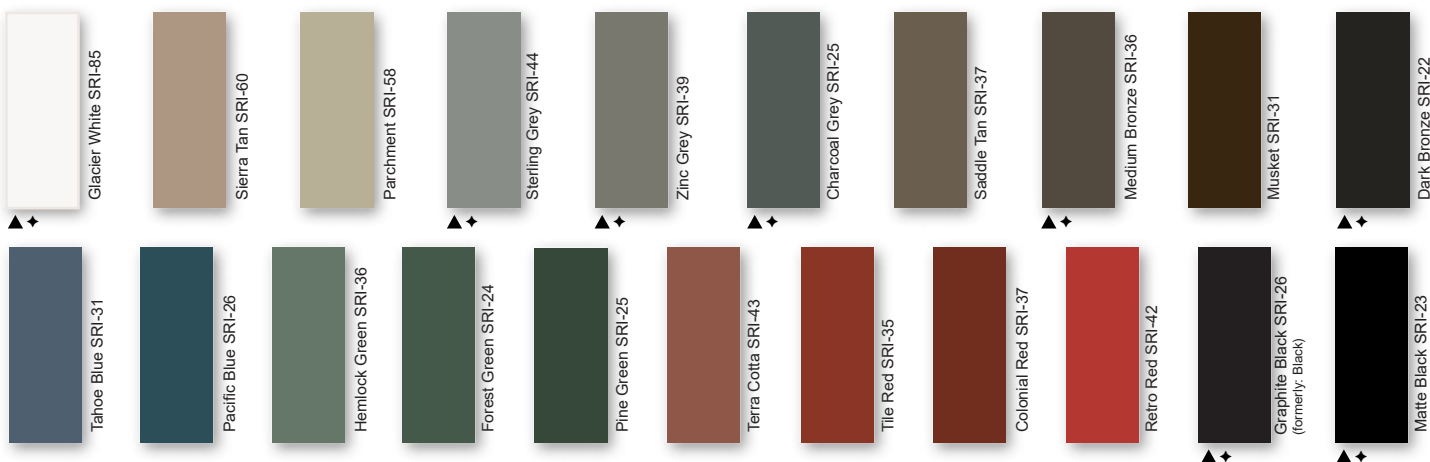

PREMIUM METALLIC COOL KYNAR® COLORS

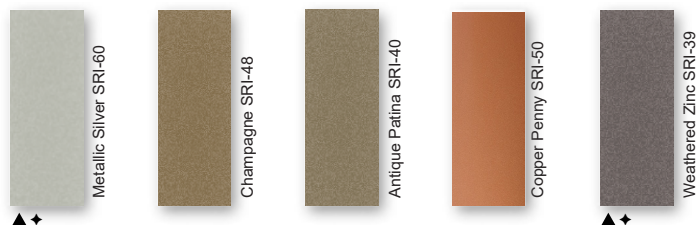

SPECIALIZED MATERIAL

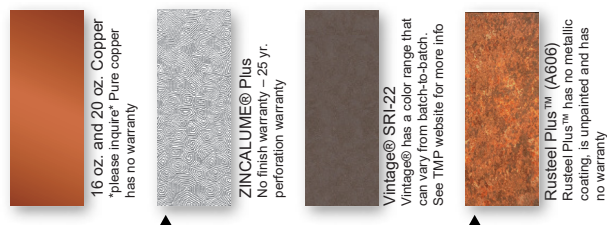

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflectance Index. SRI values listed above are in accordance with ASTM E 1890 and are based on actual testing.***Oil canning is not a cause for material rejection***



Rev. Date 09-26