


2-1/2" Corrugated is an economical, structural, light gauge exposed fastener roof and wall panel. It's an excellent choice for commercial, industrial and agricultural application. Also it's perfect for interior liner panels or an aesthetic wall panel.

2-1/2" CORRUGATED

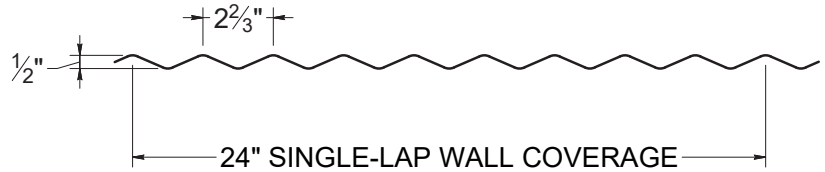

KEY FEATURES

- 29 and 26 gauge Tru-gauge™
- ASTM 653 and 792
- Unique design only requires single lap for roof applications
- Recommended minimum pitch 3:12
- Galvanized panels are convenient for animal confinement
- Long length flashings available up to 20'11"
- Panel is available in Zinalume® Plus AZ-55, Galvanized G-90, and 22 gauge Rusteel Plus™ (A606)
- Easy-to-order standard and custom made trim and accessory packages available for specific project needs
- Custom lengths 3' to 24'

Allowable Live Load in PSF			Span in feet (steel only)			
SPAN TYPE	GAUGE	KSI	2'	2' 6"	3'	4'
CONTINUOUS SPAN	26	80	138	88	61	35
CONTINUOUS SPAN	29	80	98	62	43	25

Gauge	LBS SQFT	LBS LF
29	0.6	1.33
26	0.89	1.97
22	1.46	2.92



Zinalume® Plus SRI-65
No finish warranty – 25 yr.
perforation warranty



Rusteel Plus™ (A606)
Rusteel Plus™ has no metallic
coating, is unpainted and has
no warranty



Galvanized G-90
No finish warranty - no
perforation warranty