


LOW PROFILE POLYESTER RIDGE VENT



PANELS: Easy-Lock™
StreamLine™
Premier-Lock™
SummitLine™

LP2

Custom contour seals tight and Python ventilates between the ribs.

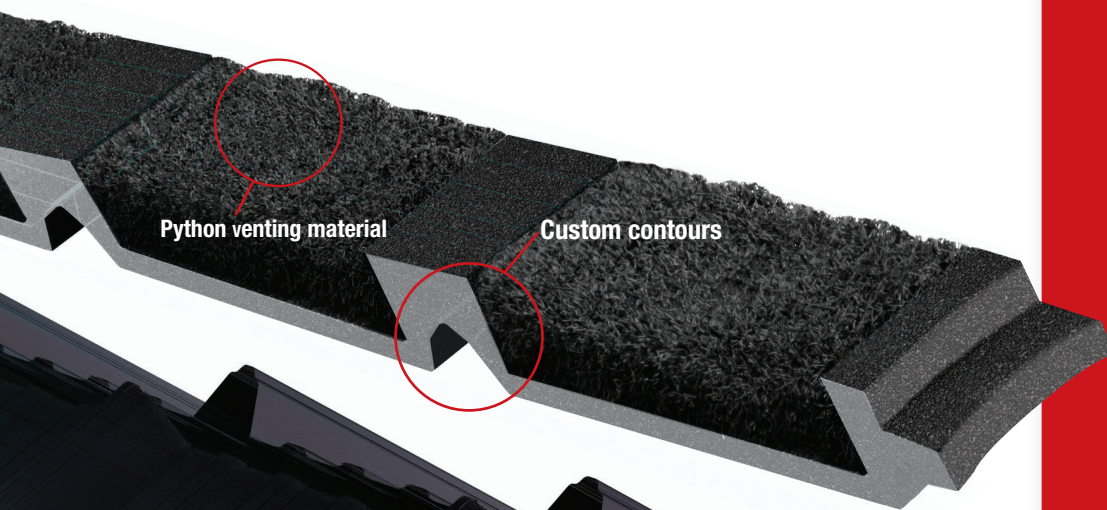

Python venting material

Custom contours

Eco-friendly, invisible ridge vent made from durable polyester fiber. Custom contours allow it to fit with most all major metal roofing profiles and pitches.

- Lower, custom-fit profile
- Moisture and pest barrier
- Non-obtrusive appearance
- Reduces utility costs
- One-person installation

WEATHER-TITE™ LP2™ RIDGE VENT is made from non-fabric-covered Python™ vent material. This strong, durable, modified polyester is a non-woven, non-wicking, fiber-based matting. Its specially cut contours are designed to provide a custom, low-profile fit for any pitch and most major metal roof profiles. LP2™ provides a superior net free ventilation area that still helps keep out moisture, pests and dust.

Plus, LP2™ can be installed by just one person in two steps. In fact, the screw bed and industrial strength peel and stick adhesive pre-applied to LP2™ makes this one of the easiest installations imaginable.

The patented LP2™ system improves ventilation, eliminates condensation, and is easy to install...at a cost lower than traditional fans and louvers.



One element of the Marco WEATHER-TITE™ SYSTEM

U.S. Patent Number 7,594,363; Second U.S. Patent Number 8,024,897 issued 09/27/11; Canadian Patent Number 2,503,414



FOAM CLOSURE

SEALANTS

VENTILATION

FLASHING

DOORS

FASTENERS

UNDERLAYMENT




SPECS & EASY INSTALL

See our installation animations online
at MarcoIndustries.com



Simply remove the peel and stick
strips to apply LP2



Install material, secure the ridge cap
over the LP2 with fasteners or nails

Net Free Area Varies with profile based on 19.4 square inches per
Linear Foot of ventilation material

Dimensions vary

Air Permeability..... →→760 Cubic Feet per minute

Cold Cracking -25° F

Snow Infiltration 0

Tear & Tensile Strength... Machine 25 ppi / Counter 25 ppi

Compressive Strength..... 1.8 psi @ 75%

Abrasion..... No Damage 100 mph Wind-driven

Rain No Leakage

LP2™ represents yet another Marco Industries development in
bringing you innovative, higher quality, and more economical
products for the building industry.

Marco
Weather-Tite®
System
Advantage

With Marco's Rapid Response™ get more of what you need faster and easier.
Take advantage of free shipping with low minimum orders. Marco - we're
big on customer service and small on hassle. Build it smart. Buy it smarter.

KEEP ENERGY
BILLS LOW
ENERGY EFFICIENT PRODUCT

MarcoIndustries.com

1.800.800.8590

