



12", 16" & 20" coverage options

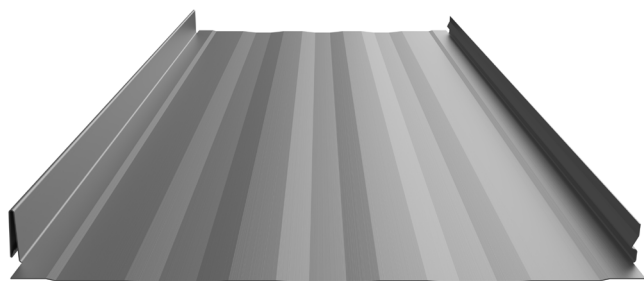


STRIATIONS

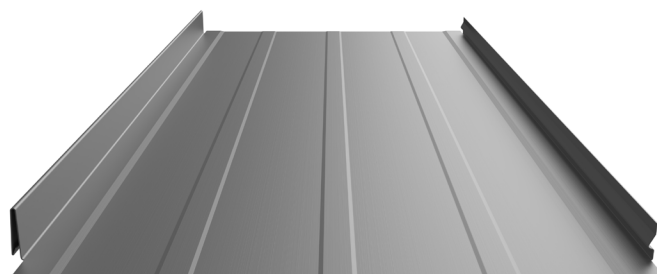

ACCENT RIBS

3 Accent ribs for 16" panel

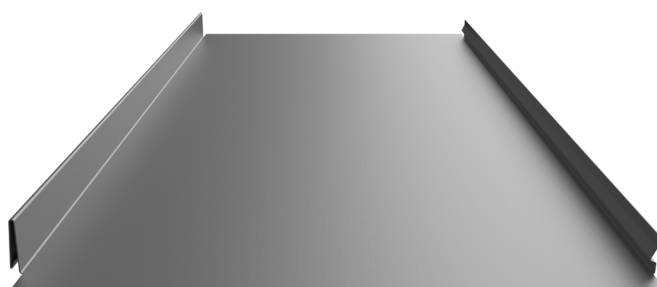




FLAT PAN

KEY FEATURES

- 12", 16" & 20" nominal coverage options
(Nominal coverage - panel coverage can vary slightly with some panel configurations. Inquire for more details)
- 24 & 22 Tru-Gauge
- 16 & 20 oz. Copper *(Please inquire)*
- Floating clip system: allows for expansion & contraction of panels in longer lengths
- 1-1/2" vertical rib
- Standard factory notched panels
- Concealed fasteners: fasteners cannot leak
- 3:12 minimum pitch recommended
(For lower pitches, please inquire)
- Standard panel lengths 4' to 60'
Minimum length 3' Notched
Minimum length 1' Not Notched
(For longer panels, please inquire)
- 2' Shortcut capability *(Fee applicable)*
- Onsite roll forming available
- Panel options: Striations, Accent Ribs, and Flat Pan
- Manufactured in Salem, OR

TESTING

-  ICC EVALUATION SERVICE® ICC #5046 with CBC-CRC Supplement
-  Code compliance UL Evaluation Report UL ER #25913-01
- UL Construction No. 589
(Slim-Lock™ carries its UL Classifications under the Clip-Lock 150 (CA) profile designation)
- UL 580 Class 90 - Wind Uplift
- UL 790 Class A (ASTM E108) - Fire rated
- UL 2218 Class 4 - Impact (hail) rated
- ASTM A653/A924 - G90 Galvanized
- ASTM A792 - Zincalume/Galvalume AZ-50/55
- ASTM E2886 - Ember Resistant ridge/endwall/peak flashings available




MATERIAL SPECIFICATIONS


- 24 gauge Kynar 500® Painted Steel G-90 Galvanized or AZ-50
- 24 & 22 gauge bare Zincolume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- ▲ 22 gauge Kynar 500® Painted Steel G-90 Galvanized or AZ-50
- 16 and 20 ounce Copper (Please inquire)
- Kynar 500® and substrate testing data available (See website)
- “Oil Canning” is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection
- PVDF is a fluoropolymer that is manufactured under the trademarked names Kynar 500® and Duranar® (PPG). Paint finishes containing a minimum 70% PVDF resin meet the high-performance weathering criteria established by the American Architectural Manufacturing Association and are allowed to carry the Kynar 500® trademarked name. Zincolume & Zincolume® Plus are registered trademarks of Bluescope Ltd. Galvalume® is a registered trademark of BIEC International, Inc. Vintage® is a registered trademark of Steelscape, Inc. Kynar® and Kynar 500® is a registered trademarks of Arkema, Inc.

FINISHES


- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Materials
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications

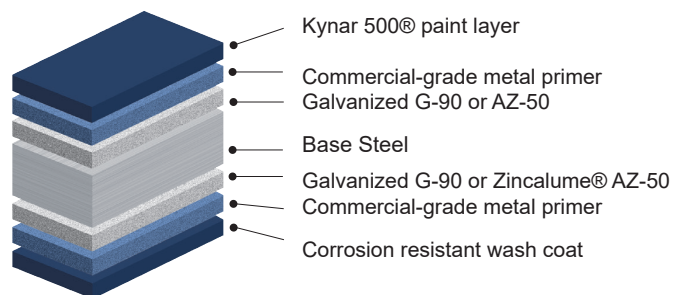


STANDARD COOL KYNAR 500® COLORS

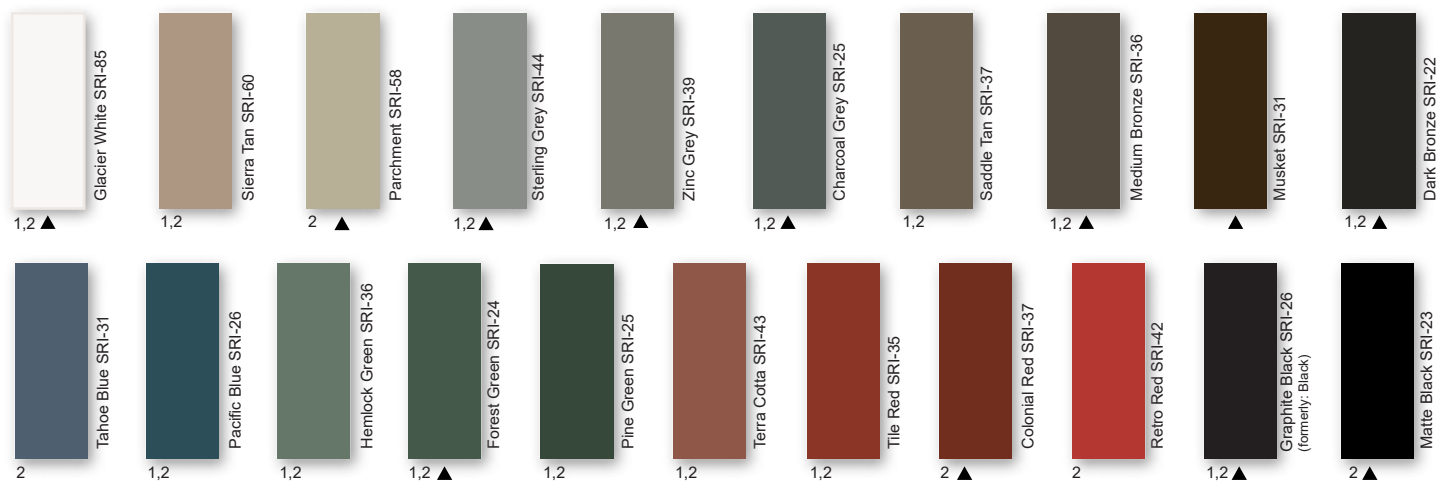

PREMIUM METALLIC COOL KYNAR® COLORS

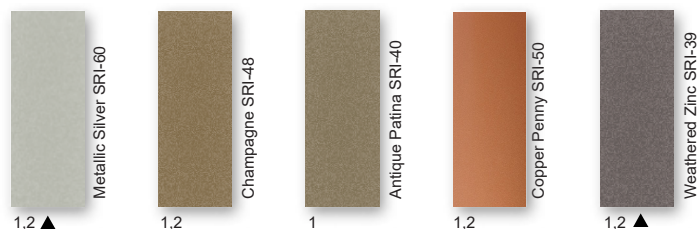

SPECIALIZED MATERIAL

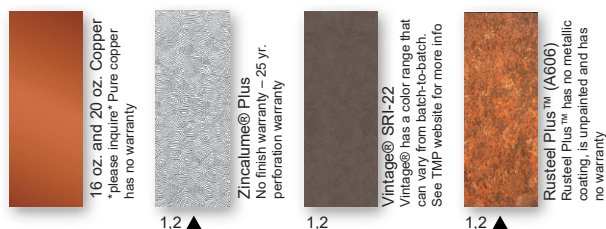

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and are based on actual testing.***Oil canning is not a cause for material rejection***

